

P/N : **03.02.508**


**VARIABLE COAXIAL ATTENUATOR**  
**DUAL 93dB - 80-1000MHz - USB/MANUAL**

**COMPONENTS**



SPECIFICATIONS	
<b>Bande de fréquence / Frequency bandwidth</b>	80-1000 MHz
<b>Dynamique d'atténuation / Attenuation range</b>	2 x 93 dB
<b>Pas d'atténuation / Attenuation step</b>	0,5 dB
<b>Vitesse changement / Attenuation change speed</b>	100 ns (RF, excl. control latency)
<b>Connecteurs RF / RF Connectors</b>	SMA female (x 4)
<b>Puissance max / Max input power</b>	+24 dBm
<b>Impédance / Impedance</b>	50 Ohms
<b>TOS / VSWR</b>	<1,65:1
<b>Pertes d'insertion / Insertion loss</b>	6 dB typ @ 1000 MHz
<b>Contrôle / Control</b>	Manual / USB / Software
<b>Interface de contrôle / Control interface</b>	Micro USB
<b>Alimentation / Power supply</b>	5V / 40mA, via USB
<b>Affichage / Display</b>	LCD

**DIMENSIONS - For reference only**

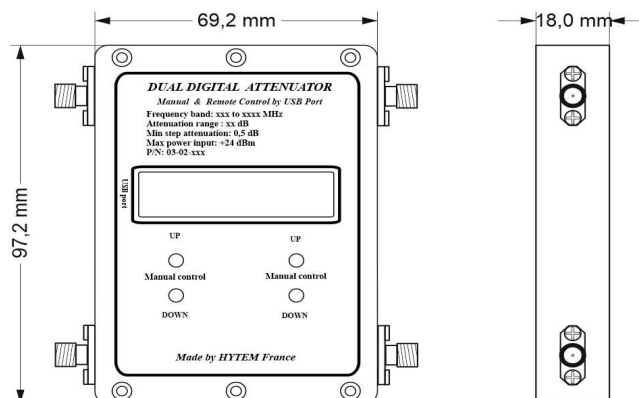

# P/N : 03.02.508

## USING SOFTWARE

Easy to use, our USB software can use sequence file to launch automatic attenuation versus time.

You can use Basic commands to control attenuation direction and to see graph.

Please refer to our free software help file on our download website.

