


P/N : **HY17F19T**



## N female bulkhead to SMA female Precision adapter

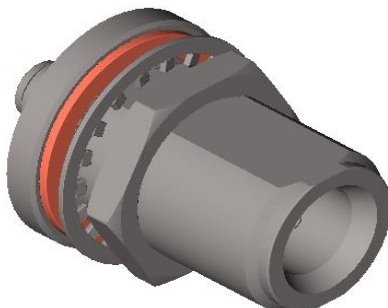

ADAPTERS

| SPECIFICATIONS                           |                                     |
|------------------------------------------|-------------------------------------|
| Connecteur 1 / Connector #1              | N female bulkhead                   |
| Connecteur 2 / Connector #2              | SMA female                          |
| <b>ELECTRIQUES / ELECTRICAL</b>          |                                     |
| Bande de fréquence / Frequency bandwidth | DC-18 GHz                           |
| Impédance / Impedance                    | 50 Ohms                             |
| TOS / VSWR                               | 1,20:1                              |
| <b>MECANIQUES / MECHANICAL</b>           |                                     |
| Gamme de température / Temperature range | -55°C / +165°C                      |
| Nombre de connections / Matings          | >500                                |
| <b>MATERIAU / MATERIAL</b>               |                                     |
| Corps / Body                             | Passivated stainless steel          |
| Contact central / Center contact         | Beryllium Copper Alloy, Gold plated |
| Isolant / Dielectric                     | PTFE                                |

### DIMENSIONS - For reference only

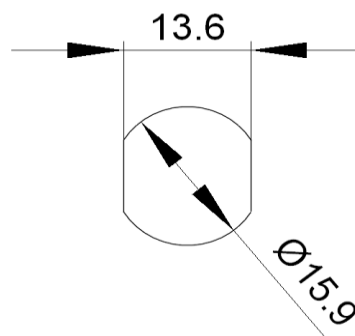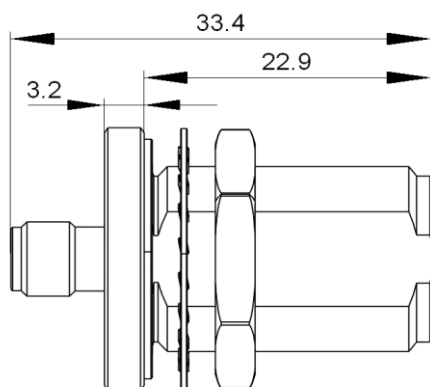

Panel cut dimensions