

P/N : 03.02.612

VARIABLE COAXIAL ATTENUATOR


DUAL 93dB - 20-500 MHz - USB/MANUAL

COMPONENTS



SPECIFICATIONS	
Bande de fréquence / Frequency bandwidth	20-500 MHz
Dynamique d'atténuation / Attenuation range	2 x 93 dB
Pas d'atténuation / Attenuation step	0,5 dB
Vitesse changement / Attenuation change speed	100 ns (RF, excl. control latency)
Connecteurs RF / RF Connectors	SMA female (x 4)
Puissance max / Max input power	+24 dBm
Impédance / Impedance	50 Ohms
TOS / VSWR	<1,80:1
Pertes d'insertion / Insertion loss	4 dB typ @ 500 MHz
Contrôle / Control	Manual / USB / Software
Interface de contrôle / Control interface	Micro USB
Alimentation / Power supply	5V / 40mA, via USB
Affichage / Display	LCD



DIMENSIONS - For reference only

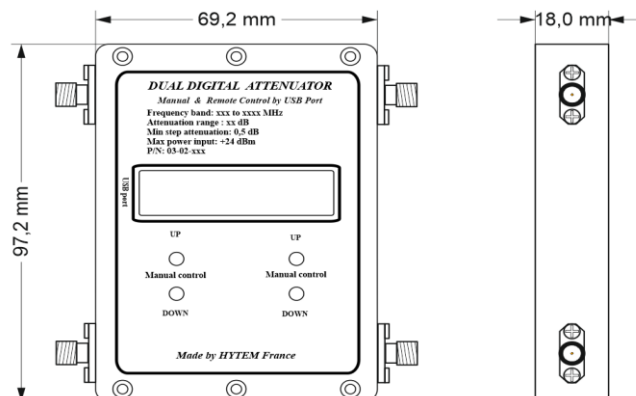

P/N : 03.02.612

USING SOFTWARE

Easy to use, our USB software can use sequence file to launch automatic attenuation versus time.
 You can use Basic commands to control attenuation direction and to see graph.
 Please refer to our free software help file on our download website.

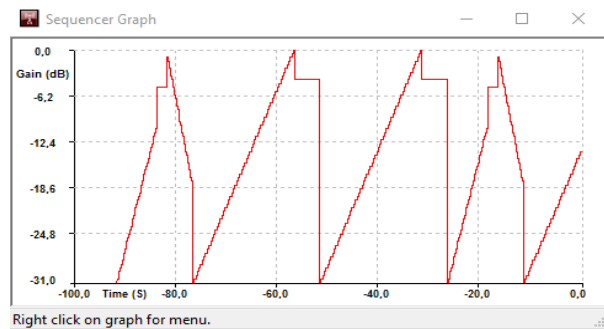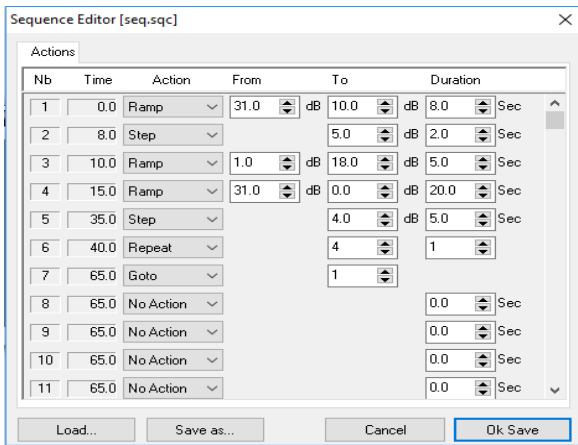

MEASUREMENTS

RETURN LOSS

INSERTION LOSS @0dB ATT

