

P/N : 03.02.894

4 WAY VARIABLE COAXIAL ATTENUATOR


93,75dB - 50-8000MHz - USB/ETHERNET

COMPONENTS



SPECIFICATIONS	
Bande de fréquence / <i>Frequency bandwidth</i>	50-8000 MHz
Dynamique d'atténuation / <i>Attenuation range</i>	4 x 93,75 dB
Pas d'atténuation / <i>Attenuation step</i>	0,25 dB
Vitesse changement / <i>Attenuation change speed</i>	100 ns (RF, excl. control latency)
Connecteurs RF / <i>RF Connectors</i>	SMA female (x 8)
Puissance max / <i>Max input power</i>	+24 dBm
Impédance / <i>Impedance</i>	50 Ohms
TOS / <i>VSWR</i>	<1,6:1
Pertes d'insertion / <i>Insertion loss</i>	14 dB typ @ 8000 MHz
Contrôle / <i>Control</i>	USB / ETHERNET
Interface de contrôle / <i>Control interface</i>	Micro USB / RJ45
Alimentation / <i>Power supply</i>	5V / 200mA, via USB or PoE
Affichage / <i>Display</i>	N/A

DIMENSIONS - For reference only

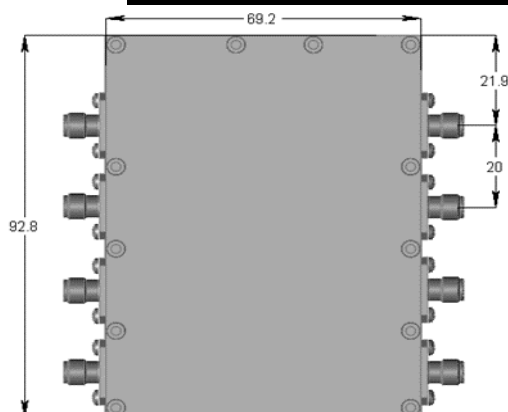

P/N : 03.02.894

USING SOFTWARE

Easy to use, our software can control attenuation values in real time, but also create file to run automatic attenuation vs time scripts



COM port: IP address: Serial number: HH.HH.HH Version: 1.5

ATT1 93.5 ATT2 93.5 ATT3 93.5 ATT4 93.5

93.5 x 93.5 x 93.5 x 93.5

Import your script

1	0.0 sec	No action	0.0 dB	93.5 dB	0.3 sec
2	0.3 sec	Ramp	0.0 dB	93.5 dB	1.0 sec
3	1.3 sec	Step	50 dB	1.0 dB	0.2 sec
4	1.5 sec	Repeat	1.0 dB	3.0 dB	0.3 sec
5	6.0 sec	Ramp	0.0 dB	93.5 dB	0.3 sec
6	6.3 sec	Go to	1.0 dB		