


P/N : **HY17F19TA**



N female bulkhead to SMA female Precision adapter

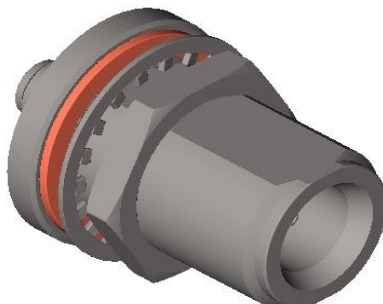

ADAPTERS

SPECIFICATIONS	
Connecteur 1 / Connector #1	N female bulkhead
Connecteur 2 / Connector #2	SMA female
ELECTRIQUES / ELECTRICAL	
Bande de fréquence / Frequency bandwidth	DC-18 GHz
Impédance / Impedance	50 Ohms
TOS / VSWR	<1,20:1
Pertes d'insertion / Insertion loss	<0,3dB@18GHz
MECANIQUES / MECHANICAL	
Gamme de température / Temperature range	-55°C / +165°C
Nombre de connections / Matings	>500
MATERIAU / MATERIAL	
Corps / Body	Passivated stainless steel
Contact central / Center contact	Beryllium Copper Alloy, Gold plated
Isolant / Dielectric	PTFE

DIMENSIONS - For reference only

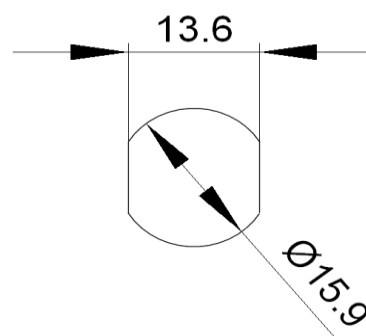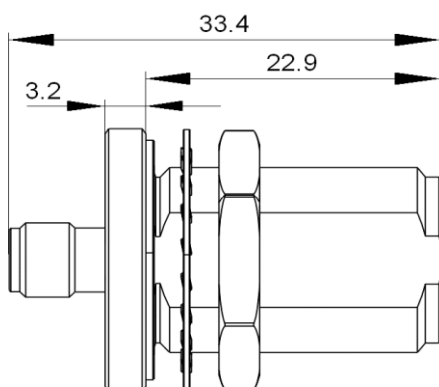

Panel cut dimensions