



Sensors, Test & Measurement Products



Table of Contents

2-7



ANALYZERS

8-19



SEMICONDUCTOR PRODUCTS

20-26



FIELD POWER SENSORS

27-35



POWER MONITORS

36-49



POWER METERS

50-61




LOADS & ATTENUATORS

62-67



ACCESSORIES

68-70

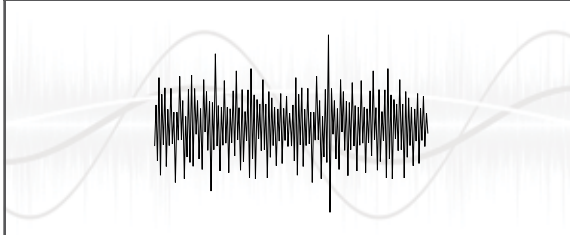

TECHNICAL DATA

SiteHawk Analyzer

Models SK-200-TC, SK-4500-TC



**Works with the
Bird RF Meter App!**
Free download from Google Play Store

- Easy to operate and field ready for first-time, occasional and experienced users.
- FDR (Frequency Domain Reflectometry) measurement method results in a highly reliable assessment of the health of critical components in your system; ultimately providing a “heads-up” before a failure occurs.
- Fault location or DTF mode indicates VSWR or Return Loss levels at each point along the cable and antenna system length.
- Cable Loss function measures insertion loss of the cable system over a given frequency range.
- Units cover frequency ranges of 300 kHz-200 MHz and 1-4500 MHz.
- USB communication port for connection to storage device and battery charging.
- Three year warranty!
- Includes Bird RF Meter app.

STANDARD ACCESSORIES – SK-200-TC (provided)

Calibration Combo	SK-CAL-MN-C
Stylus	SK-TP-112
AC Adapter (5 Vdc Output)	5B2229-510H-3
Hard Carrying Case	7002A218-2
USB Interface Cable, Power, 1 meter long	5A2653-3R5NL4
RF Cable, 1.0 meter long	SK-TC-MNFN-1M

Instruction Manual	920-SK-4000
Soft Carrying Case	7002A219-1
USB Drive	5A2745-1
USB Interface Cable, 15 cm long	5A2653-0R4NL5
Battery	BIRD-BTY-TMI3C

STANDARD ACCESSORIES – SK-4500-TC (provided)

Calibration Combo	SK-CAL-MN-C
Stylus	SK-TP-112
AC Adapter (12 Vdc Output)	SK05T-12003002
Hard Carrying Case	7002A218-2
RF Cable, 1.0 meter long	SK-TC-MNFN-1M
Instruction Manual	920-SK-4500

Soft Carrying Case	7002A219-1
USB Drive	5A2745-1
USB OTG Connector	SK-CONN-OTG-2
Charging Dock	SK-DOCK-1203

OPTIONAL ACCESSORIES

Adapter, N(m) to 7-16 DIN(f) PA-MNFE

International Adapter 5A5002-6

SiteHawk Analyzer

Models SK-200-TC, SK-4500-TC

	SK-200-TC	SK-4500-TC
Frequency Range	300 kHz to 200 MHz	1 MHz - 4500 MHz
Frequency Accuracy	±2.5x10 ⁻⁶	
Frequency Resolution	1 kHz	
Output Power	-10dBm	
Reflect Amplitude Accuracy	-15 dB to 0 dB : 0.4 dB -25 dB to -15 dB: 1.5 dB -35 dB to -25 dB: 4.0 dB	
Trace Noise Amplitude (IFBW 1kHz)	0.02 dB rms	
Measurement Speed	1 ms / data point	
Measurement Points	51 to 3201	
Measure Bandwidth	100 Hz to 30kHz	
Temperature Stability	0.01 dB/°F, 0.02 dB/°C	
Return Loss Measurement Range	0 dB to -60 dB	
Resolution	0.01 dB	
VSWR Measurement Range	1.0 to 65.0	
Cable Loss Measurement Range	0 dB to 30 dB	
DTF Range	0 to 5000 (ft), 0 to 1500 (m)	
Test Port Connector Impedance	N-type, Female 50 ohms	
Connector	Micro USB B, USB 2.0	USB Type-C, USB 3.0
Languages	English, Chinese, Spanish	
Recommended Calibration Interval	3 Year	
Dimensions (LxWxH)	7.2" x 3.8" x 1.9" (182mm x 95mm x 46.5mm)	7.7" x 3.6" x 2.4" (195mm x 90mm x 60mm)
Weight	1.98 (lbs), 0.9 (kg)	
Max Input Voltage	50V	
Operates In Temperature	14°F to 131°F / -10°C to +55°C	
Storage Temperature	-40°F to 176°F / -40°C to +80°C	
Battery Charging Temperature	32°F to 95°F / 0°C to +35°C	
Battery Charge Time	5 Hrs Full Charge	
Battery	Lithium-ion rechargeable	
Battery Typical Operating Time	4 Hrs	10 Hrs
Storage Capacity	Thousands of Traces and Setups	
Immunity to Interfering Signals	+13dBm	
CE		
EMC	Standard EN 61326-1:2006	
Safety	Standard EN 71010-1:2001	
Power Measurement	Yes	
Compatible With	For a complete list of compatible sensors, see Bird's RF Meter page: http://bit.ly/rfmeterrapp	

SignalHawk™

SH-42S



- New Small Form Factor Spectrum Analyzer
- Modular RF Design
- Ships in hard carry case and includes a full set of standard accessories
- Competitive low price

ANALYZERS

Frequency Range	10 MHz to 4.2 GHz
Reference Aging	±1 ppm
Frequency Span Accuracy	±1%
Sweep Time	1.1ms ~ 1600s
Bandwidth Range	10 Hz ~ 5 MHz
Bandwidth Accuracy	≥ 1 MHz, ±10% , < 1 MHz, ±2%
Measurement Range	DANL to +20 dBm
Input Attenuator Range	0 ~ 30dB, 1dB step
Max Safe Input Level Sensitivity	Preamp Off: +20 dBm Preamp +20 dBm: 0 dBm Preamp +40 dBm: -20 dBm
Reference Level Range (Ref Level Offset: ON)	-140 dBm ~ +20 dBm -190 dBm ~ +70 dBm
Amplitude Accuracy	-5 to -30 dBm, ±1.5 dBm
Switching Uncertainty	±0.3 dB
Input Attenuator Level Accuracy	±0.6 dB
	Preamp Off: 1 GHz, -131 dBm/Hz (Typ -133 dBm/Hz)
Average Noise Level Sensitivity	Preamp +20 dBm: 1 GHz, -151 dBm/Hz (Typ -153 dBm/Hz) Preamp +40 dBm: 1 GHz, -168 dBm/Hz (Typ -169 dBm/Hz)
Powe Measurement	Yes
Compatible With	For a complete list of compatible sensors, see Bird's RF Meter page: http://bit.ly/rfmeterapp

Residual Responses	-75 dBm
Input Related Responses	
10 MHz - 1.285 GHz	-70 dBc
1.285 GHz - 1.625 GHz	-42 dBc
1.625 GHz - 1.775 GHz	-55 dBc
1.775 GHz - 2.35 GHz	-42 dBc
2.35 GHz - 2.71 GHz	-25 dBc
2.71 GHz - 3.22 GHz	-42 dBc
3.22 GHz - 3.7GHz	-70 dBc
3.7 GHz - 4.2 GHz	-70 dBc
Second Harmonic	1.6 Ghz - 70 dBc
Third Order Intercept	+15 dBm (-10 dBm tones, 1MHz apart, Sensitivity LOW, Reference Level -10dBm)
P1dB	+5 dBm Nominal
Phase Noise	-96 dBc/Hz @10 kHz(Typ -98 dBc/Hz) -118 dBc/Hz @1 MHz(Typ -120 dBc/Hz)
Connectors	RF In: N type, female, 50 Ω USB: Type C Power Interface: Slim Tip, DC20V
Display	5.5 in. 1280 *720p
Operating System	Android
Battery Operating Time	6 hours
Battery Charging Time	2.5 hours
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 70°C
Size	7.8 in x 3.9 in x 2.6 in (200mm x 99mm x 67mm)
Weight	2.3 - 2.8 lb (1.05 - 1.25 kg)

STANDARD ACCESSORIES

Hard Carry Case	SPM-AS007
Soft Carry Case	SPM-AS008
AC Power Adapter	SPM-AS001
AC Power cable (US standard).	SPM-AS003
USB Cable	SPM-AS004

USB OTG Cable	SPM-AS005
Touch Pen	SPM-AS006
USB Drive	SPM-AS009
Manual920-SH-42S
Battery	SPM-021

Rack Mount SignalHawk™

Model SH-36S-RM



- Over an Ethernet network, remotely analyze the performance of your system
- Diagnose problems from any computer on your network, whether in the same room or across the country
- High Performance in a Rack-Mount Spectrum Analyzer
- Fast, Accurate, and Sensitive: 66 dB Dynamic Range and -135 dBm Noise Floor
- Minimal Rack Space Required: Only 2 RU
- Eliminates trips to difficult remote locations
- Multiple sites can be monitored from one centralized location



ANALYZERS

Frequency Range	100 kHz to 3.6 GHz
Frequency Resolution	1 Hz
Frequency Uncertainty	± 1 ppm
Reference Aging	± 1 ppm / year
Temperature Drift	± 1 ppm / °C
Spectral Purity	-85 dBc @ 30 kHz
Sweep Time	2 s, full span; 1 ms, zero span
Resolution Bandwidth	100 Hz to 1 MHz RBW
Video Bandwidth	10 Hz to 300 kHz VBW
Amplitude Accuracy	± 1.0 dB typ, ± 1.5 dB max
Dynamic Range	66 dB, intermod-free
Noise Floor	-135 dBm DANL

Attenuator	0, 10, 20, or 30 dB; internal
Pre-Amplifier	+24 dB gain, internal
Data Points	705 displayed (settable)
Single-Button Measurements	Occ BW, Channel Power, ACPR, Field Strength, AM/FM Demod, C/I
CE Compliant	Yes
RF Input, N(F)	+20 dBm (100 mW) max
Connectivity	Ethernet and USB 2.0
Operating & Store Temperature	0° to +50°C oper; -20° to +80°C store
Humidity & Altitude	95% humidity; 4600 m altitude
Size and Weight	19" x 10" x 3.5", 10 lbs.
Emissions Mask	IBOC, Analog FM, DTV and many others

OPTIONAL ACCESSORIES

Operators Manual	920-SHPC-OPS
Start-Up Instructions	920-SHPC-REF
USB Cable, 10 ft, USB A (M) to USB B (M)	5A2653-10
Attenuator, 100 W, 40 dB, N(M) to N(F), 2.4 GHz	100-SA-MFN-40
Attenuator, 50 W, 30 dB, N(M) to N(F), 4 GHz	50-A-MFN-30
Attenuator, 25 W, 30 dB, N(M) to N(F), 4 GHz	25-A-MFN-30
Attenuator, 10 W, 30 dB, N(M) to N(F), 4 GHz	10-A-MFN-30
Attenuator, 5 W, 20 dB, N(M) to N(F), 4 GHz	5-A-MFN-20
Attenuator, 2 W, 20 dB, N(M) to N(F), 4 GHz	2-A-MFN-20

Adapter, N(M) to 7/16 DIN(M)	PA-MNME
Adapter, N(F) to 7/16 DIN(M)	PA-FNME
Adapter, N(M) to 7/16 DIN(F)	PA-MNFE
Adapter, N(F) to 7/16 DIN(F)	PA-FNFE
Adapter Kit, 7/16 DIN	4240-550
Adapter, N(F) to N(F)	4240-500-1
Adapter, N(M) to N(M)	4240-500-6
Adapter, N(M) to SMA(F)	4240-500-10

NOTE: Spare standard accessories are available as optional accessories. Manuals and soft/firmware updates available at www.bird-electronic.com.

PC SignalHawk™

Model SH-36S-PC



- Transform your Laptop into a Spectrum Analyzer
- Fast, Accurate, and Sensitive: -135 dBm Noise Floor
- Same "Spectrum Analyzer" functionality as our hand held and rack mount units but in a convenient model
- Built in FCC Compliance Masks
- Waterfall display
- Sophisticated Spectrum Analysis software package included with the product
- Ideal solution for field techs who already carry a laptop with them as standard equipment

Frequency Range	100 kHz to 3.6 GHz
Frequency Resolution	1 Hz
Frequency Uncertainty	± 1 ppm
Reference Aging	± 1 ppm / year
Temperature Drift	± 1 ppm / °C
Spectral Purity	-85 dBc @ 30 kHz
Sweep Time	2 s, full span; 1 ms, zero span
Resolution Bandwidth	100 Hz to 1 MHz RBW
Video Bandwidth	10 Hz to 300 kHz VBW
Amplitude Accuracy	± 1.0 dB typ, ± 1.5 dB max
Dynamic Range	66 dB, intermod-free
Noise Floor	-135 dBm DANL

Attenuator	0, 10, 20, or 30 dB; internal
Pre-Amplifier	+24 dB gain, internal
Data Points	705 displayed (settable)
Single-Button Measurements	Occ BW, Channel Power, ACPR, Field Strength, AM/FM Demod, C/I
Environmental	Per MIL-PRF-28800F, Class 2
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001
RF Input, N(F)	+20 dBm (100 mW) max
Connectivity	USB 2.0
Operating & Store Temperature	0° to +50°C oper; -20° to +80°C store
Humidity & Altitude	95% humidity; 4600 m altitude
Size and Weight	7.5" x 7.0" x 3.0", 3.5 lbs
Emissions Mask	IBOC, Analog FM, DTV and many others

STANDARD ACCESSORIES

Operators Manual	920-SHPC-OPS	Car Adapter/Charger	5A2238-3
Start-Up Instructions	920-SHPC-REF	Internal Li-Ion Battery, Field Replaceable	RPK5B2431
USB Cable, 10 ft, USB A (M) to USB B (M)	5A2653-10	PC Tool Software and Manual CD's	7002A148
AC Adapter/Charger	5A2436		

Antenna Testers

AT Series



- Cost-effective, fast, graphical way of determining the quality of mobile and base station antennas
- Rugged, easy-to-use, hand-held design with extended battery life makes it ideal for use in the field
- Tests the system in VSWR, Return Loss, Match Efficiency, or Reflection Coefficient (Rho)
- Single frequency readings and frequency sweeps allow for everything from pin-point tests to system optimization and tuning
- Can save up to 12 traces for comparison and tracking over time
- RS232 Interface allows communication

ANALYZERS

	AT-500	AT-800
Frequency Range	2 - 520 MHz	806 - 960 MHz
Frequency Resolution	20 kHz	30 kHz
Frequency Accuracy	±50 kHz	±100 kHz
Measurement Range	VSWR: 1.00 - 99.99, Match Efficiency: 00 to 100.0%, Return Loss: 0.0 to -32.0 dB	
Measurement Speed (Typical)	Single Frequency: 5 readings/second, Swept Frequency: 1 sweep/second	
Preprogrammed Bands	—	AMPS, NADC, GSM, PDC, CT2
Field Strength	0 to 100% (relative) Sensitivity for Full-scale deflection: 0.22 v/m @ 400 MHz	
Test Port	Impedance: 50 ohm, nominal. Connector (others available) N (F)	
Interface	Serial (female DB-9 connector)	
Power Requirements	Batteries: 6 rechargeable AA (KR-15/51) External DC: 11-16 VDC, External AC Adapter: 108-132 VAC @ 57-63 Hz, or 207-253 VAC @ 48-52 Hz	
Operating Temperature	0°C to 50°C (32°F to 122°F)	
Storage Temperature	-41°C to 71°C (-40°F to 160°F)	
Size (including connector)	8" H x 4 5/8" W x 1 3/4" D, (205 mm x 118mm x 42 mm)	
Weight	1 3/4 lbs. (0.8 kg)	
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001	

STANDARD ACCESSORIES

Battery, NiMH, 1.2V AA.....	5B2230	Antenna - 900MHz TNC/f.....	5A2228-1
Connector, N(f).....	4240-403	Book, Instruction.....	920-AT500
Antenna - UHF N(m).....	5A2228-3	Fuse.....	RP5-1976-11

OPTIONAL ACCESSORIES

N/m Adapter.....	4240-402	SMA/m Adapter.....	4240-410
BNC/m Adapter.....	4240-404	SMA/f Adapter.....	4240-411
BNC/f Adapter.....	4240-405	Cigarette Lighter Adapter.....	5A2238-1
TNC/m Adapter.....	4240-406	Verification Kit, AT-500.....	7000A545
TNC/f Adapter.....	4240-407	Verification Kit, AT-800.....	7000A845
UHF/m Adapter.....	4240-408	Carrying Case.....	5000-030
UHF/f Adapter.....	4240-409		



- System of matched components calibrated for superior accuracy
- Measures voltage, current and the phase angle in complex applications
- Up to 3 fundamental frequencies can be measured simultaneously
- Proprietary architecture maintains correct phase angle information between the fundamental and harmonics
- Harmonic Levels up to 150 MHz are available for analysis



Frequency Range	300 kHz - 150 MHz (Sensor Dependent)
Frequency Resolution	100 Hz
Frequency Accuracy	± 1 kHz
Harmonics	10 maximum, up to 150 MHz (Sensor Dependent)
Number of fundamentals (F0)	Maximum of 3 simultaneously
Digital	> Voltage, current, phase, frequency, impedance, power at frequencies selected by user
Analog	5 Outputs, 0-10Vdc, 1000Ω-source
Update Rates	60 Hz typical for 1 fundamental (Note 1)
Network Protocol	DeviceNet, Ethernet

RF Power, Max	10 kW or maximum power limit of RF connector (Note 2)
RF Connector	Custom or QC
Receiver Operating Temp.	+20 to +40 °C (68 to 104 °F)
Receiver Storage Temp.	-20 to +80 °C (-4 to +176 °F)
Cable Operating Temp.	0 to +100 °C (32 to 212 °F)
Cable Storage Temp.	-20 to +100 °C (-4 to 212 °F)
Sensor Operating/Storage Temp.	Refer to Sensor Specification
Humidity, Max;	85% Non-condensing
Air Pressure, Min.	745 mbar (equivalent to 2,500 m/ 8,200 ft. max altitude)
Operating Power	11-24 Vdc, 1.4-3A input to receiver

Parameter	Voltage	Current	Phase Angle
Measurement	RF: 1 to 3000 V _{rms} (Note 2)	0.1 to 100 A _{rms} (Note 2)	-180° to + 180°
Resolution	IEEE 754 Single Precision Floating Point		
Uncertainty 300 kHz-1 MHz (Note 3)	for F _n , ± 0.5 V or 1% of reading whichever is greater for F _n , ± 1.0 V or 2% of reading, whichever is greater (95% confidence interval)	for F _n , ± 0.05 A or 1% of reading whichever is greater for F _n , ± 0.10 A or 2% of reading, whichever is greater (95% confidence interval)	Absolute Angle: for F _n > 10 V, 1 A: ±1° for F _n < 10 V, 1 A: ±4° for F _n > 10 V, 1 A: ±2° for F _n < 10 V, 1 A: ±6° (95% confidence interval)
Uncertainty 1-100 MHz (Note 3)	for F _n , ± 0.1 V or 1% of reading whichever is greater for F _n , ± 0.2 V or 2% of reading, whichever is greater (95% confidence interval)	for F _n , ± 0.01 A or 1% of reading whichever is greater for F _n , ± 0.02 A or 2% of reading, whichever is greater (95% confidence interval)	Absolute Angle: for F _n > 10 V, 1 A: ±1° for F _n < 10 V, 1 A: ±4° for F _n > 10 V, 1 A: ±2° for F _n < 10 V, 1 A: ±6° (95% confidence interval)
Uncertainty 100-150 MHz (Note 3)	for F _n , ± 0.2 V or 2% of reading whichever is greater for F _n , ± 0.4 V or 4% of reading, whichever is greater (95% confidence interval)	for F _n , ± 0.02 A or 2% of reading whichever is greater for F _n , ± 0.04 A or 4% of reading, whichever is great (95% confidence interval)	Absolute Angle: for F _n > 10 V, 1 A: ±2° for F _n < 10 V, 1 A: ±8° for F _n > 10 V, 1 A: ±4° for F _n < 10 V, 1 A: ±12° (95% confidence interval)
Receiver Temperature Derating - from 25 °C	± 0.05% / °C	± 0.05% / °C	± 0.1 / °C

Note 1: Typical data rate for 1 fundamental, 10 harmonics, auto-ADC mode, and no averaging is 60 Hz. Data rate can vary significantly depending on configuration, network traffic, and host performance.

Note 2: Maximum power is limited by the size of the sensor line section and connectors. See sensor specification document.

Note 3: At customer specified frequencies.

Diagnostic System

BDS Series



- Measure multiple fundamental, harmonic and intermodulation frequencies
- Measures voltage and current in complex applications
- Operates while maintaining the phase angle of each measurement
- Enables users to identify small process discrepancies
- Works in environments with variable impedance
- An incredible tool for researching new RF technologies and repeating high precision processes

Frequency Range	1 MHz - 500 MHz (Sensor Dependent)
Frequency Resolution	100 Hz
Frequency Accuracy	± 1 kHz
Harmonics	15 maximum, up to 500 MHz (Sensor Dependent)
Number of fundamentals (F0)	Maximum of 5 simultaneously
Digital	> Voltage, current, phase, frequency, impedance, power at frequencies selected by user
Analog	5 Outputs, 0-10Vdc, 1000Ω-source
Update Rates	60 Hz typical for 1 fundamental (Note 1)
Network Protocol	DeviceNet, Ethernet
RF Power, Max	10 kW or maximum power limit of RF connector (Note 2)
RF Connector	Custom or QC

Receiver Operating Temp.	+20 to +40 °C (68 to 104 °F)
Receiver Storage Temp.	-20 to +80 °C (-4 to +176 °F)
Cable Operating Temp.	0 to +100 °C (32 to 212 °F)
Cable Storage Temp.	-20 to +100 °C (-4 to 212 °F)
Sensor Operating/Storage Temp.	Refer to Sensor Specification
Humidity, Max;	85% Non-condensing
Air Pressure, Min.	745 mbar (equivalent to 2,500 m/ 8,200 ft. max altitude)
Operating Power	Sensor: Provide by receiver; Receiver: 11-24 Vdc, 1.4-3A
Environmental	MIL-PRF-28800F Class 3
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001
FCC	CFR 47 Part 18 C:2005 Radiated Emissions

Parameter	Voltage	Current	Phase Angle
Range	RF: 1 - 3000 V _{rms} DC Bias: 3500 V dc Breakdown: > 10kV @ 745 mbar, 100 °C (Note 2)	0.1 - 100 A _{rms} (Note 2)	-180° to +180° Resolution: 0.1°
Uncertainty 1-100 MHz (Note 3)	± 0.2V or 2% of reading whichever is greater (95% confidence interval)	± 0.2V or 2% of reading whichever is greater (95% confidence interval)	Absolute Angle: for F ₀ < 10V, 1A: ±1° for F ₀ < 10V, 1A: ±4° for F ₀ < 10V, 1A: ±2° for F _n < 10V, 1A: ±6° (95% confidence interval)
Uncertainty 100-500 MHz (Note 3)	± 0.3V or 3% of reading whichever is greater 25 W to 1 kW	± 0.3V or 3% of reading whichever is greater 25 W to 1 kW	Absolute Angle: for F ₀ < 10V, 1A: ±2° for F ₀ < 10V, 1A: ±8° for F ₀ < 10V, 1A: ±4° for F _n < 10V, 1A: ±12° (95% confidence interval)
Receiver Temperature Derating - from 25 °C	± 0.05% / °C	± 0.05% / °C	± 0.1 / °C

Note 1: Typical data rate for 1 fundamental, 10 harmonics, auto-ADC mode, and no averaging is 60 Hz. Data rate can vary significantly depending on configuration, network traffic, and host performance.

Note 2: Maximum power is limited by the size of the sensor line section and connectors. See sensor specification document.

Note 3: At customer specified frequencies.

SEMICONDUCTOR PRODUCTS



Power Sensors

4020 Series



- Cost-effective solution for maintaining critical RF systems
- Only 5 models are required to cover the frequency range of 100 KHz to 3 GHz and power range from 300 mW - 10 kW
- Full-Scale Accuracy $\pm 3\%$ for applications requiring accurate forward and reflected power measurement
- Direct plug-in operation with industry-standard Bird® 4421 Multifunction Power Meter
- Low insertion loss (<0.05 dB)

	4021	4022	4023A3G	4024	4025
Frequency Range	1.8-32 MHz	25 MHz-1 GHz	800-3000MHz	1.5-32 MHz	100 kHz-2.5 MHz
Power Input	300 mW to 1 kW (1.2 kW max.)		300mW to 200W	3 W to 10 kW (12 kW max.)	
Accuracy, Forward	$\pm 3\%$ of reading from rated Max to rated Min. VSWR Measurement Range				
VSWR Measurement Range	1.00 to 2.00 (40.0 to 9.5 dB Return Loss)				
Directivity, Min.	30 dB		28 dB	28 dB, 1.5-2.5 and 25-32 MHz 30 dB, 2.5-25 MHz	28 dB, 100-125 kHz 30 dB, 125-2500 kHz
Insertion Loss Max. (with female "N" connectors)	0.05 dB	0.05 dB, 25-512 MHz 0.13 dB, 512 MHz-1 GHz	0.15 dB	0.05 dB	
VSWR, Max.	1.05:1	1.05:1, 25-512 MHz 1.10:1, 512 MHz-1 GHz	1.10:1	1.05:1	
Sampling Rate	Nominal 2 readings per second				

POWER REQUIREMENTS

External DC 12 VDC, supplied from Bird 4421 Power Meter

PHYSICAL SPECIFICATIONS

Dimensions 5.2" L x 2.5" W x 3.25" H
(137 x 64 x 83 mm)

Weight 1lb., 11oz. (0.8 kg)

Connectors N (F) standard, other customer specified from QC list appropriate for frequency and power.

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature 0 to 50°C (32 to 122 °F)

Storage Temperature -20 to 70°C (-4 to +158 °F)

Humidity 95% maximum (non-condensing)

Altitude Up to 10,000 feet (3,048 m)

General EMC Designed to carry CE mark

Emissions EN-55011, 1991, Class B

Immunity EN-50082-1, 1995

Safety EN-61010, 1993 in accordance with Council Directives 73/23/EEC and 93/68/EEC

CE EMC EN 61326-1:2006

Calibration Cycle Nominal 1 year

Power Sensors

4027A Series



- Bird's® Precision power sensors for precision laboratory applications
- Designed to bring superb accuracy and ease of use together for the laboratory engineer
- Capable of 1% accuracy at the calibrated frequency and power levels
- Calibration traceable to the National Institute of Standards and Technology
- Plug and Play with 4421 Meter
- No field calibration required
- Dozens of connector options available
- Automatic frequency compensation scheme, eliminating the error due to directional coupler frequency response

POWER MEASUREMENT

Accuracy	±1% (1s) at calibration frequencies and power levels; ±2% at other frequencies and power levels.
Calibration Power Level	1000 W units: 700 watts. 10 kW units: 1700 watts.
VSWR Range	1.0 to 2.0 (40.00 to 9.5 dB return loss)
Directivity	28 dB
Insertion Loss	< 0.05dB
Uniformity	2% maximum unit to unit, at calibration frequency and power levels.
Speed	2 readings per second.
Maximum Power	10 kW units - 12 kW max. 1 kW units - 1.2 kW max.

CONNECTORS

Type	Customer specified
Sensor Interface	Latch-n-Lock

POWER REQUIREMENTS

External DC 12 VDC, supplied from Bird 4421 Power Meter

PHYSICAL SPECIFICATIONS

Dimensions	5.2" L x 2.5" W x 3.25" H
Weight	1 lb. 13 oz. (0.8 kg)
Operating Temperature	15°C to 35°C (59°F to 95°F)
Storage Temperature	-40°C to 80°C (-40°F to 176°F)
Humidity	95% maximum (non-condensing)
Altitude	Up to 10,000 feet (3,048 m)
General EMC	Designed to carry CE mark
Emissions	EN-55011, 1991, Class B
Immunity	EN-50082-1, 1995
Safety	EN-61010, 1993 in accordance with Council Directives 73/23/EEC and 93/68/EEC
CE	EMC EN 61326-1:2006
Calibration Cycle	6 month

POWER SENSOR SELECTION GUIDE

4027A SERIES	Power Range	Frequency
4027A12M	300mW to 1kW	10-15 MHz
4027A250K	3 W to 10kW	250-400 kHz
4027A400K	3 W to 10kW	400-550 kHz
4027A800K	3 W to 10kW	800-950 kHz
4027A2M	3 W to 10kW	1.5-2.5 MHz
4027A4M	3 W to 10kW	3-5 MHz
4027A10M	3 W to 10kW	10-15 MHz
4027A25M	3 W to 9kW	25-30 MHz
4027A35M	3 W to 7.5kW	35-45 MHz
4027A60M	3 W to 6kW	45-65 MHz
4027A100M	3 W to 4kW	95-105 MHz
4027A150M	3.75 W to 4kW	150-170 MHz

*For applications with harmonic content greater than -50 dBc, contact the factory for versions of the 4027A sensors with filtering included.

Power Sensors

4027F Series



- Bird's® Precision power sensors for precision laboratory applications
- Designed to bring superb accuracy and ease of use together the laboratory engineer
- Filtered Design eliminates the effects of amplitude modulation and harmonics from the measurement
- Capable of 1% accuracy at the calibrated frequency and power levels
- Calibration traceable to the National Institute of Standards and Technology
- Plug and Play with 4421 Meter
- No field calibration required
- Dozens of connector options available

POWER MEASUREMENT

Accuracy	±1% (1σ) at calibration frequencies and power levels; ±2% at other frequencies and power levels.
Accuracy, RFL	Forward Accuracy + [FWD Power/10^(Directivity/10)]
Accuracy, VSWR	Calculated from FWD and RFL Power VSWR = [1 + sqrt (PR/PF)] / [1 - sqrt (PR/PF)]
VSWR Range	1.0 to 2.0 (40.00 to 9.5 dB return loss)
Directivity, Min	28 dB
Insertion Loss, Max	0.05 dB (with female "N" connectors)
Impedance, Nominal	50 Ohms
Sampling Rate, Nominal	2 Readings/Seconds
Repeatability, Multiple Measurements Single Sensor	± 0.3% (95% C.I.) (with female "N" connectors)
VSWR, Max	1.05:1
Connectors	Customer specifies from QC list, appropriate for frequency and power.

POWER REQUIREMENTS

External DC 12 VDC, supplied from Bird 4421 Power Meter

PHYSICAL SPECIFICATIONS

Dimensions	5.2" L x 2.5" W x 3.25" H (137 x 64 x 83 mm)
Weight	1 lb. 13 oz. (0.8 kg)
Operating Temperature	0°C to 50°C (32°F to 122°F) (derate accuracy outside 25 ± 5°C)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	95% non-condensing
Altitude	10,000 feet (3,000 m)
General EMC	Designed to carry CE mark
Emissions	EN-55011, 1991, Class B
Immunity	EN-50082-1, 1995
Safety	EN-61010, 1993 in accordance with Council Directives 73/23/EEC and 93/68/EEC
CE	EMC EN 61326-1:2006
Calibration Cycle	6 months

	4027F2M	4027F10M	4027F60M
Frequency Range	1.8 MHz - 2.2 MHz	12 MHz - 15 MHz	57-63 MHz
RF Power Range	100 W-10 kW		100 W-6 kW
Calibration Frequencies, Typical	1.8, 2.0, 2.17 MHz	12.0, 12.5, 13.56, 14.0, 15.0 MHz	57.0, 58.5, 60.0, 61.5, 63 MHz
Calibration Power, Typical	1.7 kW		
Harmonic Rejection, Min.	26 dB @ 3.6-3.8 MHz, 30 dB @ >3.8 MHz	30 dB @ >25 MHz	30 dB @ >114.0 MHz
LF Rejection	Not Specified		30 dB @ < 15.0 MHz
Max. Error Induced By 10% AM	0.2% @ <5 kW, 1% @ 5-10 kW		0.2% @ <1.5 kW, 1% @ 1.5- 3 kW

Power Sensors

4028 Series



- Family of high accuracy sensors for use in high power LCD, TFT, Solar, and Semiconductor processes
- Achieve tighter, more consistent RF power measurements for improved yield
- $\pm 2\%$ accuracy at specified calibration frequencies and power levels
- Direct, plug-in operation with the Bird Model 4421 RF Power Meter
- Measures power levels up to 50kW
- 4028A Series sensor can be configured with a wide range of connectors

POWER MEASUREMENT

Accuracy	$\pm 2\%$ at calibration frequencies and power levels; $\pm 3\%$ at other frequencies and power levels. Add 2% to uncertainty outside $25 \pm 10^\circ\text{C}$
Calibration Power Level	1.7kW
VSWR Range	1.0 to 2.0 (40.00 to 9.5 dB return loss)
Directivity	28 dB
Insertion Loss	$< 0.05\text{dB}$
Uniformity	2% maximum unit to unit, at calibration frequency and power levels.
Speed	2 readings per second.
Maximum Power	4028AxxK: 20kW 4028AxxM: 25kW 4028B: 25kW 4028C: 50kW

CONNECTORS

4028A Series	Customer specified
4028B Series	1-5/8 EIA Flanged
4028C Series	3-1/8 EIA Flanged
Sensor Interface	Latch-n-Lock

POWER REQUIREMENTS

External DC	12 VDC, supplied from Bird 4421 Power Meter
--------------------	---

PHYSICAL SPECIFICATIONS

Dimensions	4.7" L x 3.2" W x 4.0" H (4028A Series) 6.8" L x 3.5" W x 4.8" H (4028B Series) 8.0" L x 5.2" W x 6.4" H (4028C Series)
Weight	3.3 lbs. (4028A Series) 5.2 lbs. (4028B Series) 7.3 lbs. (4028C Series)

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	0°C to 50°C (32°F to 122°F) (derate accuracy outside $25 \pm 10^\circ\text{C}$)
Storage Temperature	-20°C to 70°C (-4°F to 158°F)
Humidity	95% non-condensing
Altitude	10,000 feet (3,000 m)
General EMC	Designed to carry CE mark
Emissions	EN-55011, 1991, Class B
Immunity	EN-50082-1, 1995
Safety	EN-61010, 1993 in accordance with Council Directives 73/23/EEC and 93/68/EEC
Calibration Cycle	1 year

POWER SENSOR SELECTION GUIDE

4028 SERIES	Power Range	Frequency
4028A250K	1.0 kW-20 kW	250-400 kHz
4028A400K	1.0 kW-20 kW	400-550 kHz
4028A2M	1.0 kW-25 kW	1.5-2.5 MHz
4028A3M	1.0 kW-25 kW	2.5-3.5 MHz
4028A4M	1.0 kW-25 kW	3.5-4.5 MHz
4028A10M	1.0 kW-25 kW	10-15 MHz
4028A25M	1.0 kW-25 kW	25-30 MHz
4028B3M	1.0 kW-25 kW	2.5-4 MHz
4028B10M	1.0 kW-25 kW	10-15 MHz
4028C10M	500 W-50 kW	10-15 MHz

Multifunction Power Meter

4421



- Precision Power Meter for Semiconductor Processing Applications
- $\pm 1\%$ Accuracy when used with the Bird 4027 Series Sensors
- Wide Dynamic Range - The instrument will meet the full accuracy specification over a 35 dB dynamic range
- Excellent Measurement Repeatability - Typically $<0.1\%$
- Digital Display - Along with automatic VSWR calculation
- Computer Interface - RS-232 and IEEE-488 standard

Power Range	100 mW to 50 kW FS
Frequency Range	100 kHz - 1 GHz
VSWR Range	1.0 - 199.9
Functions	Forward and reflected power in W or dBm, VSWR, return loss in dB and min./max. values
Overrange	Audible warning when RF power input exceeds 120% of sensor's maximum power range
Indication Display	3 1/2 digit-liquid crystal display with indicator for mode, measurement units, battery condition, programming status, and trend arrows. Switchable backlight.
Operating Power	115/230 VAC, 50/60 Hz or 8 nickel metal hydride 1.2 V cells (NEDA type 10014)
Nominal Size	12 9/32" L x 12 5/32" W x 4 1/4" H (312 mm x 309 mm x 108 mm) with handle extended 15 7/16" L (392 mm)
Weight	11 lbs. (5 kg.)
Interconnects	1 meter latch-n-lock coiled cable
Interfaces	IEEE-488 and RS-232 standard
Dimensions	4 1/2" x 6 1/2" (114 x 165 mm)
Required Product	RF Power Sensor
Accessories	Case 4300A215 19" Panel Mount Kit 4421-250 Latch & Lock Cable 4421-038
CE	EMC EN 61326-1:2006

Multifunction Power Meter

4422



- Manage multiple sensors simultaneously
- Multiple Displays Functions: Digital, Analog and Strip Chart
- Each Display Window can be Customized for user preference
- Compatible with a wide array of USB enabled Bird Field Sensors
- Data logging capability with playback of saved log files
- Log file in either XML and Comma Delimited formats
- Snapshot Capabilities
- Ideal for use as a stand alone display
- No calibration required.
- Functions: True Average Power (Forward and Reflected), VSWR, Peak power, Crest Factor, CCDF, Burst Power, Peak envelope power, and all IEEE pulse related parametric measurements.

POWER MEASUREMENT

Power Range	Sensor dependent
Frequency Range	Sensor dependent
VSWR Range	1.0 – 199.9 ma
Return Loss Display	0 to 40 dB max
Multiple sensor support	Enable individual windows for each sensor connected.
Connection to sensor	Wired
Data Logging	Yes

GENERAL SPECIFICATIONS

Sensor Detection	Automatic Sensor detection opens appropriate display for each sensor type
Display Type	10.4" TFT LCD (LED back light)
Display Resolution	800 x 600
Display Viewability	Indoor Viewable
Touch Screen	Five wire resistive
Languages	English, Chinese, Spanish
Calibration interval	Not required
Operating System	Windows 7 Embedded

COMPLIANCE

EMC Standard	CE Compliant
Safety Standard	CE Compliant

AC/DC POWER SUPPLY

Input Voltage	12 VDC, supplied from Bird 4421 Power Meter
Power Consumption	25W

PHYSICAL SPECIFICATIONS

Dimensions, nominal	Open: 4 5/8 in. x 13 5/8 in. x 13 in. (371 mm x 346 mm x 330 mm) Stowed: 14 5/8 in. x 3 1/8 in. x 13 in. (371 mm x 79 mm x 330 mm)
Weight, max	11.1 lbs (5035 g)
Clean Room Rating	Class 100 / ISO 5

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	Open Chassis: 0° to 50° C (32° to 122° F) Closed Chassis: 0° to 45° C (32° to 113° F)
Storage Temperature	-20° to 60° C (-4° to 140° F)
Relative Humidity	10 to 95% at 40° C (Non-Condensing)
Altitude, max	15,000 ft (4500 m)
Shock	10 G Peak acceleration (11 ms duration)
Vibration	5 to 500 Hz, 1 G RMS
IP Grade	IP65 (LCD panel only)
Cooling	Fanless/Passive

OPTIONAL ACCESSORIES

Adapter	4421B540-2
Latch & Lock Cable	4421-038

AC Power Cord	5A2976-10-2
---------------------	-------------

Calibration Cart

SCC7 Series



- Turnkey RF Measurements
- Designed for easy transportation and effortless use
- Suitable for use in a clean room environment
- Stainless Steel Mobile Cart with Locking Wheels
- Available in International and Domestic Versions
- High Return Loss Ensures Minimal Power Measurement Error Contribution
- Frequency and Power Upgrades Available (Contact factory for more details)
- Service Plans Available with Bird® Service Center

Power Levels	1, 2.5, 5, 10 kW
Meter	4421
Sensor Options	4020 Series, 4027A Series or 4027F Series
Load Options	8251, 8890-300, 8921, 8931-115, 8931-230
Impedance	50 ohm
Frequency Range 4020 Sensor	100 kHz - 1000 MHz
Frequency Range 4027A Sensor	250 kHz - 65 MHz
Frequency Range 4027F Sensor	1.8 MHz - 65 MHz
Accuracy 4020 Series	±3% (1s) across power and frequency range
Accuracy 4027A Series	±1% (1s) at calibration frequency and power levels; ±2% (1s) over remainder of power range, and at other than calibration frequencies
Accuracy 4027F Series	±1% (2s) across power and frequency range; ±2% (2s) over remainder

Casters	4 locking swivel
Connector Type	*Customer Specified
Operating Position	Vertical only
Power Requirements	115/230 VAC, ±10%, 50/60 Hz
Ambient Temp Range	0°C to 45°C (For 10 kW 0°C to +40°C)
Storage Temperature	-20°C to +70°C
Humidity	85% Max., Non condensing
Altitude	Load derated above 5,000 feet
5 kW & 10 kW Size/Weight	52" L x 20" W x 42" H / 250 lbs. Fully assembled
1 kW & 2.5 kW Size/Weight	42" L x 20" W x 42" H / 175 lbs. Fully assembled
Material of Construction	Stainless steel cart
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001

*For connector options, please refer to our catalog or contact sales at 866.695.4569 or sales@bird-technologies.com

POWER SENSOR SELECTION GUIDE

4020 SERIES	Frequency Range	Power Input
4021	1.8-32 MHz	300 mW to 1 kW (1.2 kW max.)
4022	25-1000 MHz	300 mW to 1 kW (1.2 kW max.)
4024	1.5-32 MHz	3 W to 10 kW (12 kW max.)
4025	100-2500 kHz	3 W to 10 kW (12 kW max.)
4027A SERIES	Frequency Range	Power Input
4027A250K	250-400 kHz	3 W to 10 kW
4027A400K	400-550 kHz	3 W to 10 kW
4027A800K	800-950 kHz	3 W to 10 kW
4027A2M	1.5-2.5 MHz	3 W to 10 kW
4027A4M	3-5 MHz	3 W to 10 kW
4027A10M	10-15 MHz	3 W to 10 kW
4027A12M	10-15 MHz	300 mW to 1kW
4027A25M	25-30 MHz	3 W to 9 kW
4027A35M	35-45 MHz	3 W to 7.5 kW
4027A60M	45-65 MHz	3 W to 6 kW
4027A100M	95-105 MHz	3 W to 4 kW
4027A150M	150-170 MHz	3.75 W to 3.75 kW
4027F SERIES	Frequency Range	Power Input
4027F2M	1.8-2.2 MHz	100 W to 10 kW
4027F10M	12-15 MHz	100 W to 10 kW

LOADS GUIDE

HIGH POWER	Frequency Range & VSWR	Power Rating
8251	DC to 1 GHz at 1.1 max.	1000 W continuous
8890-300	DC to 1 GHz at 1.1 max. 1 GHz to 2 GHz at 1.25 max. 2 GHz to 2.4 GHz at 1.3 max.	2500 W continuous
8921	DC to 1 GHz at 1.1 max.	5000 W continuous
8931-115	DC to 400 MHz at 1.15 max. 400 MHz to 1 GHz at 1.20 max.	10 kW continuous w/ blower on 2.5 kW continuous w/ blower off
8931-230		
ULTRA-STABLE	Frequency Range & VSWR	Power Rating
8890-300SC13	DC to 28 MHz at 1.1 max. (VSWR less than 1.05:1)	2.5 kW
8921SC13	DC to 28 MHz at 1.1 max. (VSWR less than 1.05:1)	5 kW
8931-115SC13	DC to 28 MHz at 1.1 max. (VSWR less than 1.05:1)	10 kW, 115 Volt
8931-230SC13	DC to 28 MHz at 1.1 max. (VSWR less than 1.05:1)	10 kW, 230 Volt

Multi-Sensor Calibration Cart

MSCC7 Series



- Turnkey RF measurements
- Designed for easy transportation and effortless use
- Integrates two switchable precision power sensors
- Suitable for use in a clean room environment
- Stainless steel mobile cart with locking wheels
- Available in International and Domestic versions
- Frequency and power upgrades available (Contact factory for more details)
- Service plans available with Bird® Service Center

Power Levels	5 kW or 10 kW for either sensor
Meter	4421
Sensor Options	4020, 4027A, or 4027F Series
Load Options	8921A100, 8931A400-115, 8931A400-230
Impedance	50 ohm
Frequency Range	100 kHz - 30 MHz (depending on sensor)
Accuracy 4020 Series	±3% (1s)
Accuracy 4027A Series	±1% (1s)
Accuracy 4027F Series	±1% (2s)
Casters	4 locking swivel

Connector Type	*Customer Specified
Operating Position	Vertical only
Power Requirements	115/230 VAC, ±10%, 50/60 Hz
Ambient Temp Range	0°C to 35°C (For 10 kW 0°C to +40°C)
Storage Temperature	-20°C to +70°C
Humidity	85% Max., Non condensing
Altitude	Load derated above 5,000 feet
5 kW & 10 kW Size/Weight	52" L x 20" W x 42" H /290 lbs. Fully assembled
Material of Construction	Stainless steel cart
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001

*For connector options, please refer to our catalog or contact sales at 866.695.4569 or sales@bird-technologies.com

POWER SENSOR SELECTION GUIDE

4020 SERIES	Frequency Range	Power Input
4021	1.8-32 MHz	300 mW to 1 kW (1.2 kW max.)
4024	1.5-32 MHz	3 W to 10 kW (12 kW max.)
4025	100-2500 kHz	3 W to 10 kW (12 kW max.)
4027A SERIES	Frequency Range	Power Input
4027A250K	250-400 kHz	3 W to 10 kW
4027A400K	400-550 kHz	3 W to 10 kW
4027A800K	800-950 kHz	3 W to 10 kW
4027A2M	1.5-2.5 MHz	3 W to 10 kW
4027A4M	3-5 MHz	3 W to 10 kW
4027A10M	10-15 MHz	3 W to 10 kW
4027A12M	10-15 MHz	300 mW to 1kW
4027A25M	25-30 MHz	3 W to 9 kW
4027F SERIES	Frequency Range	Power Input
4027F2M	1.8-2.2 MHz	100 W to 10 kW
4027F10M	12-15 MHz	100 W to 10 kW

LOADS FOR SEMICONDUCTOR GUIDE

High Power	Frequency Range & VSWR	Power Rating
8921A100	DC to 30 MHz at 1.1 max. (less than 1.05 typical)	5 kW
8931A400-115		10 kW
8931A400-230		10 kW

High Power Calibration Cart

SCC8 Series



- Capable of measuring and terminating 25kW of RF power
- Designed for easy transportation and effortless use
- Suitable for use in a clean room environment
- High return loss ensures minimal power measurement error contribution
- Available in International and Domestic versions
- Frequency and power upgrades available (Contact factory for more details)
- Service plans available with Bird® Service Center

Frequency Range	250 kHz - 30 MHz, depending on sensor (see chart)
Power Range	1 kW - 25 kW
Accuracy	±2% of reading at calibration frequency and power levels, ±3% of reading at other power levels and frequencies within sensor range.
Connector	Customer specified, appropriate for power level.
Impedance	50 ohm nominal
Sensor VSWR	1.05 max. (32.2 dB return loss)
Load VSWR	1.1 max. (26.4 dB return loss)
Coolant	100% water or 35% industrial ethylene glycol/65% water, 9 quarts (8.5 liters), forced air cooling
Particle Generation	156 per cfm (0.5 µm), 29 per cfm (1 µm), 0 per cfm (3 µm)

Power Requirements	115/230 VAC, ±10%, 50/60 Hz
Humidity	85% maximum, non-condensing
Altitude	Load derated above 5000 feet
Operating Temperature	+5°C to +30°C, < 25 kW, 100% water, +5°C to +45°C, < 20 kW, 100% water, 0°C to +25°C, < 25 kW, 35% ethylene glycol/65% water, 0°C to +35°C, < 20 kW, 35% ethylene glycol/65% water
Storage Temperature	+5°C to +50°C, 100% water, -20°C to +50°C, 35% ethylene glycol/65% water
Size	39.5" L x 21.5" W x 39.5" H (1003.3mm x 546.1mm x 876.3mm)
Weight	240 lbs (109 kg)
Material of Construction	Stainless steel cart
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001

*For connector options, please refer to our catalog or contact sales at 866.695.4569 or sales@bird-technologies.com

POWER SENSOR SELECTION GUIDE

4028 SERIES	Frequency Range	Power Range
4028A10M	10-15 MHz	1kW-25kW
4028A250K	250-400 kHz	1kW-20kW
4028A25M	25-30 MHz	1kW-25kW
4028A2M	1.5-2.5 MHz	1kW-25kW
4028A3M	2.5-3.5 MHz	1kW-25kW
4028A400K	400-550 kHz	1kW-20kW
4028A4M	3.5-4.5 MHz	1kW-25kW
4028B10M	10-15 MHz	1kW-25kW
4028B3M	3-4 MHz	1kW-25kW

BDS™ Calibration Cart

- Designed for easy transportation and effortless use
- Turnkey RF measurements
- High return loss ensures minimal power measurement error contribution
- Available in International and Domestic versions
- Service plans available with Bird® Service Center



Frequency Range	400 kHz to 100 MHz
Frequency Resolution	100 Hz
Frequency Accuracy	± 1 kHz
Power Accuracy	± 2% at 400 kHz, 2 MHz, 13.56 MHz, 27.12 MHz, 60 MHz ± 4% at all other frequencies
Update Rates	60 Hz typical
RF Power, Max.	10 kW or maximum power limit of RF connector
RF Connector	7/16 DIN (f)
Operating Temperature	+20 to +40°C (68 to 104°F)
Storage Temperature	-20 to +80°C (-4 to +176°F)
Cable Operating Temperature	0 to +100°C (32 to 212°F)

Humidity, Max.	85% Non-condensing
Impedance	50 Ohm
Casters	4 locking swivel
Operating Position	Vertical Only
Power Requirements	115/230 VAC, ± 10%, 50/60 Hz
Altitude	Load derated above 5,000 feet
5 kW & 10 kW Size/Weight	52" L x 20" W x 44" H / 250 lbs. Fully assembled
Material of Construction	Stainless steel cart
Application Standards	CE

POWER SENSOR SELECTION GUIDE

Model	Frequency Range & VSWR	Power Input
8921SC13		5 W
8931-115SC13	DC to 28 MHz at 1.1 max. (VSWR less than 1.05:1)	10 kW
8931-230SC13		10 kW

HIGH POWER LOADS

Model	Frequency Range & VSWR	Power Input
8921	DC to 1 GHz at 1.1 max.	5000 W continuous
8931-115	DC to 400 MHz at 1.15 max. 400 MHz to 1 GHz at 1.20 max.	10 kW continuous w/ blower on
		2.5 kW continuous w/ blower off
8931-230	DC to 400 MHz at 1.15 max. 400 MHz to 1 GHz at 1.20 max.	10 kW continuous w/ blower on
		2.5 kW continuous w/ blower off

Digital Power Meter

DPM Series



- Rugged field meter tested to military standards
- Works with all Bird field sensors
- Up to 60 hours of continuous battery life
- Automatically detects sensor and displays appropriate screen
- Data logging capable with up to 7 days of onboard memory

MODEL 5000-XT

Display	Indoor/Outdoor Viewable Monochrome VGA Display with Backlight
Functions	VSWR, Peak Power, True Average Power, Crest Factor CCDF, Burst Power, Data Logging
Sensor Detection	Automatic
Battery	Rechargeable, Field Replaceable, Lithium Ion Batteries
AC Adapter/Charger	115/230 VAC, 50/60 Hz
Battery Life	20 Hours Continuous Usage with WPS Series Sensors 60 Hours Continuous Usage with All Other Sensors
Calibration Interval	No calibration required
Languages	English, Mandarin, Spanish
Dimensions	6.6" H x 4.0" W x 1.95" D (168 mm x 102 mm x 50 mm)
Sensor Interface	DB9, USB 2.0 SeaLatch Type A
PC Interface	USB 2.0 SeaLatch Type B
Weight w/ Battery	1.4 lbs.
Operating Temp.	0°C to +50°C
Storage Temp.	-20°C to +50°C
Environmental	MIL-PRF-28800F, Class 2*
International Certs.	CE, RoHS
CE	EMC EN 61326-1:2006
Compatible Devices	All Bird Field Sensors

*contact Bird Applications Engineering for specific tests conducted

STANDARD ACCESSORIES

Battery, Installed	5A5001-1	DB9 Cable, 10'	5A2264-09-MF-10
Power Supply, Includes Brick, cord, 3 Intl Adaptors	5A5002-1	Operations Manual , Multilanguage	920-5000-XT
Cigarette adaptor	5A2238-4	Soft Case	5A5000-1
USB SeaLatch Cable, 6'	5A2653-6L2		

Power Sensor

7020 Series

- Economical, broad band sensor
- Modulation independent measurements
- Inline device - no directional coupler required
- Every unit ships with a free Virtual Power Meter
- NIST traceable calibration



**Works with the
Bird RF Meter App!**

Free download from Google Play Store

Frequency Range	Low Frequency Version: 25 MHz - 1.0 GHz Standard Frequency Version: 350 MHz - 4.0 GHz
Power Range	Low Frequency Version: 0.5 W - 500 W Standard Frequency Version: 0.15 W - 150 W
Accuracy	+/- (4% of reading + 0.05 W) (above 35 °C or below 15 °C add 3%)
Min. Forward Power for Reflected Measurement	5.0 W
Peak/Average Ratio, Max	12 dB
Insertion Loss, Max	0.1 dB
Insertion VSWR	1.10 max
Impedance, Nominal	50 ohms
Response Time	3 seconds
VSWR Range	1.15 to 99.9
RF Connector	From host instrument via cable
Directivity, Min:	28 dB
Recommended Calibration Interval	Annually
Compatible Devices	SA-3600XT, SA-6000XT, 5000-XT, VPM3

POWER SUPPLY

Source	5Vdc from USB host
Current Draw	35 mA

INTERFACE

Protocol	USB 2.0
Connector	USB Type 'B' with SeaLatch locking USB connector
Data Logging	with VPM3 Software

STANDARDS COMPLIANCE

CE	EMC EN 61326-1:2006
RoHS	Compliant
Upgradability	Firmware field-upgradable via the USB port

MECHANICAL SPECIFICATIONS

Dimensions, Nominal	4.8" x 2.2" x 1.3" (122mm x 54mm x 32mm)
Weight, nominal	0.8 lbs (0.36 kg)
Environmental	MIL-PRF-28800F Class 3
Operating Temperature	-10 to +50 °C (+14 to +122 °F)
Storage Temperature	-40°C to 80°C (-40°F to 176°F)
Humidity, Max	95% maximum (non-condensing)
Altitude, Max	4,572 m (15,000ft)



STANDARD ACCESSORIES

SeaLatch USB Cable, 6'	5A2653-6L2
Virtual Power Meter	VPM3

Instruction Manual (Sensor)	920-7020S
Instruction Manual (VPM3)	920-VPM3

Wideband Power Sensor

WPS Series



- Measures True Average Power, Peak Power, and Duty Cycle directly with exceptional accuracy
- Calculates VSWR, Return Loss, Reflection Coefficient, Crest Factor, Average Burst Power, and CCDF
- Works with any Modulation scheme
- Compatible with all digital mobile radio platforms
- Compatible with all analog, digital, and multi-carrier signals
- Sensor plugs and plays with 5000-XT meter
- Virtual Power Meter software is also included for free
- No field calibration required
- NIST traceable calibration



**Works with the
Bird RF Meter App!**
Free download from Google Play Store

Connectors	N Female (Both)
Power Supply	USB Port: Less than one low-power, USB load DC Input Connector: 7-18 VDC at less than 0.1A
Impedance	50 Ohms (nominal)
Weight	1.2 lb. maximum
Dimensions HxWxD [inches (mm)]	4.8" x 4.6" x 1.3" (122 mm x 117 mm x 33 mm)
Operating Temps [°C(°F)]	-10° to +50°C (+14° to +122°F)
Storage Temps [°C(°F)]	-40° to +80°C (-40° to +176°F)
Mechanical Shock & Vibration	IAQ MIL-PRF-28800F Class 3
CE	EMC EN 61326-1:2006
Data Logging	Requires 5000-XT or VPM3
Compatible Devices	5000-EX, 5000-XT, VPM2, VPM3, SA-1700 EXP*, SA-2500 EX*, SA-6000 EX*, SA-3600 XT, SA-6000 XT, SH-36S, SH-361S, SH-362, SH-362S <small>*Models 5018D and 5019D are not compatible with SA-1700 EXP, SA-2500 EX and SA-6000 EX</small>

INTERFACES

DPM	DB9 proprietary interface
PC Interface (1)	RS -232, 9600 Baud, no parity, 8 data bits, 1 stop bit, DB9
PC Interface (2)	USB 2.0 Type B

STANDARD ACCESSORIES

USB Cable 10'	5A2653-10	Instruction Book	920-5012S
Virtual Power Meter	VPM3	Instruction Book	920-VPM3

OPTIONAL ACCESSORIES

Power Supply, Intl	5A2226	DB9 Cable, 10"	5A2264-09-MF-10
Power Supply, US	5A2229		

Wideband Power Sensor

WPS Series

	5012D	5016D	5017D	5018D	5019D
Frequency Range	350 MHz - 4.0 GHz	350 MHz - 4.0 GHz	25 MHz - 1.0 GHz	150 MHz - 4.0 GHz	25 MHz - 1.0 GHz
Power Range	150 mW - 150 W Avg. 400 W Peak	25 mW - 25 W Avg. 60 W Peak	500 mW - 500 W Avg. 1300 W Peak	100 mW - 25 W Avg 60 W Peak	100 mW - 100 W .260 W Peak
Insertion VSWR	<1.05 from 0.35 to 2.5 GHz, <1.10 from 2.5 to 4 GHz	<1.05 from 0.35 to 2.5 GHz, <1.10 from 2.5 to 4 GHz	<1.05	<1.05 from 0.35 to 2.5 GHz, <1.10 from 2.5 to 4 GHz	<1.05
Insertion Loss	<0.05 dB from 0.35 to 1.0 GHz <0.1 dB from 1 to 4 GHz	<0.05 dB from 0.35 to 1.0 GHz <0.1 dB from 1 to 4 GHz	<0.05 dB	<0.05 dB from 0.35 to 1.0 GHz <0.1 dB from 1 to 4 GHz	<0.05 dB
Directivity	30dB up to 3.0 GHz, 28dB up to 4.0 GHz	30dB up to 3.0 GHz, 28dB up to 4.0 GHz	28dB up to 100 MHz, 30dB from 100-1000 MHz	30dB up to 3.0 GHz, 28dB up to 4.0 GHz	28dB up to 100 MHz, 30dB from 100-1000 MHz
Average Power					
Average Forward Power Range	150 mW - 150 W Avg, 400 W Peak	25 mW - 25 W Avg, 60 W Peak	500 mW - 500 W Avg, 1300 W Peak	100 mW - 25 W Avg, 60 W Peak	100 mW - 100 W, 260 W Peak
*Accuracy, Average Forward Power	± 4% of reading, + 0.05 W	± 4% of reading, + 0.008 W	± 4% of reading, + 0.17 W	± 4% of reading, + 0.008 W	± 4% of reading, + 0.04 W
Minimum Forward Power for Reflected Measurement	0.5 W	0.1 W	0.5 W	0.1 W	0.3 W
Return Loss	0.0 to 23 dB				
VSWR	1.15 to 99.9				
Burst Average Power					
Burst Average Power Range	4 W - 150 W Avg	.7 W - 25 W Avg	13.5 W - 500 W Avg	.7 W - 25 W Avg	2.7 W - 100 W Avg
Burst Width	1 µs to 5 ms				
Repetition Rate	5 Hz, Min				
Duty Cycle (D)	.002 to 1.0				
*Accuracy, Burst Average Power	± 6% of reading, + 0.05 W	± 6% of reading, + 0.008 W	± 6% of reading, + 0.17 W	± 6% of reading, + 0.008 W	± 6% of reading, + 0.04 W
Peak Envelope Power					
Peak Envelope Power Range	4.0 - 400 W	0.7 - 60 W	13.5 - 1300 W	0.7 - 60 W	2.7 - 260 W
*Peak Envelope Power Accuracy					
Burst Width > 200 µs	± 7% of reading, + 0.20 W	± 7% of reading, + 0.05 W	± 7% of reading, + 0.70 W	± 7% of reading, + 0.05 W	± 7% of reading, + 0.13 W
1 µs < Burst Width < 200 µs	± 10% of reading, + 0.40 W	± 10% of reading, + 0.10 W	± 10% of reading, + 1.40 W	± 10% of reading, + 0.10 W	± 10% of reading, + 0.26 W
0.5 µs < Burst Width < 1 µs	± 15% of reading, + 0.40 W	± 15% of reading, + 0.10 W	± 15% of reading, + 1.40 W	± 15% of reading, + 0.10 W	± 15% of reading, + 0.26 W
Burst Width < 0.5 µs	± 20% of reading, + 0.40 W	± 20% of reading, + 0.10 W	± 20% of reading, + 1.40 W	± 20% of reading, + 0.10 W	± 20% of reading, + 0.26 W
Crest Factor					
Crest Factor Measurement Range	150 mW - 150 W	25 mW - 25 W	500 mW - 25 W	25 mW - 25 W	100 mW - 100 W
*Accuracy, Crest Factor	Linear Sum of Peak and Average Power Accuracies				
Complementary Cumulative Distribution Function (CCDF)					
CCDF Measurement Range	0.1 to 100%				
Threshold Measurement Range	4.0 - 400 W	0.7 - 25 W	13.5 - 500 W	0.7 - 25 W	2.7 - 100 W
Measurement Uncertainty	± 0.2%				
Threshold Measurement Range	As Peak Envelope Power Accuracy + 2.0%				

* for temperatures above 35°C or below 15°C add 3.0% to stated accuracies

Statistical Power Sensor

7022 Series



Works with the Bird RF Meter App!
Free download from Google Play Store

- Can be used with all known communication formats
- Detailed breakdown of a single or multiple pulses
- Includes a wide range of IEEE pulse parameters
- Analytical results of Signal of Interest using CCDF parameters
- Isolate and identify specific breakpoints with the use of markers
- True Average measurement of Forward and Reflected power
- Peak and Burst Power measurements

Measurement Type	Thru-Line Power
Frequency Range	350 MHz to 6 GHz
Frequency Measurement Accuracy	± 3% of reading with CW signals
Power Measurement Range	0.025 W to 500 W average, Average Power Rating limited by Chart below
Dynamic Range	33 dB
Peak to Average Ratio	12 dB, absolute peak power limited to 1500 W
Impedance, Nominal	50 Ohms
Insertion Loss, Max	0.05 dB
Insertion VSWR, Max	1.065 350-2500 MHz, 1.12, 2500-6000 MHz
Dynamic Range	66 dB, intermod-free
Directivity, Min	<-30 dB, 350-1000 MHz, <-28 dB, 1000-6000 MHz
Factory Calibration	NIST Traceable
Field Calibration	No Field Calibration Required
Data Logging	Yes, with the VPM3 software
Interface	USB 2.0 Type B (USBTMC)
Power Supply	USB Port


Sample Rate	44 M Samples/s Max
Time Resolution	50nSec to 10 Sec
Time Base Accuracy	.01%
Display Refresh Rate	10 times/ sec (Limited by communication)
Video Bandwidth	Settable: 20 MHz (none), 5 MHz, 400 kHz, 4.5 kHz
Points per screen	1001
Trigger input connector	BNC female (1MΩ Impedance; 3V High, 1.2V Low)
Operating Temperature	-10 to +50 °C (+14 to +122 °F)
Storage Temperature	-40 to +80 °C (-40 to +176 °F)
Humidity, Max	95% maximum (non-condensing)
Altitude, Max	15,000 ft. (4,500 m)
Dimensions, Nominal	5.8" x 4.8" x 1.3" (147 mm x 122 mm x 33 mm)
Weight, Max	1.5 lbs.
Mechanical Shock & Vibration	IAW MIL-PRF-28800F class 3
Certifications	EMC Directive (2004/108/EC) European Standard: EN 61326— Electrical Equipment for measurement, control and laboratory use; EMC Requirements

Test Spec (for radiated immunity):
EN 61000-4-3—Testing and measurement techniques - 10V/meter

CE Mark

RoHS

MAXIMUM POWER

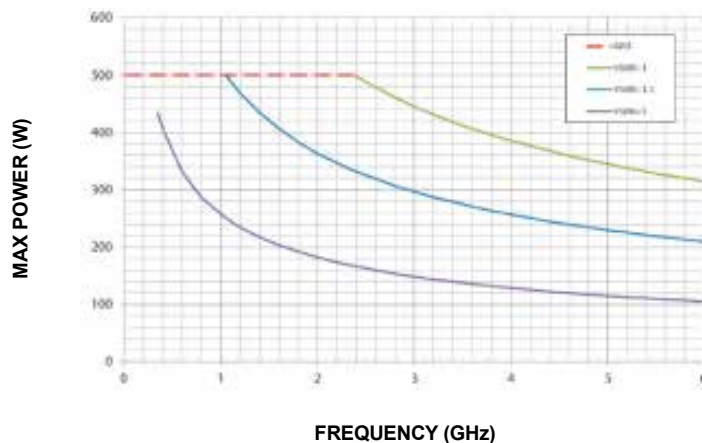

Statistical Power Sensor

7022 Series

STATISTICAL MODE

Peak-to-Average Ratio (Horizontal Axis)	0 to 16 dB
Percent Time Above Average Power (Vertical Axis)	.0001 to 100% (log display)
Number of samples*	268 M samples max
Elapsed Time*	6.5 Seconds max
Confidence Band*	85-99.99 adjustable
Modes on full buffer	Re-start Stop

**Number of samples, Elapsed Time and Confidence Band are all related, if one is set the other two parameters are calculated.

AVERAGE MODE

Average Forward Power Range	0.25 W to 500 W
Average Forward Power Accuracy	4% of Reading \pm 16 mW +3% outside 15-35°C
Average Reflected Power Range	0.025 W to 50 W
Average Reflected Power Accuracy	4% of Reading \pm 1.6 mW +3% outside 15-35°C
Return Loss	0 to 23 dB
VSWR	1.15 to 99.9
Rho	0.07 to 1.0

TIME DOMAIN MODE MEASUREMENT

Peak Envelope Power Accuracy (up to 500 W)	\pm 5% +3.75% outside 15-35°C
Peak Envelope Power	up to 500 W
Peak Envelope Power Accuracy (500 W to 1500 W)	\pm 11% +3.75% outside 15-35°C
Burst Average Power Accuracy (0.25 W to 2 W)	\pm 7% +3.75% outside 15-35°C
Burst Average Power Accuracy (2 W to 500 W)	\pm 5% +3.75% outside 15-35°C
Burst Average Power Accuracy (500 W to 1500 W)	\pm 11% +3.75% outside 15-35°C
Pulse Measurements	All IEEE Std 194 Pulse Parameters Pulse Off Time Pulse Width Pulse fall-time Pulse repetition frequency Pulse rise time Pulse period Pulse duty cycle Peak power Pulse overshoot
Triggers	Auto Free Run Marker Based (Video Trigger) External Trigger Hold Off

STANDARD ACCESSORIES

USB SeaLatch™ Cable 5A2653-6L2
 Virtual Power Meter VPM3
 Manual for Statistical Power Sensor 920-7022

Manual for Virtual Power Meter 920-VPM3
 BNC / BNC Trigger Cable 5A2918-11-6



Directional Power Sensors

DPS Series



- Can measure True Average Power or Peak Power
- Available with a wide range of Bird Elements
- Every unit ships with a free Virtual Power Meter
- No field calibration required
- NIST traceable calibration



Works with the Bird RF Meter App!

Free download from Google Play Store

	5010B	5014
Frequency Range	Element dependent, 2 MHz to 2.7 GHz	
Power Range	Element dependent, 500 mW to 1 kW full scale	
Impedance	50 Ohm	
Peak/Average Ratio	10 dB maximum with DPM elements	
Accuracy	True Average Power, ±5% of reading (15°C to 35°C), ±7% of reading (-10°C to 50°C) PEAK POWER, ±8% of full scale	
Insertion VSWR	1.05:1 from 0.45 to 1000 MHz (with N connectors)	
Settling Time	< 2 seconds	
Connectors	QC Type. Female N normally supplied.	
Power Supply	From host instrument via cable	
Interface	DB9 (proprietary configuration)	USB 2.0 (Type B)
Dimensions	1.875" H x 1.875" W x 3.5" D 47.7 mm x 47.7 mm x 88.9 mm excluding connectors	
Weight	1.12 lbs. (0.51 kg)	
Directivity	30 dB typical (exact value depends on element selected)	
Humidity	95% max. (non-condensing)	
Pulse Width	>100 MHz	800 ns min.
Parameters	26-99 MHz 2-25 MHz	1.5 µs min. 15 µs min.
Pulse Rep. Rate Peak	15 pps min.	
Pulse Duty Factor	1 x 10 ⁻⁴ min.	
Dynamic Range	16 dB	
Operating Temp.	-10°C to +50°C	
Storage Temp.	-40°C to +75°C	
Environmental	MIL PRM-2880F Class 2	
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001	
Compatible Devices	SH-36S, SH-361S, SH-362, SH-362S, 5000-XT	SA-3600XT, SA-6000XT, 5000-XT, VPM3, Bird RF Meter App

AVERAGE POWER ELEMENT SELECTION GUIDE*

Frequency Range (MHz)	Forward Power Range	Reflected Power Range	Forward Element	Reflected Element
2 - 30	1.25 W to 50 W 12.5 W to 500 W	125 mW to 5 W 1.25 W to 50 W	DPM-50H DPM-500H	DPM-5H DPM-50H
25 - 60	1.25 W to 50 W 12.5 W to 500 W	125 mW to 5 W 1.25 W to 50 W	DPM-50A DPM-500A	DPM-5A DPM-50A
50 - 125	1.25 W to 50 W 12.5 W to 500 W 25 W to 1 kW	125 mW to 5 W 1.25 W to 50 W 2.5 W to 100 W	DPM-50B DPM-500B DPM-1000B	DPM-5B DPM-50B DPM-100B
100 - 250	1.25 W to 50 W 12.5 W to 500 W 62.5 W to 2.5 kW	125 mW to 5 W 1.25 W to 50 W 6.25 W to 250 W	DPM-50C DPM-500C DPM-2500C	DPM-5C DPM-50C DPM-250C
200 - 500	125 mW to 5 W 1.25 W to 50 W 12.5 W to 500 W	12.5 mW to 500 mW 125 mW to 5 W 1.25 W to 50 W	DPM-5D DPM-50D DPM-500D	DPM-5D DPM-50D DPM-50D
400 - 800	125 mW to 5 W 1.25 W to 50 W 2.5 W to 100 W 12.5 W to 500 W 25 W to 1 kW	12.5 mW to 500 mW 125 mW to 5 W 250 mW to 10 W 1.25 W to 50 W 2.5 W to 100 W	DPM-5E-400 DPM-50E-400 DPM-100E-400 DPM-500E-400 DPM-1000E-400	DPM-5E-400 DPM-5E-400 DPM-10E-400 DPM-50E-400 DPM-100E-400
800 - 960	125 mW to 5 W 1.25 W to 50 W 2.5 W to 100 W 12.5 W to 500 W 25 W to 1 kW	12.5 mW to 500 mW 125 mW to 5 W 250 mW to 10 W 1.25 W to 50 W 2.5 W to 100 W	DPM-5E-800 DPM-50E-800 DPM-100E-800 DPM-500E-800 DPM-1000E-800	DPM-5E-800 DPM-5E-800 DPM-10E-800 DPM-50E-800 DPM-100E-800

* Note: For Peak Power Readings, use elements from Tables 1-6 on pages 46-47

Antenna & Cable Monitor

ACM Series



**Works with the
Bird RF Meter App!**
Free download from Google Play Store

- Accurately monitors your antenna and cable system VSWR levels
- Also provides accurate in-line power measurement functionality
- Provides alarms if an antenna or cable failure should occur
- Monitors transmitter output power and includes low and high power alarms
- Measures true average power of signals with high peak-to-average characteristics - works with any modulation!
- Included as standard Push-To-Talk (PTT) input to avoid false alarm triggering when the transmitter (radio) is not keyed

FORWARD POWER MEASUREMENT

Frequency Range*	136 - 225 MHz 225 - 520 MHz 470 - 960 MHz 960 - 2400 MHz
<small>*Other frequencies & power ranges available - contact factory.</small>	
Measurement Range	ACM: 2.5 W to 100 W ACM 500: 12.5 W to 500 W
Power Accuracy	136 - 225 MHz, $\pm 10\%$ 225 - 520 MHz, $\pm 8\%$ 470 - 960 MHz, $\pm 5\%$ 960 - 2400 MHz, $\pm 5\%$
Insertion Loss	0.1 dB, 136 - 960 MHz 0.15 dB, 960 - 2400 MHz
VSWR	1.07, 136 - 960 MHz 1.1, 960 - 2400 MHz, N Connectors 1.1, 960 - 2000 MHz, 7/16 Connectors 1.2, 2000 - 2400 MHz, 7/16 Connectors

VSWR ALARM CHARACTERISTICS

Alarm Set Point	1.3, 1.4, 1.5, 1.6, 1.7, 1.8 to 1
Relay Contact Type	Dry, Form C, relay contacts, common, normally open, normally closed.
Contact Rating	100 VDC @ 0.5 A
Visual Alarm	Red LED will illuminate to indicate alarm
Stimulus	VSWR set point exceeded, response time proportional to overload.
Reset	Local Mechanical reset switch. Remote input (Reset if VDC is 0 to +0.8 volts).
Monitor Port Connectors	Female N, TNC or BNC
Coupling	-63 dB approx., Subject to changes in full-scale power
Interface Port Connector	Female DB-9, compatible with IBM PC AT serial port.

REFLECTED POWER MEASUREMENT

Directivity	30 dB, 136 - 960 MHz 26 dB, 960 - 2400 MHz
--------------------	---

PHYSICAL AND ENVIRONMENTAL SPECIFICATIONS

General	ThruLine® sensor for direct insertion in 50-ohm line
RF Connectors	N or 7/16 DIN
Max Line Section Power	Dependent on frequency and connector
Alarm/Power Connector	15-pin female "D" connector
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 80°C
Humidity	0 to 95% maximum (non-condensing)
Altitude	Up to 3000 meters above sea level
Passive Intermodulation Products	Less than -130 dBc
Power Requirements	+11 to +26 VDC or ± 36 to ± 72 VDC
Dimensions	4.75" (121 mm) wide (7.55" (192 mm) with connectors) 4.2" (107 mm) high, 1.06" (27 mm) deep
Weight	less than 2 lbs. (0.9 kg)
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001

INTERFACE SPECIFICATIONS

ACM: RS-232 Serial Port	9600 baud, no parity, 8 data bits, 1 stop bit, no handshake
ACMI: Ethernet Port	10/100-BASE-T (auto-sensing)
Compatibility	Ethernet Version 2.0 / IEEE 802.3
Protocols	ARP, UDP/IP, DHCP, BOOTP, Auto IP, HTTP, and SNMP
Left LED	Amber: 10 Mbps, Green: 100 Mbps
Right LED	Amber: Half-duplex, Green: Full-duplex
Security	128-bit encryption

ACM (SERIAL) PART NUMBER DEFINITION

MODEL (POWER RANGE)	FREQ. RANGE (MHz)	RF INPUT CONN	RF OUTPUT CONN.	MONITOR PORT CONN.	INPUT VOLTAGE
ACM = 2.5 - 100 W ACM 500 = 12.5 - 500 W	L1 = 136 - 225 MHz L2 = 225 - 520 MHz M = 470 - 960 MHz *H = 960 - 2400 MHz	NM = N Male NF = N Female DM = 7/16 DIN Male DF = 7/16 DIN Female	NM = N Male NF = N Female DM = 7/16 DIN Male DF = 7/16 DIN Female	N = N Female T = TNC Female B = BNC Female	L = \pm (11 to 26) VDC H = \pm (36 to 72) VDC

ACMI (ETHERNET) PART NUMBER DEFINITION

MODEL (POWER RANGE)	FREQ. RANGE (MHz)	RF INPUT CONN	RF OUTPUT CONN.	MONITOR PORT CONN.	INPUT VOLTAGE
ACMI = 2.5 - 100 W ACMI 500 = 12.5 - 500 W	L1 = 136 - 225 MHz L2 = 225 - 520 MHz M = 470 - 960 MHz *H = 960 - 2400 MHz	NM = N Male NF = N Female DM = 7/16 DIN Male DF = 7/16 DIN Female	NM = N Male NF = N Female DM = 7/16 DIN Male DF = 7/16 DIN Female	N = N Female T = TNC Female B = BNC Female	L = \pm (8 to 18) VDC M = \pm (18 to 36) VDC H = \pm (36 to 72) VDC

*H frequency band unavailable with 500W version

Broadcast Power Monitor

BPME Series



Works with the
Bird RF Meter App!
Free download from Google Play Store

- Continuously monitor key system measurements
- ±5% of reading accuracy for power
- Operates in digital, analog and multi-carrier systems
- Hard Contact alarms
- Remote access with IP Enabled Ethernet connectivity

BPME

Frequency Range*	See chart below
Forward/Reflected Power Range*	See chart below
Measurement Type	In-line, True Average Power
Peak/Average Ratio	10 dB
Coupler Directivity	26 dB minimum, 30 dB typical
Accuracy	±5% of reading
Dynamic Power Range	20 dB
Alarms	VSWR, No/Low Forward Power High Forward Power
Outputs	SPDT relay contact
Display Options	BPME PC Software, 3129
Remote Interface	Ethernet 10BASE-T or 100BASE-TX (auto-sensing); Ethernet Version 2.0/IEEE 802.3 Protocols: ARP, UDP/IP, TCP/IP, Telnet, ICMP, SNMP, DHCP, BOOTP, TFTP, Auto IP, and HTTP Security: 256-bit encryption; Serial RS-232, 9600 baud, no parity, 8 data bits, 1 stop bit, no handshake
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001
Operating Temperature	0°C to +50°C (32°F to 122°F)
Storage Temperature	-20°C to + 80°C (-4°F to 176°F)
Humidity	95% ±5% max. (noncondensing)
Altitude	up to 10,000 feet (3,048 m)
Calibration Cycle	Annual


* Frequency and power level depend on line section, sensor element, and selected display option. While designed for digital broadcast, the Broadcast Power Monitor can be used for a wide range of frequencies, power levels, and applications. Please contact the factory to discuss your application and requirements.

SELECTION GUIDE

Line Size	Power Designator	VHF (45-230 MHz)	UHF (470-890 MHz)
		Forward Power Range	Forward Power Range
7/8"	Low Medium High	5W – 500 W 20 W – 2000 W 50 W – 5000 W	2.5 W – 250 W 10 W – 1000 W 25 W – 2500 W
1 5/8"	Low Medium High	20 W – 2000 W 80 W – 8 kW 200W – 20 kW	5 W – 500 W 20 W – 2000 W 50 W – 5000 W
3 1/8"	Low Medium High	50 W – 5000 W 200 W – 20 kW 500 W – 50 kW	25 W – 2500 W 100 W – 10 kW 250 W – 25 kW
4 1/16" & 4 1/2"	Low Medium High	100 W – 10 kW 400 W – 40 kW 1000 W – 100 kW	40 W – 4 kW 150 W – 15 kW 400 W – 40 kW
6 1/8"	Low Medium High	200 W – 20 kW 800 W – 80 kW 2000 W – 200 kW	80 W – 8 kW 300 W – 30 kW 750 W – 75 kW

Channel Power Monitor

CPM Series

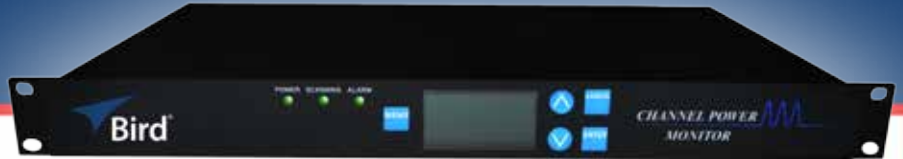

- Data logging
- Slim 1RU package
- Built-in web Server provides SNMP messaging
- Push-to-talk (PTT) compatibility is standard
- Full control of alarm and data logging settings
- 16 channels with expansion modules to cover your largest radio systems
- Software and hard contact alarms



Works with the Bird RF Meter App!
Free download from Google Play Store

MODEL 3141 (Channel Power Monitor Display)

Operating Voltage	115/230 VAC @ 50/60Hz
Operating Power	Less than 10 watts
Dimensions	5.25" x 19" x 1.75" (133.35 mm x 483 mm x 44.5 mm)
Weight	Approximately 2.0 lbs (0.85kg)
Operating Temp	0°C to + 50°C (32°F to 122°F)
Storage Temp	-20°C to + 80°C (-4°F to 176°F)
Humidity	95% ±5% max. (Noncondensing)
Altitude	up to 10,000 feet (3,048 m)

MODEL 4042 (Channel Power Sensor)

MODEL 4043 (Directional Power Sensor)

Frequency Range by Model	4042-1-430505-0201: 100 MHz to 1000 MHz 4043-1-440505-0201: 144 MHz to 174 MHz 4043-1-450505-0201: 380 MHz to 450 MHz 4043-1-460505-0201: 450 MHz to 512 MHz 4043-1-470505-0201: 762 MHz to 806 MHz 4043-1-480505-0201: 806 MHz to 869 MHz 4043-1-490505-0201: 896 MHz to 940 MHz	
Forward Power Measurement Power	1 W to 500 W	25W to 500 W
Reflected Power Measurement Power	0.1 W to 50 W	2.5W to 50 W
Dynamic Range	13 dB	
Accuracy	±5% of reading	
Impedance	50 Ohm	
Insertion Loss	< 0.2 dB	
Insertion VSWR	<1.15:1	
Intermodulation Distortion (PIM)	<-145 dBc	
Instrument Interface	RS-485 via RJ-25 Connector	
RF Connectors	N(M) / N(F)	
Power Supply	7/18 VDC, <500 mA (from 3141)	7/18 VDC, <50 mA (from 3141)
Operating Temperature	0 to 50° C	
Dimensions	5.2" x 3.8" x 1.4" (132mm x 96.5mm x 35.5mm)	
Weight	0.5 lbs (0.3 kg)	
Compliance	CE, RoHS	

MODEL 4044 (Non-Directional Power Sensor)

Frequency Range by Model	4044-1-440404-0201: 144 MHz to 174 MHz 4044-1-450404-0201: 380 MHz to 450 MHz 4044-1-460404-0201: 450 MHz to 512 MHz 4044-1-470404-0201: 762 MHz to 806 MHz 4044-1-480404-0201: 806 MHz to 869 MHz 4044-1-490404-0201: 896 MHz to 940 MHz
Power Range	2.5 - 100 W
Accuracy	±5% of reading
Impedance	50 Ohm
Insertion Loss	< 0.1 dB
Insertion VSWR	<1.10:1 max
Intermodulation Distortion (PIM)	<-140 dBc
Instrument Interface	0-4 VDC via RJ-25 Connector
RF Connectors	N(M) / N(F)
Power Supply	15 VDC, 5 mA max (from 3141)
Operating Temperature	0 to 50° C
Dimensions	2.3" x 2.2" x 1.7" (50mm x 56mm x 43mm)
Weight	0.2 lbs (0.14 kg)
Compliance	CE, RoHS

Displays

3129 Digital & 3140 Meter



3129 Digital Display

Operating Voltage	115/230 VAC @ 50/60 Hz
Operating Power	Less than 10 watts
Dimensions	5.25" X 19" X 1.75" (133.35 mm X 483 mm X 44.5 mm)
Weight	Approximately 2 lbs. (0.85 kg)
Supplied with	50 feet of cable to connect RS-232 and serial ports between 3129 and 50 feet of line section, and serial interface cable



3140A4 (4 Channels)

3140A8 (8 Channels)

Operating Voltage	115/230 VAC 50/60Hz
Operating Power	Less than 10 watts
Dimensions	3.5" X 19" X 3.5" (2 RU) (89mm X 483mm X 89mm)
Weight	Approximately 2.5 lbs (0.85kg)
Operating Temp	-10 to + 50° C (-14 to 122° F)
Storage Temp	-40 to + 80° C (-40 to 176° F)
Humidity	95% ±5% (Noncondensing)
Altitude	up to 10,000 feet (3048 m)

Transmitter Power Monitor

TPM Series

- Low Cost in-situ power measurement solution
- Integrated precision directional & non-directional couplers
- ±5% Accuracy with both analog and digitally modulated systems



Frequency Ranges	L = 54-88 MHz F = 88-108 MHz H = 174-216 MHz U = 470-806 MHz
Forward Power Range	See chart below
Reflected Power Range	10% of Forward Power Range
Measurement Type	In-Line, True Average Power
Peak Average Ratio	10dB Maximum
Directivity Rfl	30 typical, 26 dB minimum
Accuracy	±5% of reading
Dynamic Power Range	16 dB
Outputs	DB 9 Voltage I/O
Displays Offered	3140A4 (4 Channel) 3140A8 (8 Channel)

LINE SECTION

Operating Temperature	0° to +50° C (32° to 122° F)
Storage Temperature	-20° to +80° C (-4° to 176° F)
Humidity	95% ±5% max. (noncondensing)
Altitude	up to 10,000 feet (3048 m)
Weights	TPM7 = 3.5 lbs TPM1 = 5.5 lbs TPM3 = 8.0 lbs 3140 = 2.5 lbs
Calibration Cycle	Annual*

CE EMC EN 61326-1:2006 and Safety EN 61010-1:2001

* Standard calibration cycle of 1 year for reverification, but can be recalibrated by the customer with an accurate power reference. See the Application note on TPM calibration at www.bird-electronic.com

SELECTION GUIDE

VHF (54-216 MHz)

UHF (470-806 MHz)

Line Size	Forward Power Range	Power Designator	Forward Power Range	Power Designator
7/8"	15 W – 500 W 30 W – 1.0 kW 80 W – 2.5 kW 150 W – 5 kW	Low Medium High Very High	15 W – 500 W 30 W – 1 kW 80 W – 2.5 kW	Low Medium High
1 5/8"	30 W – 1.0 kW 80 W – 2.5 kW 150 W – 5 kW 300 W – 10 kW	Low Medium High Very High	30 W – 1.0 kW 80 W – 2.5 kW 150 W – 5.0 kW	Low Medium High
3 1/8"	150 W – 5 kW 300 W – 10 kW 800 W – 25 kW 1.5 kW – 50 kW	Low Medium High Very High	150 W – 5.0 kW 300 W – 10 kW 800 W – 25 kW	Low Medium High

Note: For best accuracy, pick the lowest power range that includes your maximum average operating power.

7/8" LINE SECTION PART NUMBER DEFINITION

MODEL (LINE SECTION)	INPUT CONNECTOR	OUTPUT CONNECTOR	FREQUENCY BAND	POWER**	UHF SUB-BAND
TPM7 = 7/8" line section	CONNECTOR OPTIONS		L = 54-88 MHz F = 88-108 MHz H = 174-216 MHz U = 470-806 MHz	L = Low M = Medium H = High S = Very High	A = 470-554 MHz B = 554-638 MHz C = 638-722 MHz D = 722-806 MHz
	A = N (F) B = N (M) C = LC (F) D = 7/8 EIA	H = DIN (F) J = DIN (M) K = UHF (F) L = UHF (M)			

1 5/8" OR 3 1/8" LINE SECTIONS PART NUMBER DEFINITION

MODEL (LINE SECTION)	LINE INTERFACE****	FREQUENCY BAND	POWER**	UHF SUB-BAND
TPM1 = 1 5/8" line section TPM3 = 3 1/8" line section	U = Unflanged, Recessed Center Conductor UF = Unflanged, Flush Center Conductor	L = 54-88 MHz F = 88-108 MHz H = 174-216 MHz U = 470-806 MHz	L = Low M = Medium H = High S = Very High	A = 470-554 MHz B = 554-638 MHz C = 638-722 MHz D = 722-806 MHz

* Patent Pending

** see Chart for power ranges

*** Other sizes and power ranges available upon request

****For Flanged, leave blank.

RF Monitor/Alarms


Wattcher® Series



	3126A (Single Carrier)	3127A (Single Carrier)
Power Range	300 W to 60 kW using Bird® Plug-in Elements	100 W to 250 kW using Bird® Plug-in Elements
Frequency Range	2 MHz - 1 GHz	
Accuracy	±5% of full scale	
Meter Scales FWD	15, 30, 60 kW	5, 10, 25 kW
Meter Scales RFL	1.5, 3, 6 kW	1, 2.5, 5 kW
Meter Sensitivity	100 µA/3000 Ω	
Alarms	Front panel buzzer and red LED	
Front Panel Controls	Reset push-button, reflected power limit display button, adjust alarm level recessed screw	
Rear Panel Features	FWD/RFL DC signal inputs (BNC), DC power/remote reset connector, DPDT interlock relay connector, fail-safe/nonfail-safe selector, alarm buzzer disable, AC line voltage selector, safety fuses and IEC 320 AC receptacle.	
Cable	Includes two 25 ft. DC cables	
AC Power	115/230 V, 50/60 Hz @ 0.125 A max.	
DC Power	9 to 16 V @ 1 A max.	
Finish	Gray powder coat	
Nominal Size	19" W x 5 7/32" H x 3 3/4" D (483 mm x 133 mm x 95 mm)	
Weight	5 lbs. (2.28 kg)	
Required Products	Line Section: 1 5/8", 3 1/8", 4 1/16", 6 1/8"	
Elements	Two from Tables 1 5/8 B, 3 1/8 B, 4 1/16 B, or 6 1/8 B.	Two from Tables 1 5/8 A, 3 1/8 A, 4 1/16 A, or 6 1/8 A.
Accessories	Cable: If length other than 25 ft. is desired, order two BNC (M) cables.	

RF Monitor/Alarms

Wattcher® Series

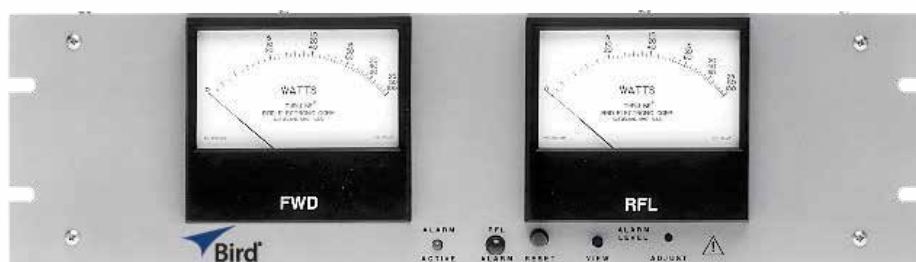

3128A (Single Carrier)

Power Range	100 mW to 10 kW using Bird® Plug-in Elements*
Frequency Range	450 kHz - 2.7 GHz
Insertion VSWR	with N connectors 1.05 max. to 1000 MHz, 1.1 max. to 2700 MHz
Accuracy	±5% of full scale
Meter Scales	FWD and RFL 25, 50, 100 W
Meter Sensitivity	30 μ A/1400 Ω
Alarms	Front Panel Buzzer and red LED
Front Panel Controls	Reset push-button, reflected power limit display button, adjust alarm level recessed screw
Rear Panel Features	FWD/RFL DC signal inputs (BNC), DC power/remote reset connector, DPDT interlock relay connector, fail-safe/nonfail-safe selector, alarm buzzer disable, AC line voltage selector, safety fuses and IEC 320 AC receptacle.
Cable	Includes two 25 ft. DC cables
AC Power	115/230 VAC, 50/60 Hz @ 0.125A
DC Power	9 - 16 VDC @ 1A
Finish	Gray powder coat
Nominal Size	19" W x 5 7/32" H x 3 3/4" D (483 mm x 133 mm x 95 mm)
Weight	5 lbs. (2.28 kg)
Required Products	Line Section: 4522-002-5 QC connectors: Two Elements: Two from Tables 1, 2, 3, 4, or 6

RF Monitor/Alarms

High-Speed Wattcher® Series



3170B (Dual Meter - Dual Element - Single Carrier)

Power Range	100 mW to 10 kW using Bird® Plug-in Elements*
Frequency Range	450 kHz - 2.7 GHz
Insertion VSWR	with N connectors 1.05 max. to 1000 MHz, 1.1 max. to 2700 MHz
Accuracy	±5% of full scale
Meter Scales	FWD and RFL 25, 50, 100 W
Alarms	Front Panel Buzzer, "Active" and "Trip" LEDs for forward/reflected
Response Time	25 µs max.
Activate Forward	73 µs to 50 ms nominal (adjustable) monitor delay
Front Panel Controls	Reset push-button, adjust FWD/RFL alarm levels screw, element sockets
Rear Panel Features	DC FWD/RFL signal inputs, main and remote meter drive outputs, external 12-16 VDC supply input, alarm in/out, reset in/out, AC line voltage selector, fuse, IEC 320 AC receptacle.
Inputs/Outputs	TTL compatible +5 V logic. Outputs for remote meter
AC Power	115/230 VAC, 50/60 Hz @ 56 mA
DC Power	12.7 to 16.0 VDC @ 400 mA max.
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size	19" W x 5 7/32" H x 9 5/16" D (483 mm x 133 mm x 237 mm)
Weight	7 lbs. (3.2 kg)
Required Products	Elements: Two from Tables 1, 2, 3, 4, or 6
Calibration Cycle	1 Year for element

RF Monitor/Alarms

High-Speed Wattcher® Series



	3171B (Dual Meter - Single Carrier)	3171B020 (Dual Meter - Single Carrier)
Power Range	100 W to 250 kW using Bird® Plug-in Elements	
Frequency Range	2 MHz - 1 GHz	
Accuracy	±5% of full scale	
Meter Scales	FWD and RFL 5, 10, 25 kW	FWD and RFL 15, 30, 60 kW
Alarms	Front Panel Buzzer, "Active" and "Trip" LEDs for forward/reflected	
Response Time	25 µs max.	
Activate Forward	73 µs to 50 ms nominal (adjustable) Monitor Delay	
Front Panel Controls	Reset push-button, adjust FWD/RFL alarm levels screw	
Rear Panel Features	DC FWD/RFL signal inputs, main and remote meter drive outputs, external 12-16 VDC supply input, alarm in/out, reset in/out, AC line voltage selector, fuse, IEC 320 AC receptacle.	
Inputs/Outputs	TTL compatible +5 V logic. Outputs for remote meter	
Cable	Includes two 25 ft. DC cables	
AC Power	115/230 V, 50/60 Hz @ 56 mA max.	
DC Power	12.7 to 16.0 VDC @ 400 mA max.	
Finish	Gray powder coat	
Nominal Size	19" W x 5 7/32" H x 9 21/64" D (483 mm x 133 mm x 237 mm)	
Weight	5 1/2 lbs. (2.5 kg)	
Required Products	Line Section: 1 5/8", 3 1/8", 4 1/16", 6 1/8"	
Elements	Two from Tables 1 5/8 AA, 3 1/8 AA, 4 1/16 AA, or 6 1/8 AA.	Two from Tables 1 5/8 BB, 3 1/8 BB, 4 1/16 BB, or 6 1/8 BB.
Accessories	Cable: If length other than 25 ft. is desired, order two BNC (M) cables.	

Portable Wattmeters

Thruline® RF Directional



43

Power Range	100 mW - 10 kW using Bird® Plug-in Elements.*
Frequency Range	450 kHz - 2.7 GHz (depending on element)
Insertion VSWR	with N Connectors 1.05 max. to 1000 MHz
Accuracy	±5% of full scale
Connectors	QC Type (Female N normally supplied)
Finish	Light Gray powder coat
Nominal Size includes connectors	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	3 lbs. (1.4 kg)
Elements	Tables 1, 2, 3, 4, 6



43P (with Peak Power Retrofit Kit 4300-400)

Power Range	100 mW - 10 kW using Bird® Plug-in Elements.*
Frequency Range	450 kHz - 2.7 GHz (depending on element)
Accuracy	CW Mode: ±5% full scale, Peak mode: ±8% full scale
Modulation	Normal voice audio; or (Peak Mode) Rectangular Pulses; Duty cycle: 2% (min); Repetition rate: 100 pps (min); Pulse width: 200 µs (min)
Connectors	QC Type (Female N normally supplied)
Battery (Life)	48 hours typical
Weight	Adds 1 lb. to Model 43



4431 (Variable RF TAP)

Power Range	5 kW max. 2 - 30 MHz
Frequency Range	1 kW max. 30 - 1000 MHz** using Bird® Plug-in Elements*
Insertion VSWR	with N Connectors 1.07 max.** to 1000 MHz
Accuracy	±5% of full scale
Insertion Loss	0.1 dB max. (2-512 MHz), 0.2 dB max. (512-1000 MHz)*
RF Sample Output	Variable -15 to -70 dB from BNC (Female) port
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size includes connectors	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	3 1/2 lbs. (1.6 kg)
Elements	Tables 1, 2, 3, 4, 6 (within power/frequency range limits stated above)
Accessories	Case

*Quoted accuracy only when used with other Bird® Products

**Applies only when coupling is less than 30 dB

Portable Wattmeters

Thruline® RF Directional



4314C (P EP, Single Element)

Power Range	100 mW - 10 kW using Bird® Plug-in Elements.*
Frequency Range	450 kHz - 2.7 GHz (depending on element)
Insertion VSWR	with N Connectors 1.05 max. to 1000 MHz
Accuracy	±5% of full scale CW, ±8% PEP
Pulse Parameters	(min.) Pulse width 0.4 μs (100-2300 MHz), 1.5 μs (26-99 MHz) and 15 μs (2-25 MHz); repetition rate 30 pps and duty factor 1 x 10 ⁻⁴ min.
Battery	Two 9-Volt alkaline transistor batteries
AC Power	120 VAC, 60 Hz or 220 VAC, 60 Hz (using Bird® adapter)
Connectors	QC Type (Female N normally supplied)
Finish	Light Gray powder coat
Nominal Size includes connectors	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	3 lbs. (1.4 kg)
Elements	Tables 1, 2, 3, 4, 5, 6
Accessories	Case, spare batteries, extra QC connectors.



4305A (High-Power)

Power Range	50 W - 25 kW using Bird® Plug-in Elements.*
Frequency Range	450 kHz - 2.3 GHz (depending on element)
Insertion VSWR	with N Connectors 1.05 max.
Accuracy	±5% of full scale
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size includes connectors	6 5/16" H x 5 1/8" W x 4 1/4" D, (161 mm x 131 mm x 108 mm)
Weight	3 1/4 lbs. (1.5 kg)
Elements	4305A element table below and 1 5/8AA table
Accessories	Case

4305A ELEMENT SELECTION GUIDE

		Frequency Bands (MHz)					
		.45-2.5	2-30	50-125	100-250	400-1000	1100-1800
Power Range	50 W	—	—	—	—	—	50K7
	2500 W	—	—	2500B7	2500C7	2500E7	—
	5000 W	—	—	5000B7	—	—	—
	10 kW	—	10KH7	—	—	—	—
	25 kW	25KP7	—	—	—	—	—

Portable Wattmeters

Thruline® RF Directional



4304A (Fixed 25-1000 MHz 5-500 Watt Element)

Power Ranges	5, 15, 50, 150, 500 W, with no scale limitations except power limited to 150 W from 800-1000 MHz
Frequency Range	25 MHz - 1.0 GHz
Insertion VSWR	25-521 MHz, 1.05 max. (with UHF female conn.), 512-1000 MHz, 1.07 max.
Insertion Loss	25-512 MHz, 0.10 dB max. with UHF female conn., 512-1000 MHz range, 0.13 dB max.
Accuracy	25-100 MHz, $\pm 7\%$ of full scale, using correction charts. 100-512 MHz, $\pm 6\%$ of full scale, no correction needed. 512-1000 MHz, $\pm 7\%$ of full scale, no correction needed.
Connectors	QC Type (Female N normally supplied)
Finish	Light Gray powder coat
Nominal Size includes connectors	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	3 lbs. (1.36 kg)
Accessories	Case



4308 (Cellular Specialist)

Power Ranges	1.5, 5, 15, 50 W, with no scale limitations
Frequency Range	440 MHz - 960 MHz
Insertion VSWR	1.05 with TNC connectors (QC Type)
Accuracy	$\pm 5\%$ of full scale
Connectors	QC Type (Female TNC normally supplied)
RF Sample Output	Variable -15 to -70 dB from BNC (Female) port
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size includes connectors	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	3 lbs. (1.36 kg)
Accessories	Case

Portable Wattmeters

Thruline® RF Directional



4410 Series (Multipower)

Battery	4410A - 9V Alkaline Battery 4412A-Rechargeable Battery
Power Range	300 mW - 1 kW or 2 W - 10 kW full scale in one single Plug-in Element
Frequency Range	200 kHz - 2.3 GHz CW or FM
Insertion VSWR	with N Connectors 1.25 max. to 2300 MHz
Accuracy	±5% of reading for any reading above 20% of the Power Range selected for FM or CW signals without AM. This accuracy is maintained for a full 37 dB dynamic range with each 4410 Element (except No. 4410-1 200 kHz-535 kHz which is accurate to ±10% of reading, and 4410-15 1.0-1.8 GHz and 4410-16 1.8-2.3 GHz which are accurate to ±8% of reading.)
Ambient Temp. Range	Elements 4410-1 through -8 and -10 through -16 are temperature compensated for rated accuracy from 0°C to 50°C (32°F to 122°F)
Over-Range	To 120% of nominal full scale
Protection	(i.e. 12 W, 120 W, 1200 W, or 12,000 W). No damage or degradation to the unit will result, regardless of the Range Selector Switch position.
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size includes connectors	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	4410A: 3 lbs. (1.4 kg), 4412A: 3 1/3 lbs. (1.5 kg)
Elements	Tables 10, 11, 12 (below)
Accessories	Case, spare battery

4410 ELEMENT SELECTION GUIDE

TABLE 10	Full-Scale Power and Frequency Ranges 0-100, 300 Milliwatts, 1, 3, 10, 30, 100 Watts						
Frequency Bands (MHz)							
25-80	50-125	100-250	200-500	400-1000	1000-1800	1800-2300	
4410-10	4410-11	4410-12	4410-13	4410-14	4410-15*	4410-16*	

TABLE 11	Full-Scale Power and Frequency Ranges 0-1, 3, 10, 30, 100, 300, 1000 Watts				
Frequency Bands (MHz)					
2-30	25-80	50-200	144-520	200-1000	
4410-3	4410-5	4410-6	4410-7	4410-8	

TABLE 12	Full-Scale Power and Frequency Ranges 0-10, 30, 100, 300, 1000, 3000, 10,000 Watts		
Frequency Bands (MHz)			
0.2-0.535	0.45-2.5	2-30	
4410-1	4410-2	4410-4	

*Accuracy is ±8% of reading

Portable Wattmeters

Thruline® RF Directional



APM-16 (Average Reading Power Meter)

Power Range	1 W - 1000 W
Frequency Range	2 MHz - 1000 MHz
Accuracy	10°C to 35°C ±4% reading, ±1% full scale, -20°C to 50°C ±6% reading, ±2% full scale
Peak/Avg. Ratio	In excess of 10 dB
Insertion VSWR	(with N connector) 1.05 max. to 1000 MHz
Setting Time	< 1 second
Meter	Shock mounted, linear scale with expanded scales of 25, 50 and 100 for full scale 1 to 1000 W readings. Mirrored scale includes 5% overrange.
Temp. Ranges	-20°C to 50°C operating; -25°C to 65°C storage
Humidity	95% ±5% max. (noncondensing)
Battery	Internal 9 volt
Connectors	QC type (Female N normally supplied)
Nominal Size	6 7/8" H x 5 1/8" W x 3 5/8" D, (175 mm x 130 mm x 92 mm)
Weight	3 lbs. (1.4 kg)
Elements	Special APM Series (below)
Recommended Accessories	Case

ELEMENT SELECTION GUIDE

	Frequency Bands (MHz)						
	2-30	25-60	50-125	100-250	200-500	400-800	800-960
1 W	—	—	APM-1B	APM-1C	—	APM-1E-400	APM-1E-800
2.5 W	—	—	APM-2.5B	—	APM-2.5D	APM-2.5E-400	APM-2.5E-800
5 W	APM-5H	APM-5A	APM-5B	APM-5C	APM-5D	APM-5E-400	APM-5E-800
10 W	APM-10H	APM-10A	APM-10B	APM-10C	APM-10D	APM-10E-400	APM-10E-800
25 W	—	—	APM-25B	APM-25C	APM-25D	APM-25E-400	APM-25E-800
50 W	—	—	—	APM-50C	APM-50D	APM-50E-400	APM-50E-800
100 W	APM-100H	APM-100A	APM-100B	APM-100C	APM-100D	APM-100E-400	APM-100E-800
250 W	APM-250H	APM-250A	APM-250B	APM-250C	APM-250D	APM-250E-400	APM-250E-800
500 W	APM-500H	—	APM-500B	APM-500C	APM-500D	APM-500E-400	APM-500E-800
1000 W	APM-1000H	—	APM-1000B	APM-1000C	—	APM-1000E-400	APM-1000E-800

Portable Wattmeters

Thruline® RF Directional




4391A (Rugged, RF Power Analyst®)

Power Range	100 mW to 10 kW using Bird® Plug-in Elements*
Frequency Range	450 kHz - 2.7 GHz
Insertion VSWR	with N connectors 1.05 max. to 1000 MHz
Accuracy	Power Readings: $\pm 5\%$ of full scale CW, $\pm 8\%$ PEP VSWR: $\pm 10\%$ of reading % Modulation: (CW power 1/3 or more of full scale) $\pm 5\%$ (0-90%), $\pm 10\%$ (90-100%)
Usable Over-range	to 120% of scale (CW, PEP, SWR and Return Loss)
Sampling Rate	2 to 3 readings per second
Display	3 1/2 digit, 0.3" LED strobed
Modulation	25 to 10,000 Hz (Audio)
Pulse Parameters	(min.) Pulse width 0.8 μ s (100-2700 MHz), 1.5 μ s (26-99 MHz) and 15 μ s (2-25 MHz) Repetition Rate 25 PPS, and Duty Factor 1×10^{-4}
Return Loss	± 0.3 dB to corresponding SWR value
Battery Life	8 hours (rechargeable)
AC Power	100-130/200-260 V, 50/60 Hz, 6 W
Connectors	QC Type (Female N normally supplied)
Finish	Blue vinyl with silver anodized side panels
Nominal Size	9 9/16" L x 5 7/32" W x 4 5/16" H
includes connectors	(243 mm x 158 mm x 110 mm)
Weight	5 3/4 lbs. (2.6 kg)
Elements	Select two elements in a 10:1 power ratio from Tables 1, 2, 3, 4, 5, 6 and 14
Accessories	Case

*Quoted accuracy only when used with other Bird® products.

Panel Mount Wattmeters

Thruline® RF Directional

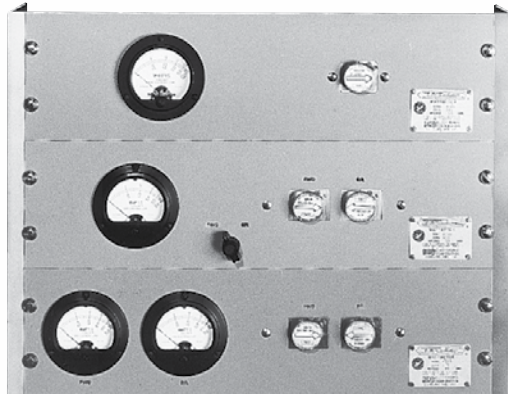

4521, 4522 & 4526

Power Range	100 mW - 10 kW using Bird® Plug-in Elements
Frequency Range	450 kHz - 2.7 GHz (depending on element)
Insertion VSWR	with N Connectors 1.05 max. to 1000 MHz
Accuracy	±5% of full scale
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size	19" W x 5 7/32" H x 1 11/16" D (483 mm x 133 mm x 43 mm)
Weight	3 1/2 lbs. (1.6 kg)
Weight	3 lbs. (1.36 kg)
Elements	Tables 1, 2, 3, 4, 6

*Applies only when coupling is less than 30 dB

**Quoted accuracy only when used with other Bird® Products



4527 (2-512 MHz with Sampler Port)

Power Ranges	100 mW to 10 kW using Bird® Plug-in Elements*
Frequency Range	2 - 512 MHz (depending on element)
Insertion VSWR	with N Connectors 1.05 max. to 512 MHz
Accuracy	±5% of full scale
RF Sample Output	Fixed at -53 dB from 512 to 10 MHz, decreasing to -70 dB at 2 MHz BNC (Female) port
Connectors	QC Type (Female N normally supplied)
Finish	Gray powder coat
Nominal Size	19" W x 5 7/32" H x 1 11/16" D
includes connectors	(483 mm x 133 mm x 43 mm)
Weight	3 1/2 lbs. (1.6 kg)
Elements	2 to 512 MHz models within Tables 1, 2, 6

Field Replacement Meter

Thruline® Wattmeter Movement Kit



RPK 43-4

Type	3 1/2" Round Kit w/ Cable
Current	30 μ A/1400 Ω
Scales	25/50/100 W
Use with Element Tables	1, 2, 3, 4, 6



4210A100

Type	3 1/4" Square Meter in Housing
Current	30 μ A/1400 Ω
Scales	25/50/100 W
Use with Element Tables	1, 2, 3, 4, 6

Rigid Line Sections

Thruline® Wattmeter Components



1 5/8" LINE SECTIONS

	Connector Type	Line Size (Inches)	Element Sockets	Length (Inches)	Weight
4715-000	EIA Flg.	1 5/8"	2	6.75	3.25
4723-000	UnFlg. (Rec. 0.438")	1 5/8"	2	6.38	1.5
4723-020	UnFlg. (Flush)	1 5/8"	2	6.38	1.5



3 1/8" LINE SECTIONS

	Connector Type	Line Size (Inches)	Element Sockets	Length (Inches)	Weight
4610-000	EIA Flg.	3 1/8"	2	7.03	7.25
4801-100	UnFlg. (Rec. 0.438")	3 1/8"	2	6.5	4.25
4802-000	UnFlg. (Flush)	3 1/8"	2	6.5	4.25



4 1/16" LINE SECTIONS

	Connector Type	Line Size (Inches)	Element Sockets	Length (Inches)	Weight
4642-010	Flg. (MYAT)	4 1/16"	2	8.13	8.88



6 1/8" LINE SECTIONS

	0.0556 in	Line Size (Inches)	Element Sockets	Length (Inches)	Weight
4905-000	EIA Flg.	6-1/8"	2	10.22	17
4909-000	UnFlg. (Rec. 0.438")	6-1/8"	2	9.63	12.75




7/8" LINE SECTIONS

	Connector Type	Line Size (Inches)	Element Sockets	Length (Inches)	Weight
4230-018	N-Type (F)	7/8"	1	5 1/2	1 1/3
4230-006-1	QC (not included)	7/8"	1	4	1
4230-059	QC (not included)	7/8"	1 w/bracket	6 7/32	1 1/4
4522-002-5	QC (not included)	7/8"	2 panel mt.	6.38	1 1/4

Rigid Line Wattmeters

3127 & 6810 Series

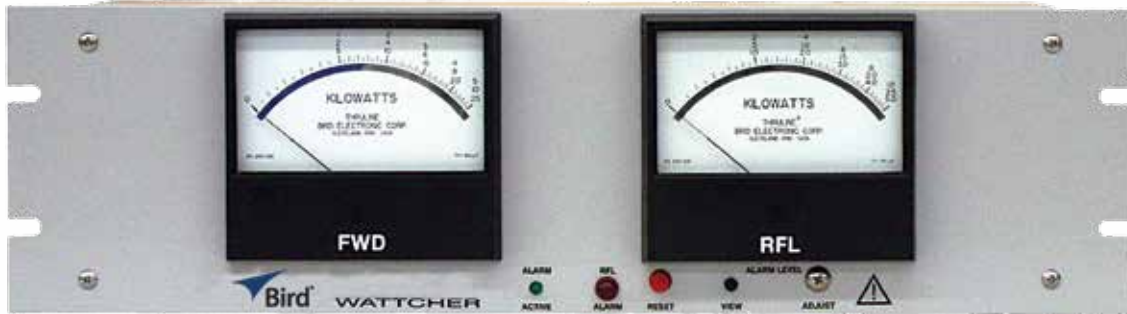

3127 Series	SELECTION GUIDE			
	Type	Scales	DC Cable (Ft.)	Uses Line Section
3127-035	Single 4-1/2" rectangular on panel	5/10/25 kW	25	Double Socket
3127-055	Single 4-1/2" rectangular on panel w/fwd. and rfl. switch	5/10/25 kW	25	Double Socket
3127-040	Dual 4-1/2" rectangular on panel	5/10/25 kW	25	Double Socket
3127-080	Single 4-1/2" rectangular on panel w/fwd. and rfl. switch	15/30/60 kW	25	Double Socket
3127-075	Dual 4-1/2" rectangular on panel	15/30/60 kW	25	Double Socket



6810 Series	SELECTION GUIDE			
	Type	Scales	DC Cable (Ft.)	Uses Line Section
6810-220	4-1/2" rectangular in housing w/fwd. and rfl. switch	5/10/25 kW	10	Double Socket
6810-230	4-1/2" rectangular in housing w/fwd. and rfl. switch	15/30/60 kW	10	Double Socket
6810-250	4-1/2" rectangular in housing w/fwd. and rfl. switch	8/80 kW	10	Double Socket
6810-265	4-1/2" rectangular in housing	8/80 kW	10	Single Socket
6810-307	4-1/2" rectangular in housing	15/30/60 kW	10	Single Socket
6810-309-7	4-1/2" rectangular in housing	5/10/25 kW	10	Single Socket

Plug-In Elements

Selection Guide



Model Select Element From Table(s)

- 3128A** 1, 2, 3, 4, 6, 14*
- 3170B** 1, 2, 3, 4, 6, 14*
- 43** 1, 2, 3, 4, 6, 14*
- 43P** 1, 2, 3, 4, 5, 6
- 4305A** 4305A Elements, 1 5/8AA
- 4314C** 1, 2, 3, 4, 5, 6, 14*

Model Select Element From Table(s)

- 4391A** 1, 2, 3, 4, 5, 6, 14*
- 4410A, 4412A** (see page 39)
- 4431** 1, 2, 3, 4, 6, 14*
- 4521, 4522** 1, 2, 3, 4, 6, 14*
- 4526** 1, 2, 3, 4, 6, 14*
- 4527** 2 MHz to 512 MHz elements in 1,2, 6,14*

*Table 14 describes coupler elements used for RF sampling. The instrument meter does not read when these elements are installed, but simply serves as a line section.

TABLE 1 STANDARD ELEMENTS

Power Range	Frequency Bands (MHz)						
	2-30	25-60	50-125	100-250	200-500	400-800	800-1000
5 W	—	5A	5B	5C	5D	5E-400	5E-800
10 W	—	10A	10B	10C	10D	10E-400	10E-800
25 W	—	25A	25B	25C	25D	25E-400	25E-800
50 W	50H	50A	50B	50C	50D	50E-400	50E-800
100 W	100H	100A	100B	100C	100D	100E-400	100E-800
250 W	250H	250A	250B	250C	250D	250E-400	250E-800
500 W	500H	500A	500B	500C	500D	500E-400	500E-800
1000 W	1000H	1000A	1000B	1000C	1000D	1000E-400	1000E-800
2500 W	2500H	—	—	—	2500D	—	—
5000 W	5000H	—	—	—	—	—	—

TABLE 2 LOW POWER ELEMENTS

Part No.	1 Watt Frequency (MHz)											
	40-50	50-60	60-80	80-90	95-125	110-160	150-250	200-300	275-450	425-850	800-1000	
Part No.	040-1	050-1	060-1	080-1	095-1	110-1	150-1	200-1	275-1	425-1	801-1	
Part No.	2.5 Watt Frequency (MHz)											
	25-30	30-40	40-50	50-60	60-80	80-95	95-150	150-250	200-300	250-450	400-850	800-1000
Part No.	025-2	030-2	040-2	050-2	060-2	080-2	095-2	150-2	200-2	250-2	400-2	801-2

Table 3 HIGH-FREQUENCY ELEMENTS, ENTIRE TABLE ±8% FS

Power Range	Frequency Bands (MHz)	
	950-1100	1100-1260
1 W	1J-950	1J-1100
2.5 W	2.5J-950	2.5J-1100
5 W	5J-950	5J-1100
10 W	10J-950	10J-1100
25 W	25J-950	25J-1100
50 W	50J-950	50J-1100
100 W	100J-950	100J-1100
250 W	250J-950	250J-1100

TABLE 4 LOW-FREQUENCY ELEMENTS

Power Range	Frequency Band (MHz)
	.45 - 2.5 MHz
1000 W	1000P
2500 W	2500P
5000 W	5000P
10000 W	10000P

Plug-In Elements

Selection Guide



TABLE 5 PULSE-POWER ELEMENTS, ENTIRE TABLE ±8% OF FULL SCALE

Power Range	Frequency Bands (MHz)							
	2-30	25-60	50-125	100-250	400-800	800-1000	950-1100	1100-1260
500 W	—	—	—	—	—	—	500J-950	500J-1100
1000 W	—	—	—	—	—	—	1000J-950	1000J-1100
2500 W	—	2500A	2500B	2500C	2500E-400	2500E-800	2500J-950	2500J-1100
5000 W	—	5000A	5000B	5000C	5000E-400	5000E-800	5000J-950	5000J-1100
10000 W	10000H	—	10000B	—	10000E-400	10000E-800	—	—

Refer to "Transmission Power Rating Chart" for max. power ratings. Elements are capable of reading peak and average power.

TABLE 6 MILLIWATT ELEMENTS

Cat. No.	100 mW Frequency (MHz)												
	40-50	72-76	108-136	135-175	320-340	328-336	400-420	420-450	450-470	600-800	800-1000		
	430-266	430-2	430-57	430-86	430-205	430-3	430-7	430-208	430-8	430-169	430-263		
Cat. No.	250 mW Frequency (MHz)												
	72-76	88-108	105-120	116-126	130-150	190-210	450-470	800-1000					
	430-22	430-217	430-20	430-48	430-13	430-65	430-61	430-264					
Cat. No.	500 mW Frequency (MHz)												
	72-76	88-108	105-120	120-136	136-150	240-290	290-340	340-360	350-400	400-450	450-500	600-800	800-1000
	430-33	430-247	430-26	430-248	430-249	430-27	430-253	430-157	430-254	430-255	430-256	430-258	430-265

NONDIRECTIONAL SAMPLER ELEMENTS FOR QC-TYPE OR 7/8" EIA LINE

	Frequency Band (MHz)	Nominal Coupling	Max. Main Line Power
4274-025	25-1000	-50 dB ± 2 dB (-66 dB @ 2 MHz)	500 W
4274-050	100-400	-35 to -48 dB (±1 dB) Adjustable	500 W

TABLE 14 DIRECTIONAL COUPLER ELEMENTS FOR QC-TYPE OR 7/8" EIA LINE

Model No.	Frequency Bands (MHz)		
	Freq Band (MHz)	Nominal Coupling	Max. Main Line Power
400-50	50-100	-40 dB	1 kW
400-75	75-150	-40 dB	1 kW
400-125	125-250	-40 dB	1 kW
400-225	225-450	-40 dB	1 kW
400-400	400-800	-40 dB	1 kW
400-750	750-1250	-40 dB	1 kW

TABLE 16 DIRECTIONAL COUPLER ELEMENTS FOR 3 1/8" EIA LINE

Model No.	Frequency Bands (MHz)		
	Freq Band (MHz)	Nominal Coupling	Max. Main Line Power
553-25	25-40	-55 dB	25 kW
553-50	50-100	-55 dB	25 kW
553-75	75-150	-55 dB	25 kW
553-125	125-250	-55 dB	25 kW
553-225	225-450	-55 dB	25 kW
553-401	400-800	-55 dB	15 kW
553-750	750-1250	-55 dB	10 kW

TABLE 15 DIRECTIONAL COUPLER ELEMENTS FOR 1 5/8" EIA LINE

Model No.	Frequency Bands (MHz)		
	Freq Band (MHz)	Nominal Coupling	Max. Main Line Power
501-50	50-100	-50 dB	10 kW
501-75	75-150	-50 dB	10 kW
501-125	125-250	-50 dB	10 kW
501-225	225-450	-50 dB	10 kW
501-400	400-800	-50 dB	5 kW

TABLE 17 DIRECTIONAL COUPLER ELEMENTS FOR 6 1/8" EIA LINE

Model No.	Frequency Bands (MHz)		
	Freq Band (MHz)	Nominal Coupling	Max. Main Line Power
606-50	50-100	-60 dB	60 kW
606-75	75-150	-60 dB	60 kW
606-125	125-250	-60 dB	60 kW
606-225	125-250	-60 dB	60 kW
606-400	400-870	-60 dB	60 kW

NOTE: For use in any line section including BPME

Plug-In Elements

Selection Guide



Model Select Element From Table(s)

- 3126A** 1 5/8 B, 3 1/8 B, 4 1/16 B, 6 1/8 B
- 3127A** 1 5/8 A, 3 1/8 A, 6 1/8 A
- 3127-035** 1 5/8 A, 3 1/8 A, 4 1/16 A, 6 1/8 A
- 3127-040** 1 5/8 A, 3 1/8 A, 4 1/16 A, 6 1/8 A
- 3127-055** 1 5/8 A, 3 1/8 A, 4 1/16 A, 6 1/8 A
- 3127-075** 1 5/8 B, 3 1/8 B, 4 1/16 B, 6 1/8 B
- 3127-080** 1 5/8 B, 3 1/8 B, 4 1/16 B, 6 1/8 B

Model Select Element From Table(s)

- 3171B020** 1 5/8 BB, 3 1/8 BB, 4 1/16 BB, 6 1/8 BB
- 3171B** 1 5/8 AA, 3 1/8 AA, 4 1/16 AA, 6 1/8 AA
- 6810-220** 1 5/8 A, 3 1/8 A, 4 1/16 A, 6 1/8 A
- 6810-309-7** 1 5/8 A, 3 1/8 A, 4 1/16 A, 6 1/8 A
- 6810-230** 1 5/8 B, 3 1/8 B, 4 1/16 B, 6 1/8 B
- 6810-250** 4 1/16 C, 6 1/8 C
- 6810-307** 1 5/8 B, 3 1/8 B, 4 1/16 B, 6 1/8 B
- 6810-265** 4 1/16 C, 6 1/8 C

TABLE 1 5/8 A STANDARD ELEMENTS 100 µA

Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	100 W	—	100B1
250 W	—	250B1	250C1
500 W	—	500B1	500C1
1000 W	1000H1	1000B1	1000C1
2500 W	2500H1	2500B1	2500C1
5000 W	5000H1	5000B1	5000C1
10 kW	10KH1	10KB1	10KC1
25 kW	25KH1	25KB1	—

TABLE 1 5/8 AA STANDARD ELEMENTS 30 µA

Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	100 W	—	100B12
250 W	—	250B12	250C12
500 W	500H12	500B12	500C12
1000 W	1000H12	1000B12	1000C12
2500 W	2500H12	2500B12	2500C12
5000 W	5000H12	5000B12	5000C12
10 kW	10KH12	10KB12	—
25 kW	25KH12	25KB12	—

TABLE 1 5/8 B STANDARD ELEMENTS 100 µA

Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	300 W	—	300B1
600 W	—	600B1	600C1
1500 W	1500H1	1500B1	1500C1
3000 W	3000H1	3000B1	3000C1
6000 W	6000H1	6000B1	6000C1
15 kW	15KH1	15KB1	—

TABLE 1 5/8 BB STANDARD ELEMENTS 30 µA

Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	300 W	300H12	300B12
600 W	600H12	600B12	600C12
1500 W	1500H12	1500B12	1500C12
3000 W	3000H12	3000B12	3000C12
6000 W	6000H12	6000B12	6000C12
15 kW	15KH12	15KB12	—

TABLE 1 5/8 C STANDARD ELEMENTS 100 µA

Power Range	Frequency Bands (MHz)
	50-125
8000 W	8000B1

TABLE 3 1/8 A STANDARD ELEMENTS 100 µA

Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	100 W	—	100B3
250 W	—	250B3	250C3
500 W	—	500B3	500C3
1000 W	—	1000B3	1000C3
2500 W	2500H3	2500B3	2500C3
5000 W	5000H3	5000B3	5000C3
10 kW	10KH3	10KB3	10KC3
25 kW	25KH3	25KB3	25KC3
50 kW	50KH3	50KB3	50KC3
100 kW	100KH3	—	—

TABLE 3 1/8 AA STANDARD ELEMENTS 30 µA

Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	100 W	—	100B32
250 W	—	250B32	250C32
500 W	500H32	500B32	500C32
1000 W	1000H32	1000B32	1000C32
2500 W	2500H32	2500B32	2500C32
5000 W	5000H32	5000B32	5000C32
10 kW	10KH32	10KB32	10KC32
25 kW	25KH32	25KB32	25KC32
50 kW	50KH32	50KB32	50KC32
100 kW	100KH32	—	—

TABLE 3 1/8 B STANDARD ELEMENTS 100 µA

Power Range	Frequency Bands (MHz)	
	50-125	100-250
	600 W	600B3
1500 W	1500B3	1500C3
3000 W	3000B3	3000C3
6000 W	6000B3	6000C3
15 kW	15KB3	15KC3
30 kW	30KB3	30KC3

Plug-In Elements

Selection Guide



TABLE 3 1/8 BB STANDARD ELEMENTS 30 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	600 W	600B32
1500 W	1500B32	1500C32
3000 W	3000B32	3000C32
6000 W	6000B32	6000C32
15 kW	15KB32	15KC32
30 kW	30KB32	30KC32

TABLE 3 1/8 C STANDARD ELEMENTS 100 μ A		
Power Range	Frequency Bands (MHz)	
	100-250	
	8000 W	8000C3

TABLE 4 1/16 A STANDARD ELEMENTS 100 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	2500 W	2500B5
5000 W	5000B5	5000C5
10 kW	10KB5	10KC5
25 kW	25KB5	25KC5
50 kW	50KB5	50KC5

TABLE 4 1/16 AA STANDARD ELEMENTS 30 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	2500 W	2500B5
5000 W	5000B5	5000C5
10 kW	10KB5	10KC5
25 kW	25KB5	25KC5

TABLE 4 1/16 B STANDARD ELEMENTS 100 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	1500 W	1500B5
3000 W	3000B5	3000C5
6000 W	6000B5	6000C5
15 kW	15KB5	15KC5
30 kW	30KB5	30KC5
60 kW	60KB5	60KC5

TABLE 4 1/16 BB STANDARD ELEMENTS 30 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	1500 W	1500B52
3000 W	3000B52	3000C52
6000 W	6000B52	6000C52
15 kW	15KB52	15KC52
30 kW	30KB52	30KC52
60 kW	60KB52	60KC52

TABLE 4 1/16 C STANDARD ELEMENTS 100 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	8000 W	8000B5
80 kW	80KB5	80KC5

TABLE 6 1/8 A STANDARD ELEMENTS 100 μ A			
Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	1000 W	—	1000B6
2500 W	—	2500B6	2500C6
5000 W	—	—	5000C6
10 kW	10KH6	10KB6	10KC6
25 kW	25KH6	25KB6	25KC6
50 kW	50KH6	50KB6	50KC6
100 kW	10KH6	100KB6	100KC6
250 kW	250KH6	—	—

TABLE 6 1/8 AA STANDARD ELEMENTS 30 μ A			
Power Range	Frequency Bands (MHz)		
	2-30	50-125	100-250
	250 W	—	—
500 W	—	500B62	500C62
1000 W	1000H62	1000B62	1000C62
2500 W	2500H62	2500B62	2500C62
5000 W	—	5000B62	5000C62
10 kW	10KH62	10KB62	10KC62
25 kW	—	25KB62	25KC62
50 kW	50KH62	50KB62	50KC62
100 kW	100KH62	100KB62	100KC62

TABLE 6 1/8 B STANDARD ELEMENTS 100 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	3000 W	3000B6
6000 W	6000B6	6000C6
15 kW	15KB6	15KC6
30 kW	30KB6	30KC6
60 kW	60KB6	60KC6

TABLE 6 1/8 BB STANDARD ELEMENTS 30 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	3000 W	3000B62
6000 W	6000B62	6000C62
15 kW	15KB62	15KC62
30 kW	30KB62	30KC62
60 kW	60KB62	60KC62

TABLE 6 1/8 C STANDARD ELEMENTS 100 μ A		
Power Range	Frequency Bands (MHz)	
	50-125	100-250
	8000 W	8000B6
80 kW	80KB6	80KC6



Convection Cooled Loads



- Self cooling design, needs no cooling plate
- Frequencies up to 18 GHz
- Fully shielded against production of extraneous radiation
- Load requires no AC power
- Rugged Construction
- Broadband Operation

Coolant Method	Dry, Convection Cooled	Ambient Temperature	-40°C to 40°C
Impedance	50 Ohm	AC Power	None**
Operating Position	Any	Humidity	95% non-condensing
PIM	-110 dBc Min.		

	Power Rating	Connector	VSWR & Frequency Range	Dimensions (LxWxH)	Weight	Finish
2-T	2 W	SMA, BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	2.9" x 1.4" Dia 74 x 36 Dia. mm	4.6 oz. 131 g	Tri-alloy
2-NT	2 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.15:1 from 1 to 3 GHz	2.9" x 1.4" Dia 74 x 36 Dia. mm	4.6 oz. 131 g	
2-18T	2 W	SMA, N	1.20:1 from DC to 12.4 GHz 1.25:1 from 12.4 to 18 GHz	1.0" x 0.9" Dia. 26 x 23 Dia. mm	2.0 oz. 57 g	Stainless Steel
5-T	5 W	BNC, 7/16 DIN, N, TNC, MD	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	2.9" x 1.4" Dia 74 x 36 Dia. mm	4.6 oz. 131 g	Tri-alloy
5-NT	5 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	2.9" x 1.4" Dia 74 x 36 Dia. mm	4.6 oz. 131 g	
5-18T	5 W	SMA, N	1.15:1 from DC to 4 GHz 1.25:1 from 4 to 12.4 GHz 1.35:1 from 12.4 to 18 GHz	1.4" x 0.9" Dia. 36 x 23 Dia. mm	2.0 oz. 57 g	Stainless Steel
10-T	10 W	SMA, BNC, 7/16 DIN, N, TNC, MD	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	2.6" x 2.3" Dia. 67 x 59 Dia. mm	3 oz. 86 g	Black Anodized Aluminum
10-NT	10 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.15:1 from 1 to 3 GHz	2.2" x 2.3" Dia. 56 x 59 Dia. mm	5.9oz. 168 g	
10-18T	10 W	SMA, N	1.15:1 from DC to 4 GHz 1.25:1 from 4 to 12.4 GHz 1.35:1 from 12.4 to 18 GHz	1.7" x 1.0" Dia. 44 x 26 Dia. mm	2.0 oz. 57 g	
25-T	25 W	SMA, BNC, 7/16 DIN, N, TNC, MD	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	5.3" x 2.3" Dia. 135 x 59 Dia. mm	7 oz. 199 g	
25-NT	25 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	4.9" x 2.3" Dia. 125 x 59 Dia. mm	7 oz. 199 g	
25-6T	25 W	SMA, N	1.20:1 from DC to 6 GHz	3.5" x 2.3" x 2.3" 89 x 59 x 59 mm	14.0 oz. 397 g	
25-18T	25 W	SMA, N	1.20:1 from DC to 6 GHz 1.30:1 from 6 to 12.4 GHz 1.40:1 from 12.4 to 18 GHz	3.5" x 2.3" x 2.3" 89 x 59 x 59 mm	14.0 oz. 397 g	

**1500 W models require 115/230V AC power

Convection Cooled Loads



CONVECTION COOLED LOAD PART NUMBER DEFINITION

POWER RATING (WATTS)	PRODUCT TYPE	CONNECTOR GENDER	CONNECTORS*
See chart below for models	T, WT – Convection-cooled CT – Conduction-cooled ST – Square Convection Cooled	F – Female M – Male	A – SMA B – BNC E – IEC 7/16 N – N T – TNC MD – Mini DIN-IEC 4.1/9.5

*Call for custom connector options not shown in this catalog

	Power Rating	Connector	VSWR & Frequency Range	Dimensions (LxWxH)	Weight	Finish
50-T	50 W	SMA, BNC, 7/16 DIN, N, TNC, MD	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	5.3" x 2.3" Dia. 135 x 59 Dia. mm	1.3 lbs. 590 g	Black Anodized Aluminum
50-NT	50 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.15:1 from 1 to 3 GHz	5.3" x 2.3" Dia. 135 x 59 Dia. mm	1.2 lbs. 545 g	
50-6T	50 W	N	1.20:1 from DC to 6 GHz	4.0" x 3.0" x 3.0" 102 x 77 x 77 mm	1.6 lbs. 726 g	
50-18T	50 W	N	1.25:1 from DC to 6 GHz 1.35:1 from 6 to 12.4 GHz 1.45:1 from 12.4 to 18 GHz	4.0" x 3.0" x 3.0" 102 x 77 x 77 mm	1.6 lbs. 726 g	
75-T	75 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.20:1 from 1 to 3 GHz	7.2" x 2.3" Dia. 183 x 59 Dia. mm	1.5 lbs. 682 g	
100-T	100 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	6.8" x 6.4" x 2.6" 173 x 163 x 67 mm	3.6 lbs. 1.6 kg	
100-ST	100 W	BNC, 7/16 DIN, N, TNC, MD	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	7.4" x 2.8" x 2.8" 188 x 72 x 72 mm	2.7 lbs. 1.2 kg	
100-NST	100 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.20:1 from 1 to 3 GHz	7.3" x 2.8" x 2.8" 186 x 72 x 72 mm	2.7 lbs. 1.2 kg	
100-6T	100 W	N	1.20:1 from DC to 2 GHz 1.30:1 from 2 to 4 GHz 1.40:1 from 4 to 6 GHz	5.5" x 3.5" x 3.8" 140 x 89 x 97 mm	2.2 lbs. 1.0 kg	
150-T	150 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3.0 GHz	6.8" x 11.5" x 2.6" 173 x 293 x 67 mm	6.0 lbs. 2.8 kg	
150-ST	150 W	BNC, 7/16 DIN, N, TNC, MD	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3.0 GHz	8.1" x 4.0" x 4.0" 206 x 102 x 102 mm	5.0 lbs. 2.3 kg	
150-WT	150 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	4.9" x 5.4" x 4.8" 125 x 138 x 122 mm	2.5 lbs. 1.2 kg	
300-T	300 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	7.4" x 5.4" x 10.9" 188 x 138 x 277 mm	11.5 lbs. 5.3 kg	
300-WT	300 W	BNC, 7/16 DIN, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	8.2" x 5.4" x 4.8" 209 x 138 x 122 mm	4.7 lbs. 2.2 kg	
500-WT	500 W	7/16 DIN, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	11.0" x 5.4" x 4.8" 280 x 138 x 122 mm	7.8 lbs. 3.6 kg	
600-T	600 W	7/16 DIN, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	12.4" x 9.6" x 7.4" 315 x 244 x 188 mm	21.5 lbs. 9.8 kg	
1000-T	1000 W	7/16 DIN, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	12.3" x 9.6" x 12.8" 313 x 244 x 326 mm	26.5 lbs. 12.0 kg	
1000-WT	1000 W	7/16 DIN, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	18.5" x 10.6" x 4.8" 470 x 270 x 122 mm	26.5 lbs. 12.0 kg	
1500-WT**	1500 W	7/16 DIN, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	20" x 10.6" x 6.0" 508 x 270 x 152 mm	30.0 lbs. 13.6 kg	

**1500 W Models require 115/230V AC Power

Conduction Cooled Loads



- Ultra compact, lightweight design
- Economical design
- Fully shielded against production of extraneous radiation
- Load requires no AC power
- 750, 1500, and 2500 W models rated for 13dB Peak Power

Coolant Method	Dry, Conduction Cooled	Max Flange Temp for Full Rated Power	-40°C to 40°C
Impedance	50 Ohm	AC Power	None
Operating Position	Any	Humidity	95% non-condensing
PIM	-110 dBc Min.		

	Power Rating	Connector	VSWR & Frequency Range	Dimensions (LxWxH)	Weight	Finish
25-CT	25 W	SMA	1.15:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	0.9" x 1.0" x 0.5" (23 x 26 x 13 mm)	0.4 oz 12 g	Tri-alloy
50-CT	50 W	SMA	1.15:1 from DC to 3 GHz 1.25:1 from 3 to 6 GHz	0.8" x 0.9" x 0.4" (21 x 23 x 11 mm)	1.1 oz 32 g	
100-CT	100 W	SMA	1.15:1 from DC to 2 GHz 1.25:1 from 2 to 3 GHz	1.4" x 1.4" x 0.6" (36 x 36 x 16 mm)	1.0 oz 30 g	
150-CT	150 W	N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	1.9" x 1.2" x 1.1" (49 x 31 x 28 mm)	2.2 oz 63 g	
		SMA	1.15:1 from DC to 2 GHz 1.25:1 from 2 to 3 GHz	2.1" x 2.1" x 0.6" (54 x 54 x 16 mm)		
151-CT	150 W	N	1.10:1 from DC to 1 GHz	2.0" x 2.0" x 1.1"	2.2 oz. 63 g	
			1.25:1 from 1 to 4 GHz	(51 x 51 x 28 mm)		
250-CT	250 W	BNC, N, TNC	1.10:1 from DC to 1 GHz	2.5" x 2.2" x 1.1"	5.2 oz. 148 g	
			1.25:1 from 1 to 2.4 GHz	(64 x 56 x 28 mm)		
		SMA	1.15:1 from DC to 2 GHz 1.25:1 from 2 to 3 GHz	2.1" x 2.1" x 0.6" (54 x 54 x 16 mm)		
300-CT	300 W	BNC, N, TNC, 7/16 DIN	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	4.8" x 2.0" x 1.2" (122 x 51 x 31 mm)	12 oz. 340 g	
500-CT	500 W	SMA, BNC, N, TNC, 7/16 DIN	1.10:1 from DC to 1 GHz 1.30:1 from 1 to 3 GHz	2.7" x 2.0" x 1.2" (69 x 51 x 31 mm)	8.2 oz. 233 g	
750-CT	750 W	7/16 DIN	1.2:1 from DC - 250 MHz 1.3:1 from 250 - 1000 MHz	5.4" x 3.0" x 1.5" (138 x 78 x 38 mm)	2.3 lbs 1.1 kg	Al / Cu
1500-CT	1500 W	7/16 DIN	1.2:1 from DC - 250 MHz 1.3:1 from 250 - 1000 MHz	8.1" x 3.0" x 1.5" (208 x 78 x 38 mm)	3.5 lbs 1.6 kg	
2500-CT	2500 W	7/16 DIN	1.2:1 from DC - 250 MHz 1.3:1 from 250 - 1000 MHz	9.4" x 3.0" x 1.5" (240 x 78 x 38 mm)	4.2 lbs 2.0 kg	

Oil Loads



- Wide range of available RF input connectors
- Compact design
- Capable of up to 10 dB peak to average power ratios
- Broadband operation
- Self-contained cooling system that includes cooling fans for higher power models

Altitude	1520 m (5000 ft.)	Finish	Gray Powder Coat
Humidity	95% noncondensing max	Load Coolant	8135, 8201, 8251: Refined Mineral Oil All Others: Silicone Oil
Impedance	50 Ohms Nominal	CE	EMC EN 61326-1:2006 (units w/blowers) and Safety EN 61010-1:2001 (all units)
Ambient Temperature Range	-40°C to +45°C		
Operating Position	Vertical Only		

	Power Rating	Frequency Range/VSWR	Cooling Method	Connector	Dimensions	Weight
8135	150 W	DC to 1 GHz at 1.1:1 max 1 to 2 GHz at 1.2:1 max 2.5 to 4 GHz at 1.3:1 max	Convection	QC - N(f)	9.6" x 6.5" x 4" 242mm x 164mm x 102mm	6.0 lbs. 2.7 kg
8141	250 W	DC to 1 GHz at 1.1:1 max 1 to 1.8 GHz at 1.2:1 max 1.8 to 2.5 GHz at 1.3:1 max	Convection	QC - N(f)	9.6" x 8.5" x 6" 243mm x 216mm x 151mm	10 lbs. 4.5 kg
8201	500 W	DC to 1 GHz at 1.1:1 max 1 to 2.5 GHz at 1.25:1 max	Convection	QC - N(f)	16.8" x 8.5" x 6" 427mm x 216mm x 151mm	20 lbs. 9.1 kg
8401	600 W	DC to 1 GHz at 1.1:1 max 1 to 2.8 GHz at 1.2:1 max 2.8 to 3 GHz at 1.3:1 max	Convection	QC - N(f)	16.2" x 8.5" x 6" 408mm x 216mm x 151mm	20 lbs. 9.1 kg
8251	1000 W	DC to 1 GHz at 1.1:1 max 1 to 2 GHz at 1.25:1 max 2 to 2.4 GHz at 1.3:1 max	Convection	QC - LC(f)	17.9" x 8.5" x 6" 455mm x 216mm x 151mm	25 lbs. 11.5 kg
8860 8861 8862 8863 8864	1500 W	DC to 1 GHz at 1.1:1 max 1 to 2 GHz at 1.25:1 max	Convection	QC - LC(f) 1-5/8 EIA Unflg 1-5/8 EIA Flg 3-1/8 EIA Unflg 3-1/8 EIA Flg	19.5" x 7.5" x 13.2" 496mm x 184mm x 334mm	32 lbs. 14.5 kg
8890-300 8891-300 8892-300 8895-300	2500 W		Convection	QC - LC(f) 3-1/8 EIA Flg 1-5/8 EIA Flg 1-5/8 EIA Unflg	25.2" x 7" x 17.2" 638mm x 178mm x 437mm	59 lbs. 27 kg
8890-315 8890-320 8891-315 8891-320 8892-315 8892-320 8895-315 8895-320 8897-315 8897-320	5000 W	DC to 1 GHz at 1.1:1 max 1 to 2 GHz at 1.25:1 max 2 to 2.4 GHz at 1.3 max	115 VAC Fan 230 VAC Fan 115 VAC Fan 230 VAC Fan 115 VAC Fan 230 VAC Fan 115 VAC Fan 230 VAC Fan	QC - LC(f) QC - LC(f) 3-1/8 EIA Flg 1-5/8 EIA Flg 1-5/8 EIA Unflg	25.2" x 7.4" x 22.7" 638mm x 187mm x 560mm	73 lbs. 33 kg
8921 8922 8926 8927	5000 W	DC to 1 GHz at 1.1:1 max	Convection	QC - LC(f) 1-5/8 EIA Flg 3-1/8 EIA Flg 3-1/8 EIA Unflg	32.8" x 9.5" x 26.9" 832mm x 241mm x 681mm	126 lbs. 57 kg
8931-115 8931-230 8932-115 8932-230 8936-115 8936-230 8937-115 8937-230	10000 W	DC to 400 MHz at 1.15:1 max, 400 MHz to 1 GHz at 1.2:1 max	115 VAC Fan 230 VAC Fan 115 VAC Fan 230 VAC Fan 115 VAC Fan 230 VAC Fan	QC - LC(f) QC - LC(f) 1-5/8 EIA Flg 1-5/8 EIA Flg 3-1/8 EIA Flg 3-1/8 EIA Unflg	32.8" x 9.5" x 33.4" 832mm x 241mm x 847mm	142 lbs. 65 kg

Market-Specific Oil Loads



- Compact design
- Tuned for optimal performance over target frequency ranges
- Capable of up to 10 dB peak to average power ratios
- Self-contained cooling system that includes fans for higher power levels
- Wide range of available RF input connectors

Impedance	50 Ohm
Altitude	5000 ft (1520 m)
Humidity	95% noncondensing max
Ambient Temperature Range	Digital Broadcast Loads: -40° to 113° F (-40° to 45° C) Semiconductor Precision Loads: 41° to 104° F (5° to 40° C)

Storage Temperature	-40° to 113° F (-40° to 45° C)
Operating Position	None
Load Coolant	Silicone Oil
Finish	Digital Broadcast Loads: Gray Powder Coat Semiconductor Precision Loads: Black Powder Coat

DIGITAL BROADCAST OIL LOADS

	Power Rating	Frequency Range/VSWR	Cooling Method	Connector	Dimensions	Weight	
8251D	1 kW	470-860 MHz at 1.065:1 VSWR Max	Convection	1-5/8 EIA Flg	17.9" x 8.5" x 6"	25 lbs.	
8251D7-16	1 kW			QC-DIN(F)	(455 mm x 216 mm x 151 mm)	11.5 kg	
8862D	1.5 kW			1-5/8 EIA Flg	19.5" x 7.5" x 13.2" (496 mm x 184 mm x 334 mm)	32 lbs. 14.5 kg	
8862D13-30	1.5 kW			13-30 IEC (M)			
8864D	1.5 kW			3-1/8 EIA Flg	25.2" x 7" x 17.2" (638 mm x 178 mm x 437 mm)	59 lbs. 27 kg	
8891D300	2.5 kW			3-1/8 EIA Flg			
8892D13-30	2.5 kW			13-30 IEC (M)			
8892D300	2.5 kW			1-5/8 EIA Flg	230 VAC Fan	1-5/8 EIA Flg	73 lbs. 33 kg
8892D320	5 kW						
8922D	5 kW			Convection	115 VAC Fan	1-5/8 EIA Flg	32.8" x 9.5" x 26.9" (832 mm x 241 mm x 681 mm)
8926D	5 kW	3-1/8 EIA Flg					
8927D	5 kW	3-1/8 EIA Flg					
8936D115	10 kW	470-860 MHz at 1.15:1 VSWR Max	115 VAC Fan	3-1/8 EIA Flg	32.8" x 9.5" x 33.4" (832 mm x 241 mm x 847 mm)	142 lbs. 65 kg	
8936D230	10 kW		230 VAC Fan	3-1/8 EIA Flg			

SEMICONDUCTOR PRECISION OIL LOADS

	Power Rating	Frequency Range/VSWR	Cooling Method	Connector	Dimensions	Weight	
8865SC13	1 kW	DC to 28 MHz at 1.10:1 VSWR max	Convection	QC-LC(F)	19.5" x 7.5" x 13.2" (496 mm x 184 mm x 334 mm)	32 lbs. 14.5 kg	
8890-300SC13	2.5 kW				25.2" x 7" x 17.2" (638 mm x 178 mm x 437 mm)	59 lbs. 27 kg	
8921SC13	5 kW				32.8" x 9.5" x 26.9" (832 mm x 241 mm x 681 mm)	126 lbs. 57 kg	
8931-115SC13	10 kW				115 VAC Fan	32.8" x 9.5" x 33.4" (832 mm x 241 mm x 847 mm)	142 lbs. 65 kg
8931-230SC13	10 kW				230 VAC Fan		
8941-115SC13	15 kW				115 VAC Fan	43" x 9.5" x 33.4" (1092 mm x 241 mm x 847 mm)	236 lbs. 107 kg
8941-230SC13	15 kW				230 VAC Fan		

Econoloads

- Econoloads are the smallest load design for the power dissipated
- Utilizing an external water supply, the Econoloads have no input power requirements
- Surface cool to the touch
- May be mounted in any orientation
- Standard EIA RF connections and NPT Water connections



Impedance 50 Ohm

Finish 5 kW - Bright Nickel Plate
10kW - 80 kW - Black Powder Coat

Load Coolant Potable Water

Operating Position Any

Waterlines 5 kW, 8720 - 1/4" FPT
5 kW, 8726 - 3/4" Hose
10kW - 80 kW - 3/4" Hose

Water Inlet Temp. 5 kW - 5°C to 80°C
10kW - 80 kW - 5°C to 60°C

	Power Rating	Frequency Range/VSWR	Connector	Flow Rate	Dimensions	Weight
8720	5 kW	DC to 500 MHz at 1.1:1 max 500 to 900 MHz at 1.15:1 max 900 to 2000 MHz at 1.25:1 max	1-5/8" EIA Flg	1 GPM (4 LPM) @ 5°C to 4 GPM (15 LPM) @ 80°C	8.1" x 3.5" Dia. 204 mm x 89 mm Dia.	2 lbs. 2 oz. 964 g
8726	5 kW	DC to 500 MHz at 1.1:1 max 500 to 2000 MHz at 1.25:1 max	QC - LC(f)		10.5" x 1.7" Dia. 265 mm x 43 mm Dia.	2 lbs. 8 oz. 1.1 kg
8730A	10 kW	DC to 1 GHz at 1.1:1 max	1-5/8" EIA Flg		16.0" x 4.4" Dia. 406 mm x 111 mm Dia.	8 lbs. 3.6 kg
8731	10 kW	1 kHz to 1 GHz at 1.1:1 max	3-1/8" EIA Flg	4 GPM (15 LPM) @ 5°C to 6 GPM (23 LPM) @ 60°C	14.7" x 5.2" Dia. 372 mm x 132 mm Dia.	6 lbs. 4 oz. 2.9 kg
8738A	10 kW	1 kHz to 1 GHz at 1.1:1 max	3-1/8" EIA Unflg		16.0" x 4.4" Dia. 406 mm x 111 mm Dia.	6 lbs. 2.8 kg
8745	20 kW	1 kHz to 900 MHz at 1.1:1 max	3-1/8" EIA Flg	6 GPM (23 LPM) @ 5°C to 8 GPM (30 LPM) @ 60°C	19.5" x 5.2" Dia. 495 mm x 132 mm Dia.	15 lbs. 13 oz. 7.2 kg
8746	20 kW		3-1/8" EIA Unflg			15 lbs. 5 oz. 7.0 kg
8755	30 kW		3-1/8" EIA Flg	7 GPM (26 LPM) @ 5°C to 9 GPM (34 LPM) @ 60°C		15 lbs. 13 oz. 7.2 kg
8756	30 kW		3-1/8" EIA Unflg			15 lbs. 5 oz. 7.0 kg
8765	40 kW		3-1/8" EIA Flg	8 GPM (30 LPM) @ 5°C to 10 GPM (38 LPM) @ 60°C		15 lbs. 13 oz. 7.2 kg
8775	50 kW		3-1/8" EIA Flg	9 GPM (34 LPM) @ 5°C to 11 GPM (42 LPM) @ 60°C		15 lbs. 13 oz. 7.2 kg
8776	50 kW		3-1/8" EIA Unflg			15 lbs. 5 oz. 7.0 kg
8792	80kW		1 kHz to 800 MHz at 1.15:1 max	6-1/8" EIA Flg		9 GPM (34 LPM) @ 5°C to 12 GPM (46 LPM) @ 60°C

Digital Air Loads

DA Series

- Self-contained and convenient means of dissipating large amounts analog, digital, and combined signals
- Excellent VSWR performance with <1.05:1 typical VSWR (1.1:1 max) across rated frequency range
- Handles >13 dB Peak to Average power ratio
- Ductable exhaust and cool-to-the-touch exterior surfaces
- Double shielded against the production of extraneous radiation

VHF

Impedance	50 ohm nominal
VSWR (DC-240 MHz)	1.05:1 typical, 1.10:1 maximum
Cooling Method	Forced air-cooled
Peak to Average Power	>10 dB
Ambient Temperature	-40°C to +45°C (-40°F to +113°F)
Interlock Contact Rating	10 A @ 120 VAC, 5 A @ 250 VAC
Finish	Blue Powder Coat
AC Power Required	115 V/230 V 50/60 Hz
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001

UHF

Impedance	50 ohm nominal
VSWR (470-890 MHz)	1.05:1 typical, 1.10:1 maximum
Cooling Method	Forced air-cooled
Peak to Average Power	>10 dB*
Ambient Temperature	-40°C to +45°C (-40°F to +113°F)
Interlock Contact Rating	10 A @ 120 VAC, 5 A @ 250 VAC
Finish	Blue Powder Coat
AC Power Required	115 V/230 V 50/60 Hz
CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001

*DA40 Peak to Average is 14 dB



Digital Air Loads

DA Series

	Connector	AC Power	Power Rating	Frequency Range	Dimensions (L x W x H)	Weight
DA10V1F15	1 5/8" Flanged	115 VAC	10 kW	0-240 MHz-AM, FM, VHF	23.5" x 23.5" x 59" 597 mm x 597 mm x 1499 mm	130 lbs. 58.97 kg
DA10V1U15	1 5/8" Unflanged					
DA10V1F30	1 5/8" Flanged	230 VAC				
DA10V1U30	1 5/8" Unflanged					
DA10V3F15	3 1/8" Flanged	115 VAC	10 kW	0-240 MHz-AM, FM, VHF	23.5" x 23.5" x 59" 597 mm x 597 mm x 1499 mm	130 lbs. 58.97 kg
DA10V3U15	3 1/8" Unflanged					
DA10V3F30	3 1/8" Flanged	230 VAC				
DA10V3U30	3 1/8" Unflanged					
DA25V3F15	3 1/8" Flanged	115 VAC	25 kW	0-240 MHz-AM, FM, VHF	27" x 27" x 61" 686 mm x 686 mm x 1549 mm	160 lbs. 72.57 kg
DA25V3U15	3 1/8" Unflanged					
DA25V3F30	3 1/8" Flanged	230 VAC				
DA25V3U30	3 1/8" Unflanged					
DA25V4U15	4 1/2" Unflanged	115 VAC	25 kW	0-240 MHz-AM, FM, VHF	27" x 27" x 61" 686 mm x 686 mm x 1549 mm	160 lbs. 72.57 kg
DA25V4U30	4 1/2" Unflanged	230 VAC				
DA5F15	3 1/8" Flanged	115 VAC	5 kW	470-890 MHz UHF	17" x 17" x 64" 495 mm x 495 mm x 1740 mm	100 lbs. 45.5 kg
DA5U15	3 1/8" Unflanged					
DA5F30	3 1/8" Flanged	230 VAC				
DA5U30	3 1/8" Unflanged					
DA10F15	3 1/8" Flanged	115 VAC	10 kW	470-890 MHz UHF	19.5" x 19.5" x 68.5" 432 mm x 432 mm x 1608 mm	130 lbs. 58.97 kg
DA10U15	3 1/8" Unflanged					
DA10F30	3 1/8" Flanged	230 VAC				
DA10U30	3 1/8" Unflanged					
DA15F15	3 1/8" Flanged	115 VAC	15 kW	470-890 MHz UHF	25" x 25" x 76.5" 635 mm x 635 mm x 1943 mm	192 lbs. 87.09 kg
DA15U15	3 1/8" Unflanged					
DA15F30	3 1/8" Flanged	230 VAC				
DA15U30	3 1/8" Unflanged					
DA25F15	4 1/16" Myat Flanged	115 VAC	25 kW	470-890 MHz UHF	27" x 27" x 76.5" 686 mm x 686 mm x 1943 mm	245 lbs. 111.13 kg
DA25U15	4 1/16" Myat Unflanged					
DA25F30	4 1/16" Myat Flanged	230 VAC				
DA25U30	4 1/16" Myat Unflanged					
DA25-4U15	4 1/2" IEC Unflanged	115 VAC	40 kW	470-890 MHz UHF	27.5" x 27.5" x 84" 701 mm x 701 mm x 2134 mm	310 lbs. 140.6 kg
DA25-4U30	4 1/2" IEC Unflanged	230 VAC				
DA40-5U15	4 7/8" IEC Unflanged	115 VAC				
DA40-5U30	4 7/8" IEC Unflanged	230 VAC				
DA40F15	6 1/8" IEC Flanged	115 VAC	40 kW	470-890 MHz UHF	27.5" x 27.5" x 84" 701 mm x 701 mm x 2134 mm	310 lbs. 140.6 kg
DA40F30	6 1/8" IEC Flanged	230 VAC				
DA40U30	6 1/8" IEC Unflanged	230 VAC				

Other models available, please consult factory.

Moduloads



- Forced-air heat exchanger cooled load for high-power applications up to 900 MHz
- High power RF dissipation with 10, 25 and 50 kW versions are available
- Available in models to work with 115 or 230 volts at 50 or 60 Hz
- Compact, low-profile design saves space in crowded transmitter sites
- Interlock control circuit provides fail-safe protection of the transmitter

Frequency Range	10kW - 1 kHz to 1000 MHz at 1.1:1 max 25 kW & 50 kW - 1 kHz to 900 MHz at 1.1:1 max	Operating Position	Horizontal Only
Finish	Gray Powder Coat	CE	EMC EN 61326-1:2006 and Safety EN 61010-1:2001
Load Coolant	100 % Water 35% Ethylene Glycol / 65% Water		

	Input Power	[Power Rating] Operating Temperature	Connector	Dimensions (Lx- WxH)	Weight
8631B115	9.5 A @ 115V, 60Hz	[10 kW] 100% Water: +5°C to +45°C, 35% Ethylene Glycol / 65% Water: -20°C to +35°C	3-1/8" EIA Flg	24.6" x 15.9" x 17.5" 623 mm x 402 mm x 443 mm	113 lbs. 50.9 kg
8631B230	4.75A @ 230V, 50Hz				
8631B230-6	4.75A @ 230V, 60Hz				
8635B115	9.5 A @ 115V, 60Hz		1-5/8" EIA Flg		
8635B230	4.75A @ 230V, 50Hz				
8638B115	9.5 A @ 115V, 60Hz		3-1/8" EIA Unflg		
8638B230	4.75A @ 230V, 50Hz				
8638B230-6	4.75A @ 230V, 60Hz				
8645B115	11 A @ 115V, 60Hz	[25 kW] 100% Water: +5°C to +30°C, 35% Ethylene Glycol / 65% Water: -20°C to +25°C	3-1/8" EIA Flg	28.5" x 19.6" x 20.9" 723 mm x 497 mm x 528 mm	155 lbs. 70 kg
8645B230	5.5 A @ 230V, 50Hz				
8645B230-6	5.5 A @ 230V, 60Hz				
8646B115	11 A @ 115V, 60Hz	[20 kW] 100% Water: +5°C to +45°C, 35% Ethylene Glycol / 65% Water: -20°C to +35°C	3-1/8" EIA Unflg		
8646B230	5.5 A @ 230V, 50Hz				
8646B230-6	5.5 A @ 230V, 60Hz				
8655B115-6	15 A @ 115V, 60Hz	[50kW] 100% Water: +5°C to +35°C, 35% Ethylene Glycol / 65% Water: -20°C to +25°C	3-1/8" EIA Flg	53" x 19.6" x 20.9" 1347 mm x 497 mm x 528 mm	275 lbs. 125 kg
8655B230-5	8 A @ 230V, 50Hz				
8655B230-6	8 A @ 230V, 60Hz				
8656B115-6	15 A @ 115V, 60Hz	[40kW] 100% Water: +5°C to +45°C, 35% Ethylene Glycol / 65% Water: -20°C to +35°C	3-1/8" EIA Unflg		
8656B230-5	8 A @ 230V, 50Hz				
8656B230-6	8 A @ 230V, 60Hz				

Oil Convection Cooled Attenuators



- Self cooling design
- Broadband operation
- Rugged construction
- Fully shielded against production of extraneous radiation
- Other Attenuation values available upon request

LOADS & ATTENUATORS

Coolant Method Oil, Convection Cooled
Impedance 50 Ohm
Operating Position Horizontal Only

Ambient Temperature -40°C to 45°C
Humidity 95% non-condensing
Standard Attenuation Value 30 dB


	Power Rating	Connector	VSWR & Frequency Range	Cooling Method	Dimensions (LxWxH)	Weight
8325	500 W	QC - N(f) Input; QC - N(f) Output	DC to 500 MHz at 1.1:1 max	Convection	17.5" x 6.0" x 8.5" 445mm x 151mm x 216mm	25 lbs. 11.0 kg
8327-300	1000 W	QC - LC(f) Input; QC - N(f) Output			24.0" x 7.2" x 17.2" 596mm x 181mm x 437mm	57 lbs. 26.0 kg
8329-300	2000W	QC - LC(f) Input; QC - N(f) Output			24.0" x 7.2" x 17.2" 596mm x 181mm x 437mm	
8329-300 w/ BA-300-115	4000 W	QC - LC(f) Input; QC - N(f) Output		Forced Convection, 115 VAC Fan	23.5" x 7.2" x 22.1" 596mm x 181mm x 560mm	70.5 lbs. 32 kg
8329-300 w/ BA-300-230	4000 W			Forced Convection, 230 VAC Fan		

OPTIONAL ACCESSORIES

Interlock Thermoswitch 2450-056 (8327 Models only)
 Interlock Thermoswitch 8329-028 (8329 Models only)



Convection Cooled Attenuators

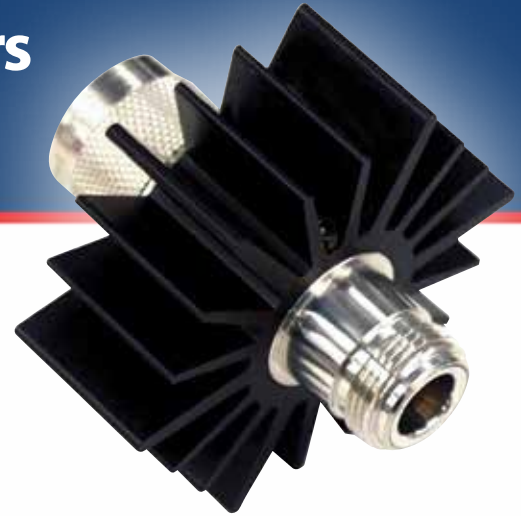

- Self cooling design, needs no cooling plate
- Frequencies up to 18 GHz
- Fully shielded against production of extraneous radiation
- Attenuator requires no AC power
- Rugged construction
- Broadband operation
- Other attenuation values available upon request
- Models to cover all LTE frequencies

Coolant Method	Dry, Convection Cooled
Impedance	50 Ohm
Operating Position	Any
Ambient Temperature	-40°C to 40°C
PIM	-110 dBc Min.

AC Power	None**
Humidity	95% non-condensing
Standard Attenuation Values	3, 6, 10, 20, 30 dB

	Power Rating	Connector	VSWR & Frequency Range	Dimensions (LxWxH)	Weight	Finish
2-A	2 W	BNC, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	2.4" x 0.8" Dia. 61 x 21 Dia. mm	3.1 oz. 88 g	Tri-Alloy
2-A	2 W	SMA	1.15:1 from DC to 2.5 GHz 1.30:1 from 2.5 to 6 GHz	0.9" x 0.4" Dia. 23 x 11 Dia. mm	1.2 oz. 34 g	Stainless Steel
2-6A	2 W	N	1.25:1 from DC to 6 GHz	1.8" x 0.9" Dia. 46 x 23 Dia. mm	2.5 oz. 71 g	
2-18A	2 W	SMA, N	1.15:1 from DC to 4 GHz 1.20:1 from 4 to 8 GHz 1.25:1 from 8 to 12.4 GHz 1.35:1 from 12.44 to 18 GHz	1.8" x 0.9" Dia. 46 x 23 Dia. mm	2.5 oz. 71 g	
3-A	3 W	BNC, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	1.5" x 0.6" Dia. 39 x 16 Dia. mm	3.1 oz. 88 g	Tri-Alloy
5-A	5 W	BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	2.6" x 0.8" Dia. 67 x 21 Dia. mm	3.1 oz. 88 g	Stainless Steel
5-6A	5 W	N	1.25:1 from DC to 6 GHz	2.4" x 0.9" Dia. 61 x 23 Dia. mm	3.0 oz. 86 g	
5-18A	5 W	SMA, N	1.15:1 from DC to 4 GHz 1.25:1 from 4 to 12.4 GHz 1.35:1 from 12.4 to 18 GHz	2.5" x 0.9" Dia. 64 x 23 Dia. mm	3.5 oz. 100 g	
10-A	10 W	SMA, BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	2.8" x 2.3" Dia. 72 x 59 Dia. mm	5.0 oz. 142 g	Black Anodized Aluminum
10-6A	10 W	SMA, N	1.20:1 from DC to 4 GHz 1.30:1 from 4 to 6 GHz	2.5" x 1.1" Dia. 64 x 28 Dia. mm	3.5 oz. 100 g	Stainless Steel
10-18A	10 W	N	1.20:1 from DC to 4 GHz 1.30:1 from 4 to 12.4 GHz 1.45:1 from 12.4 to 18 GHz	2.5" x 0.9" Dia. 64 x 23 Dia. mm	3.5 oz. 100 g	
25-A	25 W	SMA, BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 4 GHz	5.3" x 2.3" Dia. 135 x 59 Dia. mm	9.0 oz. 256 g	
25-6A	25 W	N	1.20:1 from DC to 6 GHz	4.2" x 2.3" x 2.3" 107 x 59 x 59 mm	13.5 oz. 383 g	Stainless Steel
25-18A	25 W	N	1.20:1 from DC to 4 GHz 1.30:1 from 4 to 12.4 GHz 1.40:1 from 12.4 to 18 GHz	4.2" x 2.3" x 2.3" 107 x 59 x 59 mm	13.5 oz. 383 g	

**1500 W models require 115/230V AC power

Convection Cooled Attenuators



CONVECTION COOLED ATTENUATOR PART NUMBER DEFINITION

POWER RATING (WATTS)	PRODUCT TYPE	CONNECTOR GENDER	CONNECTORS*	ATTENUATION VALUE (in dB)
See chart below for models	A, SA, WA – Attenuator	M/F – Male/Female F/F – Female/ Female	A - SMA B - BNC N - N T - TNC	03 – 3 dB 06 – 6 dB 10 – 10 dB 20 – 20 dB 30 – 30 dB

*Call for custom connector options not shown in this catalog

Power Rating	Connector	VSWR & Frequency Range	Dimensions (LxWxH)	Weight	Finish	
50-A	50 W	SMA, BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	6.4" x 2.3" Dia. 163 x 59 Dia. mm	1.0 lbs. 454 g	Black Anodized Aluminum
50-6A	50 W	N	1.20:1 from DC to 6 GHz	4.7" x 3.0" x 3.0" 120 x 77 x 77 mm	1.7 lbs. 772 g	Stainless Steel
50-18A	50 W	N	1.25:1 from DC to 6 GHz 1.35:1 from 6 to 12.4 GHz 1.45:1 from 12.4 to 18 GHz	4.7" x 3.0" x 3.0" 120 x 77 x 77 mm	1.7 lbs. 772 g	Stainless Steel
75-A	75 W	SMA, BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3.0 GHz	7.3" x 2.3" Dia. 186 x 59 Dia. mm	1.6 lbs. 726 g	Black Anodized Aluminum
100-A	100 W	SMA, BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	7.3" x 2.6" x 6.4" 186 x 67 x 163 mm	3.6 lbs.	Black Anodized Aluminum
100-6A	100 W	N	1.20:1 from DC to 2 GHz 1.35:1 from 2 to 4 GHz 1.40:1 from 4 to 6 GHz	6.4" x 2.7" x 3.8" 163 x 69 x 97 mm	2.4 lbs. 1.7 kg	Stainless Steel
100-SA	100 W	BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	8.4" x 2.8" x 2.8" 214 x 72 x 72 mm	3.0 lbs. 1.4 kg	Black Anodized Aluminum
150-A	150 W	BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 3 GHz	6.7" x 2.6" x 11.9" 171 x 67 x 303 mm	6.6 lbs. 3.0 kg	
150-SA	150 W	SMA, BNC, N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	9.1" x 4.0" x 5.0" 232 x 102 x 127 mm	5.5 lbs. 2.5 kg	
150-WA	150 W	BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	5.6" x 5.4" x 4.3" 143 x 138 x 110 mm	2.5 lbs. 1.2 kg	
300-A	300 W	BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	7.3" x 5.4" x 10.9" 186 x 138 x 277 mm	12.0 lbs. 5.5 kg	
300-WA	300 W	BNC, N, TNC	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	9.0" x 5.4" x 4.8" 229 x 138 x 122 mm	4.6 lbs. 2.1 kg	
500-WA	500 W	N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	12.4" x 5.4" x 4.8" 315 x 138 x 122 mm	7.9 lbs. 3.6 kg	
600-A	600 W	N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	12.7" x 9.4" x 9.6" 323 x 239 x 244 mm	21.5 lbs. 9.8 kg	
1000-A*	1000 W	N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	13.6" x 12.8" x 9.6" 346 x 326 x 244 mm	26.5 lbs. 12.0 kg	
1000-WA*	1000 W	N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	19.6" x 10.6" x 4.8" 498 x 270 x 122 mm	26.5 lbs. 12.0 kg	
1500-WA*	1500 W	N	1.10:1 from DC to 1 GHz 1.25:1 from 1 to 2.4 GHz	20.4" x 10.7" x 5.9" 519 x 272 x 150 mm	30.0 lbs. 13.6 kg	

*Note: attenuators 1000 W and above are not available in attenuation values less than 10 dB

Variable RF Signal Samplers

4273 & 4275 Series



- Very low insertion VSWR across the operating frequency range with an insertion loss is less than 0.2 dB
- Available with a wide variety of Quick Change (QC) connectors
- Passive device requiring no external source of power or utility service
- Includes locking devices on the attenuation control knob


ACCESSORIES

	4273	4275
Power Rating	5 kW max	1 kW max
Frequency Range	1.5 - 35 MHz	20 - 1000 MHz
Impedance	50 Ohms (nominal)	
Insertion Loss	with N Connectors 1.07 max	with N Connectors 1.1 max. 2 to 512 MHz, 1.25 max. 512 to 1000 MHz
Coupling	Adjustable as shown within ± 3 dB	
Ambient Temp. Range	-40°C to +45°C	
Connectors	QC Type (Input and Output Ports)	
Finish	Bright silver plate	
Nominal Size	2 51/64" L x 2 7/8" W x 1 1/4" D, (71 mm x 73 mm x 32 mm)	
Weight	10 oz. (280 g)	


POWER CONNECTORS

	"QC" CONNECTOR
4273	None
4273-020	N (Male/Female)
4275	None
4275-020	N (Male/Female)
4275-025	N (Female/Female)

Model 4273

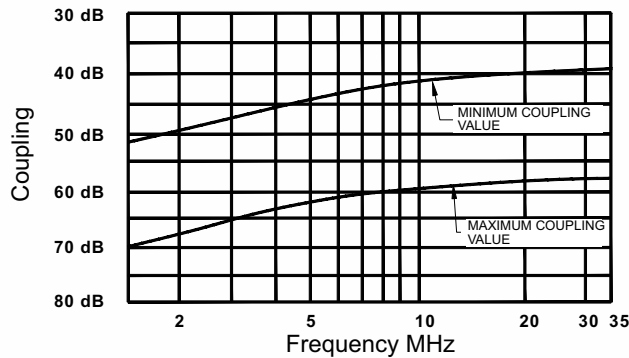

Model 4275

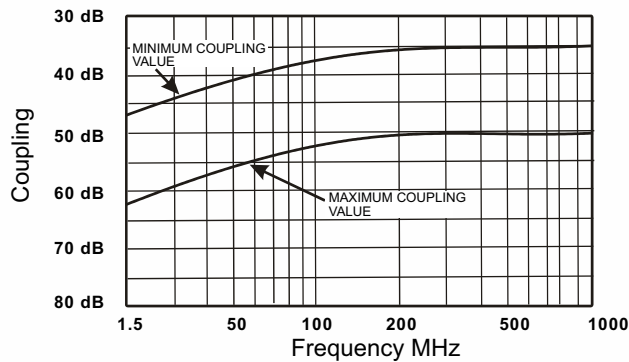

Coaxial Selector Switches

71, 72 R, 74 Series



- Rugged and reliable design which permits positive contact
- Low insertion VSWR and negligible cross talk between channels
- Can't be operated accidentally - must be operated by intentional sequential movement
- Switches may be panel-mounted








Frequency Range	DC to 10 GHz
Maximum RF Voltage	500 volts rms
Attenuation to Unused Channel	75 dB (cross talk)
Ambient Temp.	-60°C to +65°C (-76°F to +149°F)
Weight	Varies by model, approx. 2 1/2 lbs. (1.1 kg)

TYPICAL OPERATING VALUES

Frequency	VSWR	Insertion Loss	Max Rf Power Rating @ 65°C
100 MHz	Negligible	0.02 dB	850 W
1000 MHz	1.06 max.	0.09 dB	200 W
4000 MHz	1.30 max.	0.22 dB	75 W

	7422	7441	7431	74	718	7181	72-2	72R
Positions	2	3	4	6	8	10	2	Reversing
Coaxial Circuits	1	1	1	1	1	1	2	2

QC Connectors



Adapters & Connectors



INTERSERIES ADAPTER KITS MODEL 4240-401

	N (F)	N (M)	BNC (F)	BNC (M)	TNC (F)	TNC (M)	SMA (F)	SMA (M)	UHF (F)
N (F)									
N (M)	.								
BNC (F)	.	.							
BNC (M)	.	.	.						
TNC (F)					
TNC (M)				
SMA (F)			
SMA (M)		
UHF (F)	
UHF (M)

INTERSERIES ADAPTER KITS MODEL 4240-400

	N (F)	N (M)	UHF (F)	UHF (M)	BNC (F)	BNC (M)	TNC (F)
N (F)	.						
N (M)	.	.					
UHF (F)	.	.					
UHF (M)	.	.	.				
BNC (F)			
BNC (M)		
TNC (F)	
TNC (M)

INTERSERIES ADAPTERS

	Description
4240-402	Precision Connector Adapter, AT-Series, N Male
4240-403	Precision Connector Adapter, AT-Series, N Female
4240-404	Precision Connector Adapter, AT-Series, BNC Male
4240-405	Precision Connector Adapter, AT-Series, BNC Female
4240-406	Precision Connector Adapter, AT-Series, TNC Male
4240-407	Precision Connector Adapter, AT-Series, TNC Female
4240-408	Precision Connector Adapter, AT-Series, UHF Male
4240-409	Precision Connector Adapter, AT-Series, UHF Female
4240-410	Precision Connector Adapter, AT-Series, SMA Male
4240-411	Precision Connector Adapter, AT-Series, SMA Female

QC ADAPTERS, CONNECTORS

	Description
4240-165	QC (F) to QC (F)
4240-180	Copl. (M) to QC (F)
4240-194	3 1/8" Flg. to QC (F)
4240-201	7/8" Flg. to QC (F)
4240-244	Rt. Angle QC
4240-260	1 5/8" Flg. to QC (F)

COUPLING KITS

	Description	ohm
4240-220	7/8" Flg.	50
4712-020	1 5/8" Flg.	50
4600-020	3 1/8" Flg.	50
4902-020	6 1/8" Flg.	50

FLANGE-TO-FLANGE ADAPTERS

	Description
4600-025	3 1/8" Flg. To 1 5/8" EIA Flg. 50 ohm
4712-015	1 5/8" Flg. To 7/8" EIA Flg. 50 ohm

Miscellaneous Accessories

DC CABLE ASSEMBLIES

	Connector	Length	Use With Group
3170-058-1	BNC (M)	14"	I
3170-058-3	BNC (M)	25'	I
3170-058-5	BNC (M)	50'	I
3170-058-9	BNC (M)	100'	I
4220-097-1	Spade Lug	12"	II
4220-097-7	Spade Lug	10'	II
4220-097-10	Spade Lug	25'	II
4220-097-17	Spade Lug	50'	II
4220-097-13	Spade Lug	75'	II
4220-097-16	Spade Lug	100'	II
7500-072-1	DC Plug	39 1/2'	III
7500-072-4	DC Plug	10'	III
7500-072-2	DC Plug	25'	III

WATTMETER GROUPS

Group I	3171-020, 3171, 3171A020, 3171A, 3127-055, 3127-080
Group II	3127-035, 3127-075, 3127-040
Group III	4305A, 4909, 4715, 4610, 4723, 4802

WATTMETER BATTERIES

	Use With	Volts	Type	Notes
5A1230	4391A	1.25	NiMH	6 req.
5A1587	4412A	9	NiMH	-
5-1375	4314B, 4410A, 4041, 4410, APM-16	9	Alkaline	-

MISCELLANEOUS

	Use With	Description
3610-031	All Element Sockets	Dummy Plug
5A2229	AT Series	Power Supply 120 V
5A2226	AT Series	Power Supply 230 V
5B2229-156E	4314C	Power Supply 115 V /230 V
7500-076	-	DC Connector



CASES

	Description
CC-6	Portable THRULINE® Wattmeter*, 5 elements, and 1 small load
EC-1	12 elements
4300-061	Model 43 or 43P Wattmeter, load, signal sampler, QC connectors, and 4 elements
4300A085	4391 POWER ANALYST®, signal sampler, and other accessories
4300A055	4410 Wattmeter, 100-ST load, elements and accessories
4300A215	4421 Wattmeter and power sensors
5000-030	Soft Case - AT-500, AT-800 Antenna Testers, 5000-EX
5000-035	Hard Transit Case - 5000-XT or SH-42S or SK-4500 and Sensors
7002C870	Site Analyzer®
7002A225-1	SignalHawk™

*For use with THRULINE® Wattmeter Models: APM-16, 43, 43P, 4304A, 4308, 4314B, 4410A, 4430 and 4431.

Load and Cooling Accessories

THERMOSWITCHES FOR AIR-COOLED LOADS

	Connector	Temp. Set Point	Use With Group
8630-013	Over Temp. Interlock	Opens @ 86°C	8630 Series
8640-066	Over Temp. Interlock	Opens @ 77°C	8640/8650 Series
8890-008	Over Temp. Interlock	Opens @ 236°C	8890/8920 Series
8890-017	Over Temp. Interlock	Opens @ 226°C	8930 Series
8892-333	Blower	Closes @ 60°C	8930 Series

WATER-COOLED ACCESSORIES

	Product	Power
RPK6770A120	Wall Mounting Bracket	10 kW
RPK5-898-6	Water Flow Switch	10 kW
RPK5-898-2	Water Flow Switch	20 kW
RPK5-898-3	Water Flow Switch	30 kW
RPK5-898-4	Water Flow Switch	40 kW
RPK5-898-7	Water Flow Switch	50 kW, 80 kW

REPLACEMENT RESISTORS

	For	Power
8731-031-1	8731 ECONOLOADS	10 kW
RPK8738A072	8730A/8738A ECONOLOADS	10 kW
RPK8755-027-2	8745/8746 ECONOLOADS	20 kW
RPK8755-027-3	8755/8756 ECONOLOADS	30 kW
RPK8755-027-4	8765/8766 ECONOLOADS	40 kW
RPK8755-027-5	8775/8776 ECONOLOADS	50 kW
RPK8792-010-1 one reqd.	8792 ECONOLOADS	80 kW
RPK5A2388	8578A100 Forced-Air Load	10 kW
RPK5A2393	8578A150 Forced-Air Load	15 kW


COOLANTS

	Description	Volume / Pkg.
5-030-3	Refined Mineral Oil	1 Gallon Can
5-1070-2	DC-200 Silicone	1 Gallon Can
5-1134-3	Ethylene Glycol, Industrial Grade	1 Gallon Can

DOLLIES

	Description
6771-011	For 10 and 25 kW MODULOAD
6772B011	For 50 kW MODULOAD

Technical Data

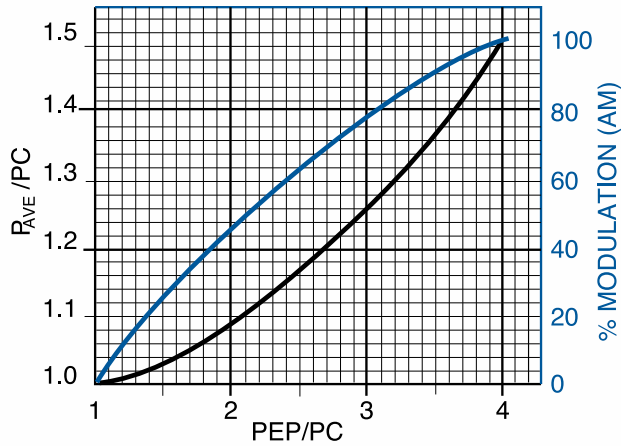

Interpreting readings on peak Wattmeters with Multicarrier, CW, AM, SSB, and pulsed signals.

In the table below, $Z^{\circ} = 50$ ohm, PEP is peak envelope power, and PEV is peak envelope voltage. The PEV of the carrier (or suppressed carrier) C was arbitrarily chosen at 100 volts in all examples, $PEV_{RMS} = \frac{PEV}{1.414}$.

The graph at left shows correlation of peak-envelope-power (PEP), average heating power (P_{AVE}) and % modulation of AM signals for Tables B, C, and D below.

Transmission Type and Scope Pattern	Frequency Spectrum C=Carrier	PEV _{RMS} (arbitrary)	PEP = PEV _{RMS} ² / Z ₀	P _{AVE} (Average Heating)	Models 4314B, 4391A			Model 43, 4304A, 4308	Model APM-16, 5010B, 5011, ACM, BPME
					CW Mode Power	PEP% Mode	MOD Mode		
Table A Multiple Carriers		$\frac{400}{\sqrt{2}}$ V	1600 W	400 W	-	1600 W	-	-	400W
Table B CW		$\frac{100}{\sqrt{2}}$ V	100 W	100 W	100 W	100 W	0%	100 W	100W
Table C AM 100% Mod.		$\frac{200}{\sqrt{2}}$ V	400 W	150 W	100 W	400 W	100%	100 W	150 W
Table D AM 75% Mod.		$\frac{173}{\sqrt{2}}$ V	300 W	127 W	100 W	300 W	73%	100 W	127 W
Table E SSB 1 Tone		$\frac{100}{\sqrt{2}}$ V	100 W	100 W	100 W	100 W	0%	100 W	100 W
Table F SSB 2 Tones		$\frac{100}{\sqrt{2}}$ V	100 W	50 W	25 W	100 W	100%	40.5 W	50 W
Table G SSB Voice		$\frac{100}{\sqrt{2}}$ V	100 W	-	-	100 W	-	-	-
Table H TV Black Level		$\frac{100}{\sqrt{2}}$ V	100 W	60.1 W	Models 4314B and 4391A only			59.6 W	60.1 W
Table I Pulse		$\frac{100}{\sqrt{2}}$ V	100 W	10 W	-	100 W	100%	-	10 W
Table J Pulse		$\sqrt{400Z_0}$	400 W	100 W	130 W	400 W	-	130 W	100 W

Required length of cable to equal 1/2 or 1 wavelength when added to a THRULINE® Wattmeter


When a Model APM-16, 43, 4431, 4314B or 4391A is used to match a load to a transmitter and a good match is obtained, removing the instrument will not cause any change in the conditions, since a good 50 ohm load can be placed at the end of a 50 ohm transmission line of any length without altering conditions at the transmitter.

What happens when the load is not well matched, as with an antenna with a VSWR of 1.5 or 2.0? Since the length of line between a mismatched load and the source transforms the impedance of the load as seen at the source, line length now becomes critical. If the adjustments for maximum power transfer were made with the Model 43 in place, removing it shortens the line by four inches, plus two connectors. This still is no cause for concern at low frequencies where four to five inches is a small fraction of a wavelength. At higher frequencies; e.g., above 100 MHz, power output and frequency of the source may be affected.

It is a principle of transmission line theory that the impedance is identical on either side of 1/2 wavelengths. In order to duplicate the conditions in your transmission line with the above Model wattmeters either in or out of the line, it is only necessary to insert or remove one or more 1/2 wavelengths. This is easily done by making up a length of cable which, when added to the THRULINE®, equals one or more 1/2 wavelengths at the frequency of measurement. If more than one frequency is involved, one cable is needed for each frequency.

1) Physical cable length shown in inches is measured from end to end of outer conductor of connectors (TNC and N Male connectors), except for cables with UHF or Mini-UHF plugs where the cable length is measured from tip to tip of the center pins.

2) Dimensions shown are for solid polyethylene cable (e.g., RG-58C/U, RG-8/U) which has 66% the velocity of propagation relative to air. If so-called "RG-58 type" or "RG-8 type" cables (which often contain foam polyethylene) are used, the dimensions in the graph must be multiplied by that cable's relative velocity (eg. 79%) divided by 66% (i.e., by a factor of $79\% \div 66\% = 1.2$).

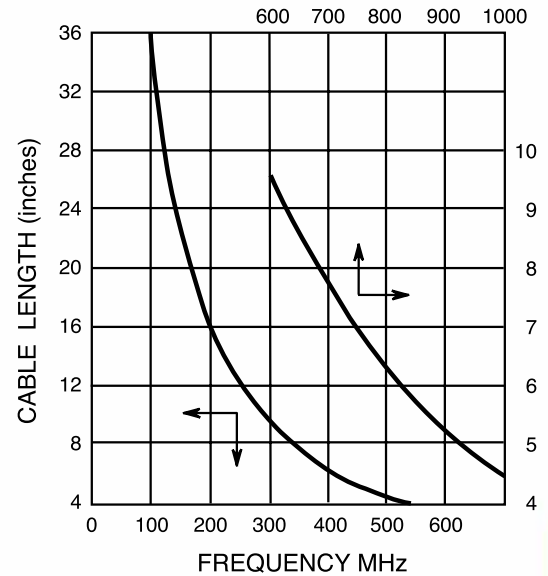

TYPICAL PEAK POWER RATINGS - OIL DIELECTRIC LOADS


	Avg. Power	Pulse Width (μs)				
		1	10	100	1000	5000
8135	150 W	10 kW	8.0 kW	5.75 kW	3.5 kW	2.0 kW
8201	500 W	200 kW	150 kW	105 kW	57 kW	25 kW
8251	1000 W	200 kW	150 kW	105 kW	57 kW	25 kW
8890 Series	2.5 kW	150 kW	115 kW	80 kW	54 kW	22 kW
8920 Series	5 kW	150 kW	115 kW	80 kW	54 kW	22 kW
8930 Series	10 kW	150 kW	120 kW	85 kW	55 kW	30 kW

TYPICAL PEAK POWER RATINGS - DIRECT WATER COOLED LOADS


	Avg. Power	Pulse Width (μs)				
		1	10	100	1000	5000
8730 Series	10 kW	100 kW	77 kW	56 kW	32 kW	16 kW
8740 Series	20 kW	250 kW	190 kW	135 kW	75 kW	35 kW
8750 Series	30 kW	250 kW	190 kW	135 kW	75 kW	40 kW
8760 Series	40 kW	250 kW	190 kW	145 kW	90 kW	55 kW
8770 Series	50 kW	250 kW	190 kW	145 kW	97 kW	65 kW
8790 Series	80 kW	250 kW	210 kW	170 kW	130 kW	100 kW

Note: The duty factor should be such that the average power rating of the load is never exceeded.

Transmission Line Power Rating

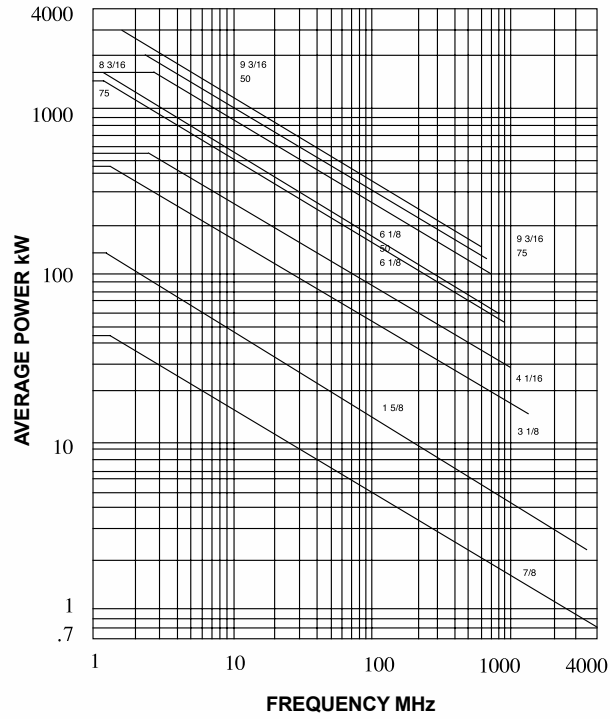

Transmission Line Attenuation

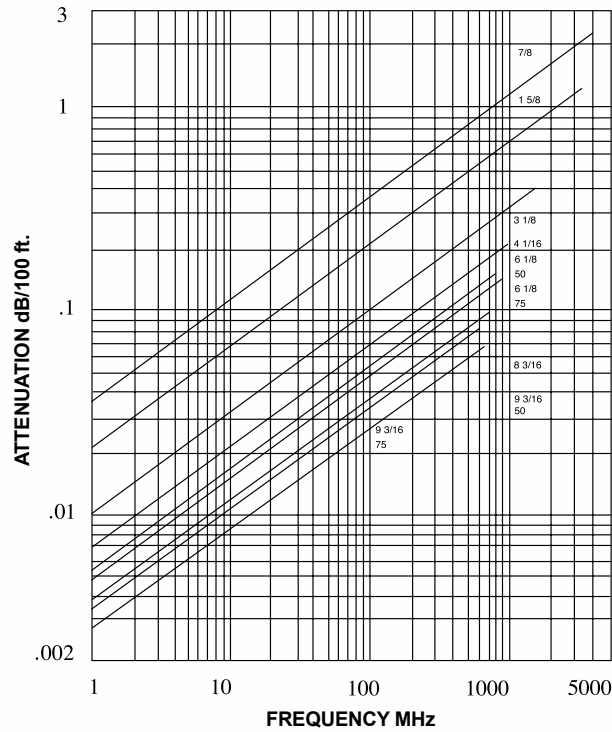

Index

1J-950.....	46	5D.....	46	15KB32.....	49
1J-1100.....	46	5E-400.....	46	15KB52.....	49
2.5J-950.....	46	5E-800.....	46	15KB62.....	49
2.5J-1100.....	46	5J-950.....	46	15KC3.....	48
2-6A.....	60	5J-1100.....	46	15KC5.....	49
2-18A.....	60	5-NT.....	50	15KC6.....	49
2-18T.....	50	5-T.....	50	15KC32.....	49
2-A.....	60	10-6A.....	60	15KC52.....	49
2-A-MFN-20.....	5	10-18A.....	60	15KC62.....	49
2-NT.....	50	10-18T.....	50	15KH1.....	48
2-T.....	50	10-A.....	60	15KH12.....	48
3-A.....	60	10A.....	46	025-2.....	46
5-6A.....	60	10-A-MFN-30.....	5	25-6A.....	60
5-18A.....	60	10B.....	46	25-6T.....	50
5-18T.....	50	10C.....	46	25-18A.....	60
5-030-3.....	67	10D.....	46	25-18T.....	50
5-1070-2.....	67	10E-400.....	46	25-A.....	60
5-1134-3.....	67	10E-800.....	46	25A.....	46
5-1375.....	66	10J-950.....	46	25-A-MFN-30.....	5
5-A.....	60	10J-1100.....	46	25B.....	46
5A.....	46	10KB1.....	48	25C.....	46
5A1230.....	66	10KB3.....	48	25-CT.....	52
5A1587.....	66	10KB5.....	49	25D.....	46
5A2226.....	22, 66	10KB6.....	49	25E-400.....	46
5A2228-1.....	7	10KB12.....	48	25E-800.....	46
5A2228-3.....	7	10KB32.....	48	25J-950.....	46
5A2229.....	22, 66	10KB52.....	49	25J-1100.....	46
5A2238-1.....	7	10KB62.....	49	25KB1.....	48
5A2238-3.....	6	10KC1.....	48	25KB3.....	48
5A2238-4.....	20	10KC3.....	48	25KB5.....	49
5A2264-09-MF-10.....	20, 22	10KC5.....	49	25KB6.....	49
5A2436.....	6	10KC6.....	49	25KB12.....	48
5A2653-0R4NL5.....	2	10KC32.....	48	25KB32.....	48
5A2653-3R5NL4.....	2	10KC52.....	49	25KB52.....	49
5A2653-6L2.....	20, 21, 25	10KC62.....	49	25KB62.....	49
5A2653-10.....	5, 6, 22	10KH1.....	48	25KC3.....	48
5A2745-1.....	2	10KH3.....	48	25KC5.....	49
5A2918-11-6.....	25	10KH6.....	49	25KC6.....	49
5A2976-10-2.....	15	10KH12.....	48	25KC32.....	48
5A5000-1.....	20	10KH32.....	48, 49	25KC52.....	49
5A5001-1.....	20	10KH62.....	49	25KC62.....	49
5A5002-1.....	20, 25	10-NT.....	50	25KH1.....	48
5A5002-6.....	2	10-T.....	50	25KH3.....	48
5-A-MFN-20.....	5	15KB1.....	48	25KH6.....	49
5B.....	46	15KB3.....	48	25KH12.....	48
5B2229-510H-3.....	2	15KB5.....	49	25KH32.....	48
5B2230.....	7	15KB6.....	49	25-NT.....	50
5C.....	46	15KB12.....	48	25-T.....	50

Index

030-2	46	50KH62	49	100KH3	48
30KB3	48	50-NT	51	100KH32	48
30KB5	49	50-T	51	100KH62	49
30KB6	49	060-1	46	100-NST	51
30KB32	49	060-2	46	100-SA	61
30KB52	49	60KB5	49	100-SA-MFN-40	5
30KB62	49	60KB6	49	100-ST	51
30KC3	48	60KB52	49	110-1	46
30KC5	49	60KB62	49	150-1	46
30KC6	49	60KC5	49	150-2	46
30KC32	49	60KC6	49	150-A	61
30KC52	49	60KC52	49	150-CT	52
30KC62	49	60KC62	49	150-SA	61
040-1	46	72-2	63	150-ST	51
040-2	46	72R	63	150-T	51
43	36	74	63	150-WA	61
43P	36	75-A	61	150-WT	51
050-1	46	080-1	46	151-CT	52
050-2	46	080-2	46	200-1	46
50-6A	61	80KB6	49	200-2	46
50-6T	51	80KC6	49	250-2	46
50-18A	61	095-1	46	250A	46
50-18T	51	095-2	46	250B	46
50-A	61	100-6A	61	250B1	48
50A	46	100-6T	51	250B3	48
50-A-MFN-30	5	100-A	61	250B12	48
50B	46	100A	46	250B32	48
50C	46	100B	46	250C	46
50-CT	52	100B1	48	250C1	48
50D	46	100B3	48	250C3	48
50E-400	46	100B12	48	250C12	48
50E-800	46	100B32	48	250C32	48
50H	46	100C	46	250C62	49
50J-950	46	100C1	48	250-CT	52
50J-1100	46	100C3	48	250D	46
50KB3	48	100C12	48	250E-400	46
50KB5	49	100C32	48	250E-800	46
50KB6	49	100-CT	52	250H	46
50KB32	48	100D	46	250J-950	46
50KB62	49	100E-400	46	250J-1100	46
50KC3	48	100E-800	46	250KH6	49
50KC5	49	100H	46	275-1	46
50KC6	49	100J-950	46	300-A	61
50KC32	48	100J-1100	46	300B1	48
50KC62	49	100KB6	49	300B12	48
50KH3	48	100KB62	49	300C1	48
50KH6	49	100KC6	49	300C12	48
50KH32	48	100KC62	49	300-CT	52



Index

300H12.....	48	500B3.....	48	718	63
300SC13	54	500B12.....	48	750-CT	52
300-T	51	500B32.....	48	801-1	46
300-WA	61	500B62.....	49	801-2	46
300-WT	51	500C.....	46	920-5000-XT	20
400-2	46	500C1.....	48	920-5012S.....	22
400-50	47	500C3.....	48	920-7020S.....	21
400-75	47	500C12.....	48	920-7022	25
400-125.....	47	500C32.....	48	920-AT500	7
400-225.....	47	500C62.....	49	920-SH-42S	4
400-400.....	47	500-CT	52	920-SHPC-OPS.....	5, 6
400-750.....	47	500D.....	46	920-SHPC-REF	5, 6
425-1	46	500E-400.....	46	920-SK-4000.....	2
430-2	47	500E-800.....	46	920-SK-4500.....	2
430-3	47	500H.....	46	920-VPM3	21, 22, 25
430-7	47	500H12.....	48	1000-A*	61
430-8	47	500H32.....	48	1000A.....	46
430-13	47	500J-950	47	1000B.....	46
430-20	47	500J-1100	47	1000B1.....	48
430-22	47	500-WA	61	1000B3.....	48
430-26	47	500-WT	51	1000B6.....	49
430-27	47	501-50	47	1000B12.....	48
430-33	47	501-75	47	1000B32.....	48
430-48	47	501-125.....	47	1000B62.....	49
430-57	47	501-225.....	47	1000C.....	46
430-61	47	501-400.....	47	1000C1.....	48
430-65	47	553-25	47	1000C3.....	48
430-86	47	553-50	47	1000C6.....	49
430-157.....	47	553-75	47	1000C12.....	48
430-169.....	47	553-125.....	47	1000C32.....	48
430-205.....	47	553-225.....	47	1000C62.....	49
430-208.....	47	553-401.....	47	1000D.....	46
430-217.....	47	553-750.....	47	1000E-400.....	46
430-247.....	47	600-A.....	61	1000E-800.....	46
430-248.....	47	600B1.....	48	1000H.....	46
430-249.....	47	600B3.....	48	1000H1.....	48
430-253.....	47	600B12.....	48	1000H12.....	48
430-254.....	47	600B32.....	49	1000H32.....	48
430-255.....	47	600C1.....	48	1000H62.....	49
430-256.....	47	600C3.....	48	1000J-950	47
430-258.....	47	600C12.....	48	1000J-1100	47
430-263.....	47	600C32.....	49	1000P	46
430-264.....	47	600H12.....	48	1000-T	51
430-265.....	47	600-T.....	51	1000-WA*	61
430-266.....	47	606-50	47	1000-WT	51
500A.....	46	606-75	47	1500B1.....	48
500B.....	46	606-125.....	47	1500B3.....	48
500B1.....	48	606-400.....	47	1500B5.....	49

Index

1500B12.....	48	3000B12.....	48	4027A60M.....	11, 16
1500B32.....	49	3000B32.....	49	4027A100M.....	11, 16
1500B52.....	49	3000B52.....	49	4027A150M.....	11, 16
1500C1.....	48	3000B62.....	49	4027A250K.....	11, 16, 17
1500C3.....	48	3000C1.....	48	4027A400K.....	11, 16, 17
1500C5.....	49	3000C3.....	48	4027A800K.....	11, 16, 17
1500C12.....	48	3000C5.....	49	4027A Series.....	11
1500C32.....	49	3000C6.....	49	4027F2M.....	12, 16, 17
1500C52.....	49	3000C12.....	48	4027F10M.....	12, 16, 17
1500-CT.....	52	3000C32.....	49	4027F60M.....	12
1500H1.....	48	3000C52.....	49	4027F Series.....	12
1500H12.....	48	3000C62.....	49	4028A2M.....	13, 18
1500-WA*.....	61	3000H1.....	48	4028A3M.....	13, 18
2500A.....	47	3000H12.....	48	4028A4M.....	13, 18
2500B.....	47	3126A.....	32	4028A10M.....	13, 18
2500B1.....	48	3127-035.....	45	4028A25M.....	13, 18
2500B3.....	48	3127-040.....	45	4028A250K.....	13, 18
2500B5.....	49	3127-055.....	45	4028A400K.....	13, 18
2500B6.....	49	3127-075.....	45	4028B3M.....	13, 18
2500B12.....	48	3127-080.....	45	4028B10M.....	13, 18
2500B32.....	48	3127A.....	32, 48	4028B Series.....	13
2500B62.....	49	3127 Series.....	45	4028C10M.....	13
2500C.....	47	3128A.....	33	4028C Series.....	13
2500C1.....	48	3129.....	30	4028 Series.....	13
2500C3.....	48	3140.....	30, 31	4042.....	29
2500C5.....	49	3140A4.....	30, 31	4042-1-430505-0201.....	29
2500C6.....	49	3140A8.....	30, 31	4043.....	29
2500C12.....	48	3141.....	29	4043-1-440505-0201.....	29
2500C32.....	48	3170-058-1.....	66	4043-1-450505-0201.....	29
2500C52.....	49	3170-058-3.....	66	4043-1-460505-0201.....	29
2500C62.....	49	3170-058-5.....	66	4043-1-470505-0201.....	29
2500-CT.....	52	3170-058-9.....	66	4043-1-480505-0201.....	29
2500D.....	46	3170B.....	34	4043-1-490505-0201.....	29
2500E-400.....	47	3171B.....	35	4044.....	29
2500E-800.....	47	3171B020.....	35	4044-1-440404-0201.....	29
2500H.....	46	3610-031.....	66	4044-1-450404-0201.....	29
2500H1.....	48	4020 Series.....	10	4044-1-460404-0201.....	29
2500H3.....	48	4021.....	10, 16, 17	4044-1-470404-0201.....	29
2500H12.....	48	4022.....	10, 16	4044-1-480404-0201.....	29
2500H32.....	48	4023A3G.....	10	4044-1-490404-0201.....	29
2500H62.....	49	4024.....	10, 16, 17	4045.....	29
2500J-950.....	47	4025.....	10, 16, 17	4210A100.....	43
2500J-1100.....	47	4027A2M.....	11, 16, 17	4220-097-1.....	66
2500P.....	46	4027A4M.....	11, 16, 17	4220-097-7.....	66
3000B1.....	48	4027A10M.....	11, 16, 17	4220-097-10.....	66
3000B3.....	48	4027A12M.....	11, 16, 17	4220-097-13.....	66
3000B5.....	49	4027A25M.....	11, 16, 17	4220-097-16.....	66
3000B6.....	49	4027A35M.....	11, 16	4220-097-17.....	66



Index

4230-006-1.....	44	4240-500-6.....	5	4902-020.....	65
4230-018.....	44	4240-500-10.....	5	4905-000.....	44
4230-059.....	44	4240-550.....	5	4909-000.....	44
4240-002.....	64	4273.....	62	5000-030.....	7
4240-012.....	64	4273-020.....	62	5000-035.....	66
4240-018.....	64	4274-025.....	47	5000A.....	47
4240-025.....	64	4274-050.....	47	5000B.....	47
4240-031.....	64	4275.....	62	5000B1.....	48
4240-050.....	64	4275-020.....	62	5000B3.....	48
4240-062.....	64	4275-025.....	62	5000B5.....	49
4240-063.....	64	4300-061.....	66	5000B12.....	48
4240-080.....	64	4300-085.....	66	5000B32.....	48
4240-090.....	64	4300A055.....	66	5000B52.....	49
4240-096.....	64	4300A085.....	66	5000B62.....	49
4240-100.....	64	4300A215.....	66	5000C.....	47
4240-125.....	64	4304A.....	38	5000C1.....	48
4240-132.....	64	4305A.....	37	5000C3.....	48
4240-156.....	64	4308.....	38	5000C5.....	49
4240-160.....	64	4314C.....	37	5000C6.....	49
4240-165.....	65	4391A.....	41	5000C12.....	48
4240-179.....	64	4410-1.....	39	5000C32.....	48
4240-180.....	65	4410-2.....	39	5000C52.....	49
4240-194.....	65	4410-3.....	39	5000C62.....	49
4240-201.....	65	4410-4.....	39	5000E-400.....	47
4240-208.....	64	4410-5.....	39	5000E-800.....	47
4240-220.....	65	4410-6.....	39	5000H.....	46
4240-244.....	65	4410-7.....	39	5000H1.....	48
4240-260.....	65	4410-8.....	39	5000H3.....	48
4240-268.....	64	4421-038.....	15	5000H12.....	48
4240-278.....	64	4421B540-2.....	15	5000H32.....	48
4240-334.....	64	4422.....	15	5000J-950.....	47
4240-336S.....	64	4431.....	36	5000J-1100.....	47
4240-344.....	64	4521.....	42	5000P.....	46
4240-346.....	64	4522.....	42	5000-XT.....	20, 26
4240-363.....	64	4522-002-5.....	33, 44	5010B.....	26
4240-400.....	65	4526.....	42	5012D.....	23
4240-401.....	65	4527.....	42	5014.....	26
4240-402.....	7	4600-020.....	65	5016D.....	23
4240-403.....	7	4600-025.....	65	5017D.....	23
4240-404.....	7	4610-000.....	44	5018D.....	23
4240-405.....	7	4642-010.....	44	5019D.....	23
4240-406.....	7	4712-015.....	65	6000B1.....	48
4240-407.....	7	4712-020.....	65	6000B3.....	48
4240-408.....	7	4715-000.....	44	6000B5.....	49
4240-409.....	7	4723-000.....	44	6000B6.....	49
4240-410.....	7	4723-020.....	44	6000B12.....	48
4240-411.....	7	4801-100.....	44	6000B32.....	49
4240-500-1.....	5	4802-000.....	44	6000B52.....	49

Index

6000B62.....	49	8325	59	8890-320	53
6000C1.....	48	8327-300.....	59	8891-300.....	53
6000C3.....	48	8329-300.....	59	8891-315.....	53
6000C5.....	49	8329-300 w/ BA-300-115	59	8891-320.....	53
6000C6.....	49	8329-300 w/ BA-300-230	59	8891D300.....	54
6000C12.....	48	8401	53	8892-300.....	53
6000C32.....	49	8630-013.....	67	8892-315.....	53
6000C52.....	49	8631B115.....	58	8892-320.....	53
6000C62.....	49	8631B230.....	58	8892-333.....	67
6000H1.....	48	8631B230-6	58	8892D13-30	54
6000H12.....	48	8635B115.....	58	8892D300.....	54
6771-011	67	8635B230.....	58	8892D320.....	54
6772B011.....	67	8638B115.....	58	8895-300.....	53
6810-220.....	45	8638B230.....	58	8895-315.....	53
6810-230.....	45	8640-066.....	67	8895-320.....	53
6810-250.....	45	8645B115.....	58	8897-315.....	53
6810-265.....	45	8645B230.....	58	8897-320.....	53
6810-307.....	45	8645B230-6	58	8921	16, 19, 53
6810-309-7.....	45	8646B115.....	58	8921A100.....	17
7000A545.....	7	8646B230.....	58	8921SC13	16, 19, 54
7000A845.....	7	8646B230-6	58	8922	53
7002A148.....	6	8655B115-6.....	58	8922D.....	54
7002A218-2	2	8655B230-5	58	8926	53
7002A219-1	2	8655B230-6	58	8926D.....	54
7002A220-1	4	8656B115-6.....	58	8927	53
7002A225-1	66	8656B230-5	58	8927D.....	54
7002A850.....	15	8656B230-6	58	8931-115	16, 19, 53
7002C870.....	66	8720	55	8931-115SC13	16, 19, 54
7020 Series	21	8726	55	8931-230	16, 19, 53
7022 Series	24, 25	8730A.....	55	8931-230SC13.....	16, 19, 54
7181	63	8731	55	8931A400-115	17
7422	63	8731-031-1.....	67	8931A400-230	17, 19
7431	63	8738A.....	55	8932-115	53
7441	63	8776	55	8932-230.....	53
7500-072-1.....	66	8860	53	8936-115	53
7500-072-2.....	66	8861	53	8936-230.....	53
7500-072-4.....	66	8862	53	8936D115.....	54
7500-076.....	66	8862D.....	54	8936D230.....	54
8000B1.....	48	8862D13-30	54	8937-115	53
8000B6.....	49	8863	53	8937-230.....	53
8000C3.....	49	8864	53	8941-115SC13	54
8000C6.....	49	8864D.....	54	8941-230SC13.....	54
8135	53	8865SC13	54	10000B.....	47
8141	53	8890-008.....	67	10000E-400.....	47
8201	53	8890-017.....	67	10000E-800.....	47
8251	16, 53	8890-300.....	16, 53	10000H.....	47
8251D.....	54	8890-300SC13.....	16	10000P.....	46
8251D7-16	54	8890-315.....	53	ACM 500.....	27

Index

ACM Series	27	APM-250H	40	DA10V3U15	57
Antenna & Cable Monitor	27	APM-500B	40	DA10V3U30	57
Antenna Testers	7	APM-500C	40	DA15F15	57
APM-1B	40	APM-500D	40	DA15F30	57
APM-1C	40	APM-500E-400	40	DA15U15	57
APM-1E-400	40	APM-500E-800	40	DA15U30	57
APM-1E-800	40	APM-500H	40	DA25-4U15	57
APM-2.5B	40	APM-1000B	40	DA25-4U30	57
APM-2.5D	40	APM-1000C	40	DA25F15	57
APM-2.5E-400	40	APM-1000E-400	40	DA25F30	57
APM-2.5E-800	40	APM-1000E-800	40	DA25U15	57
APM-5A	40	APM-1000H	40	DA25U30	57
APM-5B	40	AT-500	7	DA25V3F15	57
APM-5C	40	AT-800	7	DA25V3F30	57
APM-5D	40	AT Series	7	DA25V3U15	57
APM-5E-400	40	BDS Calibration Cart	19	DA25V3U30	57
APM-5E-800	40	BDS Series	9	DA25V4U15	57
APM-5H	40	BIRD-BTY-TMI3C	2	DA25V4U30	57
APM-10A	40	BPME Series	28	DA40-5U15	57
APM-10B	40	Broadcast Power Monitor	28	DA40-5U30	57
APM-10C	40	Calibration Cart	16	DA40F15	57
APM-10D	40	Cases	66	DA40F30	57
APM-10E-400	40	CC-6	66	DA40U30	57
APM-10E-800	40	Channel Power Monitor	29	DA Series	56, 57
APM-10H	40	Channel Power Monitor		DC Cable Assemblies	66
APM-16	40	Display	29	Digital Air Loads	56, 57
APM-25B	40	Coaxial Selector Switches	63	Digital Power Meter	20
APM-25C	40	Conduction Cooled Loads	52	Directional Power Sensors	26
APM-25D	40	Convection Cooled		Displays	30
APM-25E-400	40	Attenuators	60, 61	Dollies	67
APM-25E-800	40	Convection Cooled Loads ..	50, 51	DPM Series	20
APM-50C	40	Coolants	67	DPS Series	26
APM-50D	40	Coupling Kits	65	EC-1	66
APM-50E-400	40	CPM Series	29	Econoloads	55
APM-50E-800	40	DA5F15	57	Field Replacement Meter	43
APM-100A	40	DA5F30	57	Flange-To-Flange Adapters	65
APM-100B	40	DA5U15	57	High Power Calibration Cart	18
APM-100C	40	DA5U30	57	High-Speed	
APM-100D	40	DA10F15	57	Wattcher® Series	34, 35
APM-100E-400	40	DA10F30	57	Interseries Adapter Kits	65
APM-100E-800	40	DA10U15	57	Interseries Adapters	65
APM-100H	40	DA10U30	57	Load and Cooling Accessories	67
APM-250A	40	DA10V1F15	57	Market-Specific Oil Loads	54
APM-250B	40	DA10V1F30	57	Miscellaneous Power	
APM-250C	40	DA10V1U15	57	Accessories	66
APM-250D	40	DA10V1U30	57	Moduloads	58
APM-250E-400	40	DA10V3F15	57	MSCC7 Series	17
APM-250E-800	40	DA10V3F30	57	Multi-Sensor Calibration Cart	17

Index

Oil Convection Cooled	
Attenuators	59
Oil Loads	53
PA-FNFE	5
PA-FNME	5
PA-MNFE	2, 5
PA-MNME	5
Panel Mount Wattmeters	42
PC SignalHawk	6
Plug-In Elements	46 - 49
Portable Wattmeters	36 - 41
QC Adapters, Connectors	65
Rack Mount SignalHawk	5
Replacement Resistors	67
RF Monitor/Alarms	32 - 35
Rigid Line Sections	44
Rigid Line Wattmeters	45
RP5-1976-11	7
RPK5-898-2	67
RPK5-898-3	67
RPK5-898-4	67
RPK5-898-6	67
RPK5-898-7	67
RPK5A2388	67
RPK5A2393	67
RPK5B2431	6
RPK6770-120	67
RPK6770A120	67
RPK8738A072	67
RPK8755-027-2	67
RPK8755-027-3	67
RPK8755-027-4	67
RPK8755-027-5	67
RPK8792-010-1	67
SA-3600XT	26
SA-6000XT	26
SCC7 Series	16
SCC8 Series	18
SH-36S	26
SH-36S-PC	6
SH-36S-RM	5
SH-361S	26
SH-362	26
SH-362S	26
SiteHawk Analyzer	2, 3
SK05T-12003002	2
SK-200-TC	2, 3
SK-4000-TC	2, 3
SK-4500-TC	2, 3
SK-CAL-MN-C	2
SK-CONN-OTG-2	2
SK-DOCK-1203	2
SK-TC-MNFN-1M	2
SK-TP-112	2
SPM-021	4
SPM-AS001	4
SPM-AS003	4
SPM-AS004	4
SPM-AS005	4
SPM-AS006	4
SPM-AS007	4
SPM-AS008	4
Statistical Power Sensor	24, 25
Thermoswitches For Air-Cooled Loads	67
ThruLine RF Directional	36 - 42, 44
ThruLine Wattmeter Components	44
ThruLine Wattmeter Movement Kit	43
TPM1	31
TPM3	31
TPM Series	29, 31
Transmitter Power Monitor	31
Variable RF Signal Samplers	62
VIP System	8
VPM3	21, 22, 25
Water-Cooled Accessories	67
Wattcher® Series	32, 33
Wattmeter Batteries	66
Wideband Power Sensor	22
WPS Series	22, 24, 25

Bird's mission is to serve as one of the industry's leading RF experts in Coverage Solutions, Off-Air Testing, Radio Infrastructure, Sensor Solutions and Test and Measurement. We strive to provide our customers with the highest quality, innovative RF products and services all based around total reliability.

All Bird products can be serviced and calibrated by the **Bird Service Center** (BSC). Bird Service Centers and Service Partners are located World Wide providing a full range of service and support for your Bird Products.

To view the catalog online or download, go to
www.birdrf.com



30303 Aurora Rd.
Solon, OH 44139
Phone 866.695.4569
www.birdrf.com

